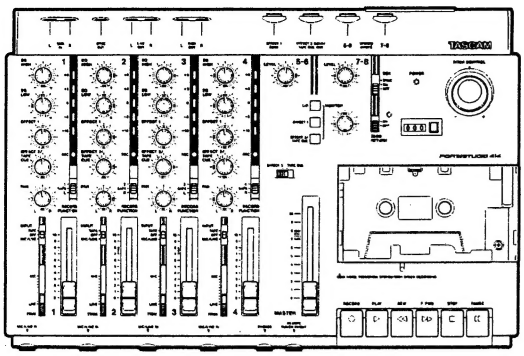

TASCAM
TEAC Professional Division

SERVICE MANUAL

414
PORTASTUDIO

NOTES

As regards the resistors and capacitors, refer to the circuit diagrams and the PCB ass'y drawings contained in this manual.

* PC boards shown viewed from parts side.
* Parts marked with * require longer deliver time.
* ⚠ Parts marked with this sign are safety critical components. They must always be replaced with identical components – refer to the TEAC Parts List and ensure exact replacement.
* Parts not shown in the parts lists, or parts, though listed, having no parts numbers, are not general "ready-to-supply" parts.
* Parts of [ ] mark can be used only with the version designated.
  [US/C]:U.S.A./CANADA [E]:EUROPE [UK]:U.K. [A]:AUSTRALIA
  [J]:JAPAN

注意

標準抵抗,コンデンサーは省略してあります。回路図および基板図を参照してください。

- ●プリント基板図は部品面が示されています。
- ●＊印の部品は納期が若干かかります。あらかじめご了承ください。
- ●⚠印は安全規格重要部品です。交換するときは必ずティアック指定の部品を使用してください。
- ●リストされていない部品は原則としてサービス供給部品として取扱っていません。
- ●仕向先
  [US/C]:U.S.A./CANADA [E]:EUROPE [UK]:U.K. [A]:AUSTRALIA
  [J]:JAPAN

INSTRUCTIONS FOR SERVICE PERSONNEL

BEFORE RETURNING APPLIANCE TO THE CUSTOMER, MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT.

Effective : October, 1996

D00298100A

1. SPECIFICATIONS

仕様

MECHANICAL

Type : Compact cassette (C-30 to C-90), High-Bias (CrO2)
Track Format : 4-track/4-channel
Head Configuration :
4-channel record/play head (permalloy) × 1
4-channel erase head (ferrite) × 1
Motor : DC servo motor × 1
Tape Speed : 9.5 cm/sec. (3-3/4 ips)
Pitch Control : ± 12% (approx.)
Wow and Flutter : 0.12% WRMS or less
Fast Winding Time : 110 sec.(approx.) with C-60

ELECTRONICS

Mixer Section

MIC/LINE INPUT, Ch.1-4
Input Impedance : 50k ohms
Nominal Input Level : -50 dBV (3 mV) (Trim Max.)
-10 dBV (0.3 V) (Trim Min.)
Maximum Input Level : +5 dBV (1.8 V) at Trim Min.

STEREO INPUT, Ch.5-6/ Ch.7-8 (1/4" phone jack x 2)
Input Impedance : 10 kohms
Nominal Input Level : -10 dBV (0.3 V)
Maximum Input Level : +5 dBV (1.8 V)

SUB INPUT (RCA jack x 2)
Input Impedance : 10 kohms
Nominal Input Level : -10 dBV (0.3 V)
Maximum Input Level : +5 dBV (1.8 V)

LINE OUTPUT (RCA jack x 2)
Output Impedance : 100 ohms
Nominal Output Level : -10 dBV (0.3 V)
Maximum Output Level : +5 dBV (1.8 V)

EFFECT 1 SEND (1/4" phone jack)
Output Impedance : 100 ohms
Nominal Output Level : -10 dBV (0.3 V)
Maximum Output Level : +5 dBV (1.8 V)

EFFECT 2 SEND/TAPE CUE OUT (1/4" phone jack)
Output Impedance : 100 ohms
Nominal Output Level : -10 dBV (0.3 V)
Maximum Output Level : +5 dBV (1.8 V)

SYNC OUT (RCA jack x 1)
Output Impedance : 100 ohms
Nominal Output Level : -10 dBV (0.3 V)

MON OUT (RCA jack x 2)
Output Impedance : 600 ohms
Nominal Output Level : -10 dBV (0.3 V)
Maximum Output Level : +5 dBV (1.8 V)

PHONES (1/4" stereo phone jack x 1)
Nominal Load Impedance : 30 ohms
Maximum Output Level : 60 mW + 60 mW

Equalizer
HIGH (Shelving) : 10 kHz, ± 10 dB
LOW (Shelving) : 100 Hz, ± 10 dB

Frequency Response
MIC IN to LINE OUT : 20 Hz to 20 kHz, ± 3 dB
LINE IN to LINE OUT : 20 Hz to 20 kHz, ± 2 dB
LINE IN to MONITOR OUT : 20 Hz to 20 kHz, ± 3 dB
LINE IN to EFFECT SEND : 20 Hz to 20 kHz, ± 2 dB
LINE IN to PHONES : 40 Hz to 20 kHz, ± 3 dB

Signal-to-Noise Ratio (20 Hz to 20 kHz, B.P.F. inserted)
1 MIC IN to LINE OUT :
63 dB (at a nominal input level of -60 dBV)
4 MIC INs to LINE OUT :
58 dB (at a nominal input level of -60dBV)
1 LINE IN to LINE OUT :
70 dB (at a nominal input level of -10dBV)
4 LINE INs to LINE OUT :
65 dB (at a nominal input level of -10dBV)

Distortion
1 MIC IN to LINE OUT : 0.05% (at 1 kHz, 15 dB above nominal input level with 30 kHz-L.P.F. inserted)
1 LINE IN to LINE OUT : 0.05% (at 1 kHz, nominal input level with 30 kHz-L.P.F. inserted)

Crosstalk : 55 dB (at 1 kHz, nominal input level with 1 kHz-B.P.F. inserted)

Recorder Section

Record channel : 4-track single direction
Noise Reduction : dbx Type II
Overall Frequency Response :
40 Hz to 16 kHz, ±3 dB (without dbx)
Overall Signal-to-Noise Ratio : 85 dB
(at 1 kHz, ref. to 3 % THD, "A" weighted, with dbx)
Total Harmonic Distortion : 1.0 %
(at 1 kHz, nominal input level, with dbx)
Channel Separation : 70 dB
(at 1 kHz, nominal input level, with dbx)
Erasure : 70 dB or better (at 1 kHz, B.P.F. inserted)

OTHERS

Power Requirements :
USA/CANADA : 120 V AC, 60 Hz
U.K./EUROPE : 230 V AC, 50 Hz
AUSTRALIA : 240 V AC, 50 Hz
JAPAN : 100 V AC, 50-60 Hz

Power Consumption : 11W
Dimensions (W x H x D) :
367×100×247 mm (14-7/16″ ×3-15/16″ ×9-3/4″)
Weight (Net) : 2.1 kg (4-10/16 lbs.)

In these specifications, 0 dBV is referenced to 1 Volt. Actual voltage levels are also given in parenthesis (0.316 V for -10 dBV rounded off to 0.3 V).

* dbx is a registered trademark of dbx Incorporated.
* Changes in specifications and features may be made without notice or obligation.

* dbxおよびdbxマークはdbxインコーポレーテッドの登録商標です。
* dbxシステムはdbxインコーポレーテッドの実地権に基づいて製造されています。
*仕様および外観は、改善のため予告なく変更することがあります。

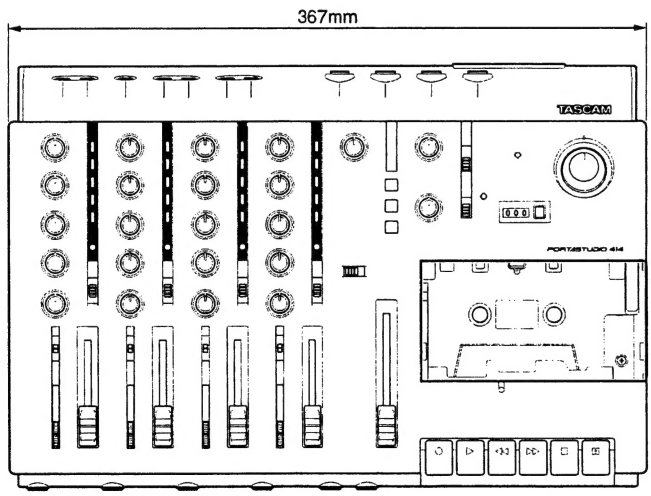

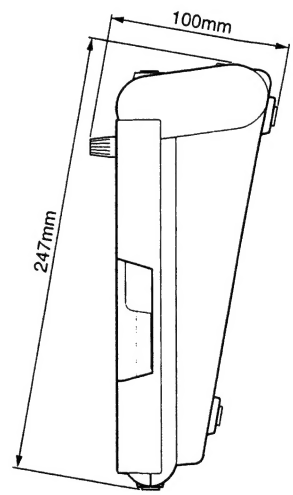

2. MECHANICAL CHECKS AND ADJUSTMENTS
機構部の確認と調整

2-1. Wow and flutter

1. Connect the wow and flutter meter to SYNC OUT.
2. The wow and flutter value when the test tape MXT-111 is played back should be within the standard given below :
   Standard : 0.2 % or less (WRMS)

2-1. ワウ・フラッタ

1. SYNC OUTにワウ・フラッタ・メータを接続する。
2. テスト・テープMXT-111を再生したときのワウ・フラッタ値は下記規格内であること。
   規格 : 0.2%以下 (WRMS)

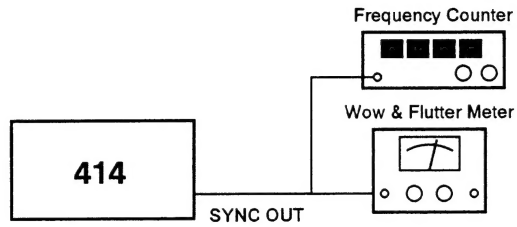

Fig. 2-1

2-2. Tape speed

1. Connect the frequency counter to SYNC OUT.
2. Set the PITCH CONTROL knob to the center position.
3. Turn the POWER switch ON, then play back the test tape. Leave the tape in this state for at least one minute, in order to let the capstan motor rotate and warm up.
4. Play back the middle portion of the test tape MXT-111, then adjust trimmer resistor R622 (Fig. 3-1) on the BOTTOM PCB till a frequency counter reading of 3000 Hz ± 5 Hz is reached.
5. After adjustment, check the following at both the beginning and the end of tape.
   Frequency reading : 3000 Hz ± 60 Hz

2-2. テープ・スピード

1. SYNC OUTに周波数カウンタを接続する。
2. PITCH CONTROLノブをセンターにセットする。
3. キャプスタン・モータを回転させウォーミング・アップさせるために、テスト・テープを装着し再生状態にして少なくとも1分間そのままにしておく。
4. テスト・テープMXT-111の中間部を再生したとき、周波数カウンタの値が3000Hz ± 5Hzになるようにに BOTTOM PCBの半固定抵抗R622 (図3-1) を調整する。
5. 調整後、テープの巻始めと巻終りで、次の値が得られるかを確認する。
   速度偏差 : 3000Hz ± 60Hz

2-3. Pitch control

After the tape speed has been adjusted, play back the test tape MXT-111, turn the PITCH CONTROL knob to the maximum and minimum positions so that the tape speed variations are as follows :

Standard : ± 10 % or more
(2700 Hz or less, 3300 Hz or more)

2-3. ピッチ・コントロール

テープ・スピード調整後、テスト・テープMXT-111を再生し、PITCH CONTROLノブを最大、最小に回したときのテープ・スピード可変幅は次の通りであること。

規格 : ± 10 %以上 (2700Hz以下、3300Hz以上)

2-4. Reel torque

1. Take-up torque/back tension torque
   The torque values when the test tape MTT-8111 for measuring torques is played back should be as follows:
   Take-up torque (right reel) : 30 to 65 g•cm
   Back tension torque (left reel) : 2 to 6 g•cm
2. FF/REW torque
   Load the test tape MTT-8242 for measuring torques, then measure the starting torque when the unit is in FF and REW operation. The standard values are as follows:
   Torque in FF mode (right reel) : 55 to 140 g•cm
   Torque in REW mode (left reel) : 55 to 140 g•cm

2-5. R/P head azimuth

1. Refer to Figure 2-2 and connect the channel 1 TAPE OUT to the vertical input of an oscilloscope, and connect the channel 4 TAPE OUT to the horizonal input of the scope.
2. Play the 315 Hz and 6.3 kHz signals on test tape MXT-1161 and adjust azimuth adjustment screw for 0 degree phase shift between channels 1 and 4. (Refer to Figure 2-3)
3. Play the test tape MXT-112 and check for 45 degrees or less of phase shift between channel 1 and 2, channel 2 and 3, and channel 2 and 4.

Note) TAPE OUT (CH1) – P601-5 of BOTTOM PCB
TAPE OUT (CH2) – P601-6 of BOTTOM PCB
TAPE OUT (CH3) – P601-7 of BOTTOM PCB
TAPE OUT (CH4) – P601-8 of BOTTOM PCB

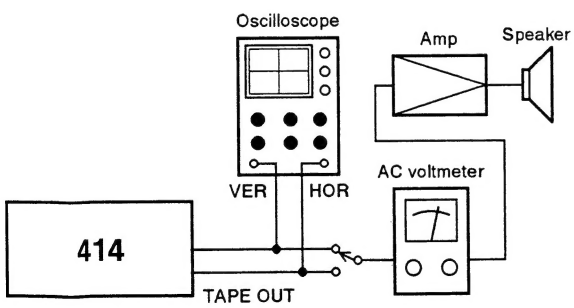

Fig. 2-2

2-4. リール・トルク

1. テイクアップ・トルク／バックテンション・トルク
   トルク測定用テスト・テープ MTT-8111を再生したときのトルク値は下記の通りであること。
   テイクアップ・トルク（右リール台） : 30～65g・cm
   バックテンション・トルク（左リール台）: 2～6g・cm
2. FF／REW トルク
   トルク測定用テスト・テープ MTT-8242を装着し、FF動作およびREW動作の起動トルクをそれぞれ測定する。
   規格値は次の通り。
   FF トルク（右リール台） : 55～140g・cm
   REW トルク（左リール台）: 55～140g・cm

2-5. 録再ヘッド・アジマス

1. 図2-2のようにCH1のTAPE OUTをオシロスコープのVER側に、CH4のTAPE OUTをHOR側に接続する。
2. テスト・テープ MXT-1161の315Hzおよび6.3kHzを再生して、CH1とCH4の位相が0° になるようにアジマス調整ネジを調整する。(図2-3)
3. テスト・テープ MXT-112を再生して、CH1-CH2、CH2-CH3、CH2-CH4の位相が45° 以内であることを確認する。

注) TAPE OUT (CH1) – BOTTOM PCBのP601-5
TAPE OUT (CH2) – BOTTOM PCBのP601-6
TAPE OUT (CH3) – BOTTOM PCBのP601-7
TAPE OUT (CH4) – BOTTOM PCBのP601-8

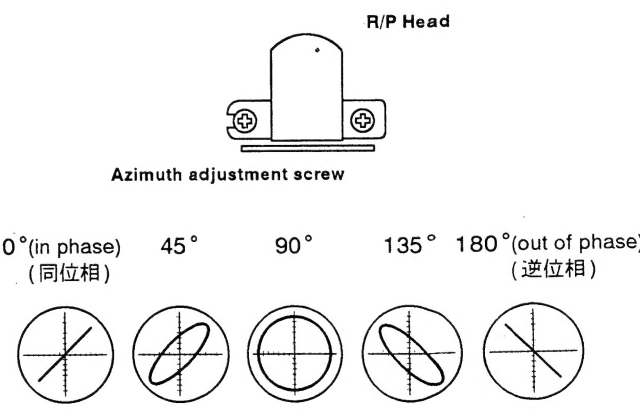

Fig. 2-3

3. AMPLIFIER CHECKS AND ADJUSTMENTS
録音・再生アンプの確認と調整

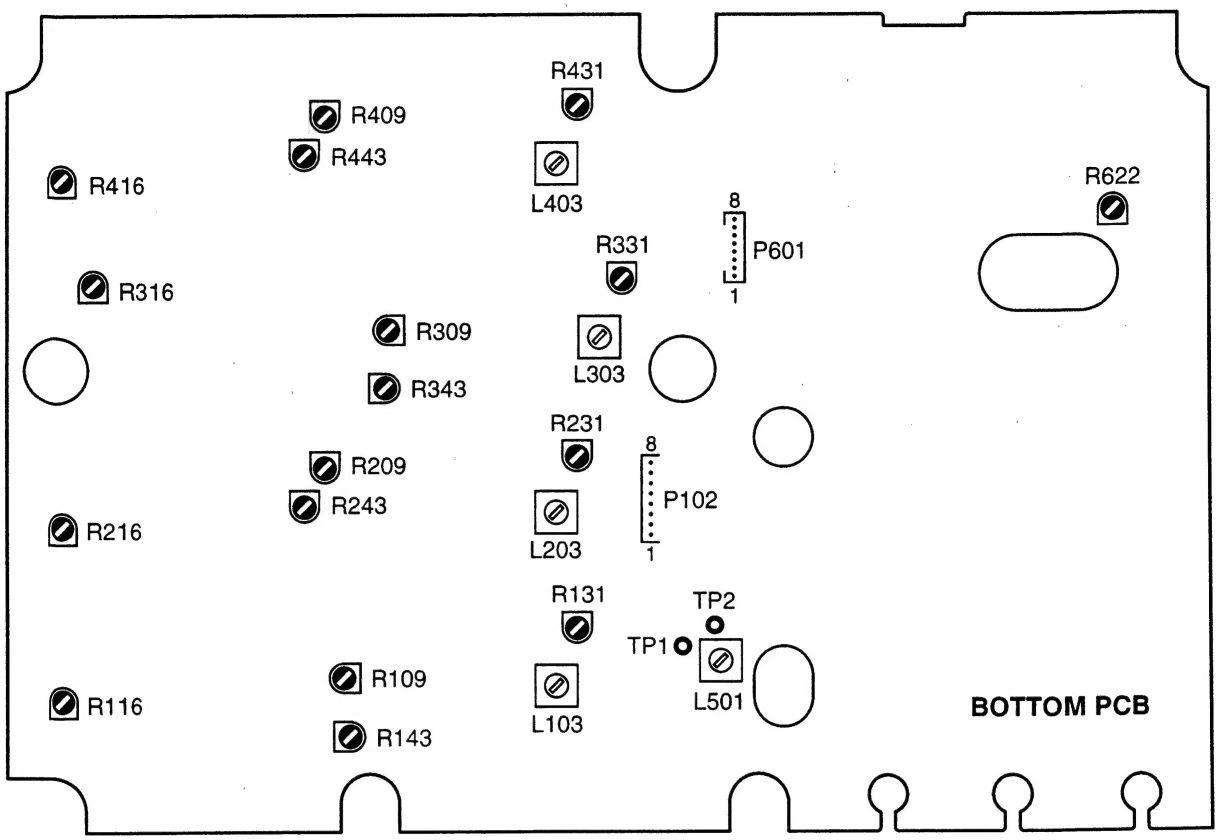

R109 (R209～R409)	Reproduce Reference Level	再生基準レベル
R116 (R216～R416)	dbx Timing	dbxタイミング
L501	Bias Oscillator Frequency	バイアス発振周波数
L103 (L203～L403)	Bias Amp (Erase)	バイアス・アンプ（消去）
R131 (R231～R431)	Bias Set	バイアス・セット
R143 (R243～R443)	Record Reference Level	録音基準レベル

Fig. 3-1 Adjustment and check points
調整個所および測定個所

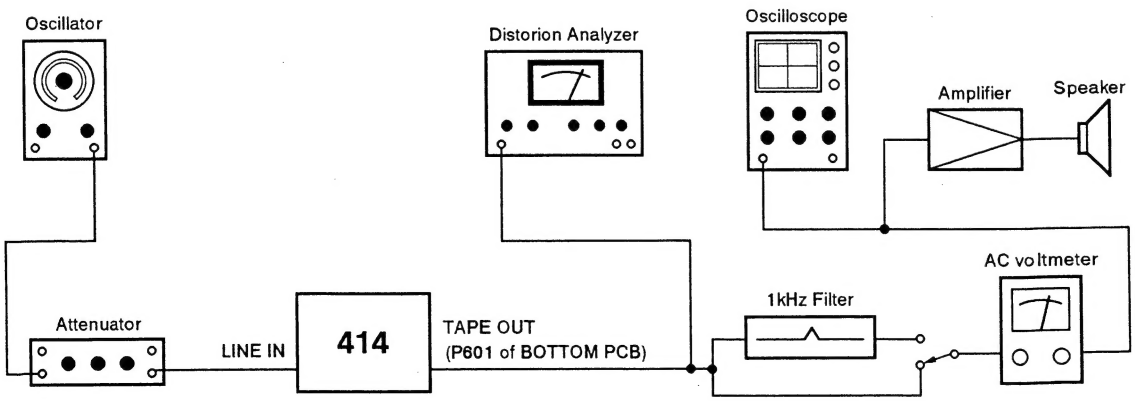

Fig. 3-2 Basic test setup

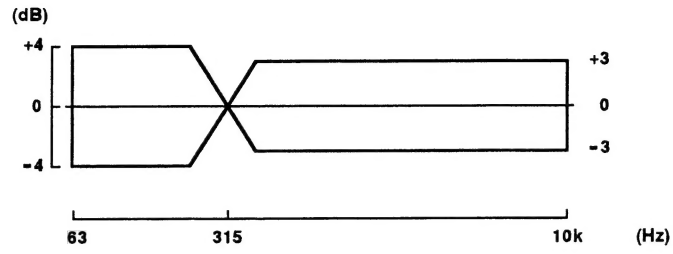

Fig. 3-3 Playback frequency
再生周波数特性

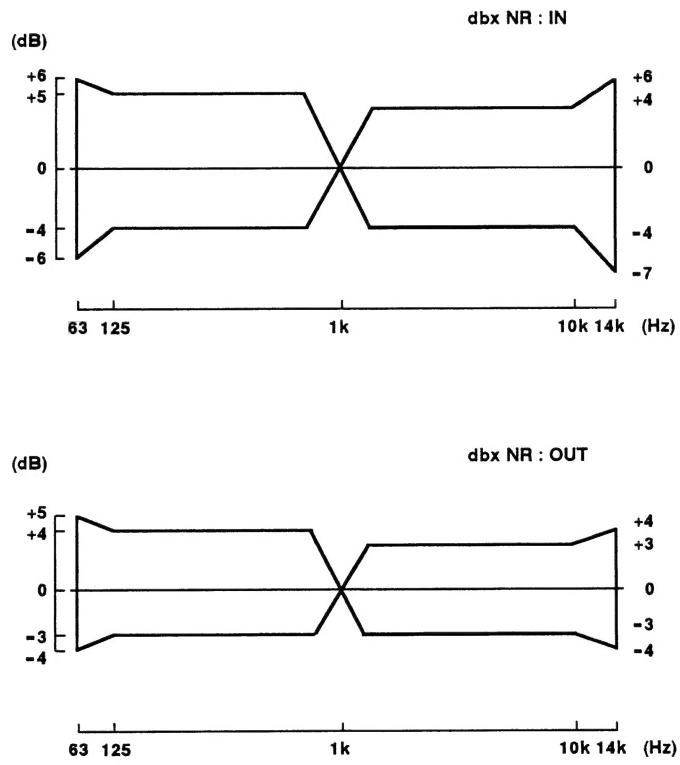

Fig. 3-4 Overall frequency response
録再周波数特性

3-1. Precautions

1. Before performing adjustments or checks, clean and demagnetize the entire tape path.
2. The AC voltmeter used in the procedures must have an input impedance of 1 MΩ or more.
3. 0 dBV corresponds 1.0 V.
4. For blank tape, use TEAC MTT-5563 or equivalent tapes.
5. Indication, for example, "R109 (R209 to R409)" means that R109 is for channel 1, R209 for channel 2, R309 for channel 3 and so on.
6. Refer to Figure 3-1 for location of adjustment points.

3-2. Playback System

Test Mode : PLAY
Measurement Point : TAPE OUT terminals

(TAPE OUT (CH1) – Pin 5 of BOTTOM PCB connector P601
TAPE OUT (CH2) – Pin 6 of BOTTOM PCB connector P601
TAPE OUT (CH3) – Pin 7 of BOTTOM PCB connector P601
TAPE OUT (CH4) – Pin 8 of BOTTOM PCB connector P601)

Adjustment Item	Preliminary	Input Signal	Adjustment Point	Measurement Method / Value Adjusted For
1. Reproduce Reference Level	Connection : Fig. 3-2	MXT – 112	R109 (R209 to R409)	– 10 dBV at output
2. Reproduce Frequency Response	Connection : Fig. 3-2	MXT – 1161	Check only	Standard : Fig. 3-3
3. Level Difference between Channels	Connection : Fig. 3-2	Same as above	Check only	63 Hz to 6.3 kHz : within 3 dB 6.3 kHz to 10 kHz : within 4 dB
4. Level Fluctuation	Connection : Fig. 3-2	Same as above	Check only	63 Hz to 6.3 kHz : within 2 dB 6.3 kHz to 12 kHz : within 3 dB
5. Reproduce S/N Ratio	Connection : Fig. 3-2 ; DIN AUDIO	——	Check only	Measure output when leader tape is played back with the unit set for nominal output level , and compare this reading with nominal output level. : 47 dB or more Defference between channels : within 4 dB

3-3. Recording System

Test Mode : REC/PLAY (unless otherwise specified)
Measurement Point : TAPE OUT terminals (unless otherwise specified)

Adjustment Item	Preliminary	Input Signal	Adjustment Point	Measurement Method / Value Adjusted For
1. dbx Timing	Connect the DC voltmeter between the pin 1 of R116 (R216 to R416) and GND.	——	R116 (R216 to R416)	A voltage reading of 18.4 ± 1 mV
2. Bias Oscillator Frequency	Frequency counter connected between TP1 (GND) and TP2 ; REC FUNCTION sw. : ON for all channels ; Transport : REC/PAUSE	——	L501	85 kHz ± 5 kHz as read on frequency counter

Adjustment Item	Preliminary	Input Signal	Adjustment point	Measurement Method / Value Adjusted For
3. Bias Amp (Erase)	Oscilloscope connected between terminals # 1 (3, 5,7) and GND of P102 (with the scope's probe set to × 10) ; REC FUNCTION sw. : ON for all channels ; Transport : REC/PAUSE	——	L103 (L203 to L403)	Maximum output as read on the scope connected between the specified terminals of P102 : Trminals # 1 and GND – for Ch.1 Trminals # 3 and GND – for Ch.2 Trminals # 5 and GND – for Ch.3 Trminals # 7 and GND – for Ch.4
4. Bias Set	Connection : Fig. 3-2 ; dBx NR : ON	1 kHz/10 kHz, – 30 dBV	R131 (R231 to R431)	Same output level at 1 kHz and 10 kHz signals as read off tape during recording them one after another
5. Record Reference Level	Connection : Fig. 3-2 ; dBx NR : ON	1 kHz, – 10 dBV	R143 (R243 to R443)	– 10 dBV output as read off tape during recording
6. Record Distortion	Connection : Fig. 3-2 ; dBx NR : OFF	Same as above	Check only	Standard : 2.0 % or less
7. Rec/Repro Frequency Responce	Connection : Fig. 3-2 ; dBx NR : ON/OFF	63 Hz to 14 kHz, – 30 dBV	Check only	Specs : Fig. 3-4
8. Level Difference between Channels	Connection : Fig. 3-2 ; dBx NR : OFF	40 Hz to 10 kHz, – 30 dBV	Check only	3 dB or less over 40 Hz to 6.3 kHz 4 dB or less over 6.3 kHz to 10 kHz
9. Level Fluctuation	Same as above	40 Hz to 10 kHz, – 30 dBV	Check only	3 dB or less over 40 Hz to 10 kHz
10. Crosstalk between Tracks	Connection : Fig. 3-2 ; dBx NR : OFF ; REC FUNCTION sw. : ON for Ch.1 and 3	125 Hz, – 10 dBV into Ch.1 and 3 ; No signal into Ch.2 and 4	Check only	Record the input signal, then rewind the tape and play the recording. Compare the output from Ch.1 and Ch.3 with that from Ch.2 and 4. ; Level difference : 35 dB or greater In a similar way, check also the reverse : leakage from Ch.2 and 4 into Ch.1 and 3.
11. Channel Separation	Connection : Fig. 3-2 (1 kHz B.P.F. inserted) ; REC FUNCTION sw. : ON for all channels ; dBx NR : OFF	1 kHz, – 10 dBV into Ch.1 and 3 ; No signal into Ch.2 and 4	Check only	Compare the output level from Ch.1 and 3 with that from Ch.2 and 4 as read off tape during recording. ; Level difference : 40 dB or greater In a similar way, check also the reverse : leakage from Ch.2 and 4 into Ch.1 and 3.
12. Erase Efficiency	Connection : Fig. 3-2 (1 kHz B.P.F. inserted) ; dBx NR : OFF	1 kHz, 0 dBV	Check only	Erase a part of a recorded section and play the tape to compare the level from the remaining recorded section with that from erased section. ; Level difference : 65 dB or greater
13. Rec/Repro S/N Ratio	Connection : Fig. 3-2 ; dBx NR : OFF ; DIN AUDIO	No input	Check only	Compare the output from the "no-signal" recording with nominal ouptut level. ; Level difference : 45 dB or greater Difference between channels : 4 dB or less

3-1. 注意

1. アンプ部の調整の前に、消去ヘッド, 録/再ヘッド, テープ走行部分をそれぞれ充分消磁し、クリーナ液で清掃して下さい。
2. レベル計は、入力インピーダンス1MΩ以上のものを使用して下さい。
3. 0dBV = 1.0Vで表示しています。
4. ブランク・テープは、TEAC MTT-5563または相当品を使用して下さい。
5. R109（R209～R409）と記されているボリュームの部番は、CH1（CH2～CH4）を示します。
6. 調整個所は、図3-1を参照して下さい。

3-2. 再生系

モード：PLAY
測定個所：TAPE OUT端子

（TAPE OUT (CH1) －BOTTOM PCBのP601-5
TAPE OUT (CH2) －BOTTOM PCBのP601-6
TAPE OUT (CH3) －BOTTOM PCBのP601-7
TAPE OUT (CH4) －BOTTOM PCBのP601-8）

調整項目	準備・設定	入力信号	調整個所	測定方法・調整値
1. 再生基準レベル	接続：図3-2	MXT－112	R109（R209～R409）	出力が－10dBVになるように調整
2.再生周波数特性	接続：図3-2	MXT－1161	チェック	規格：図3-3
3. チャンネル間レベル差	接続：図3-2	同上	チェック	63Hz～6.3kHz：3dB以内 6.3kHz～10kHz：4dB以内
4. レベル変動	接続：図3-2	同上	チェック	63Hz～6.3kHz：2dB以内 6.3kHz～12kHz：3dB以内
5. 再生S/N	接続：図3-2 DIN AUDIO	——	チェック	基準出力状態で、リーダー・テープ部を再生した時のノイズ・レベルと基準出力との比： 47dB以上 チャンネル差4dB以内

3-3. 録音系

モード： REC/PLAY（特に指示のある場合を除く）
測定個所： TAPE OUT端子（特に指示のある場合を除く）

調整項目	準備・設定	入力信号	調整個所	測定方法・調整値
1. dbx タイミング	R116（R216～R416）の1番ピンとGND間にDC電圧計を接続	——	R116（R216～R416）	電圧値が18.4±1mVになるように調整
2. バイアス発振周波数	TP1（GND）とTP2間に周波数カウンタを接続 REC FUNC. SW：全ch ON REC／PAUSE状態	——	L501	周波数が85kHz±5kHzになるように調整
3. バイアス・アンプ（消去）	P102－1（3, 5, 7）とGND間にオシロスコープを接続（プローブは×10にて使用） REC FUNC. SW：全ch ON REC／PAUSE状態	——	L103（L203～L403）	下記の端子間の出力が最大になるように調整 CH1：P102の1番端子－GND間 CH2：P102の3番端子－GND間 CH3：P102の5番端子－GND間 CH4：P102の7番端子－GND間
4. バイアス・セット	接続：図3-2 dBx NR：ON	1kHz, 10kHz／－30dBV	R131（R231～R431）	録音・再生したとき、1kHzと10kHzが同レベルになるように調整
5. 録音基準レベル	接続：図3-2 dBx NR：ON	1kHz／－10dBV	R143（R243～R443）	録音・再生したとき、出力が－10dBVになるように調整
6. 録音歪率	接続：図3-2 dBx NR：OFF	同上	チェック	規格：2.0％以下
7. 録再周波数特性	接続：図3-2 dBx NR：ON, OFF	63Hz～14kHz／－30dBV	チェック	規格：図3-4
8. チャンネル間レベル差	接続：図3-2 dBx NR：OFF	40Hz～10kHz／－30dBV	チェック	録再周波数特性規格内におけるch間のレベル差： 40Hz～6.3kHz　：3dB以内 6.3kHz～10kHz　：4dB以内
9. レベル変動	同上	40Hz～10kHz／－30dBV	チェック	録再周波数特性規格内におけるレベル変動： 40Hz～10kHz　：3dB以内
10. トラック間クロストーク	接続：図3-2 dBx NR：OFF REC FUNC. SW：1,3ch ON	1,3ch：125Hz／－10dBV 2,4ch：無信号	チェック	録音・再生したときの1,3chの再生出力と2,4chの再生出力の比： 35dB以上 2,4ch→1,3chの場合も同様
11. チャンネル・セパレーション	接続：図3-2 （1kHz B.P.F.使用） REC FUNC. SW：全ch ON dBx NR：OFF	1,3ch：1kHz／－10dBV 2,4ch：無信号	チェック	録音・再生したときの1,3chの再生出力と2,4chの再生出力の比： 40dB以上 2,4ch→1,3chの場合も同様
12. 消去率	接続：図3-2 （1kHz B.P.F.使用） dBx NR：OFF	1kHz／0dBV	チェック	録音部分の一部を残して消去した後、再生したときの未消去部分との比： 65dB以上
13. 録再S／N	接続：図3-2 dBx NR：OFF DIN AUDIO	無信号	チェック	基準出力と無信号録再出力レベルとの比： 45dB以上 チャンネル差：4dB以内

4. EXPLODED VIEWS AND PARTS LIST

分解図とパーツリスト

EXPLODED VIEW-1

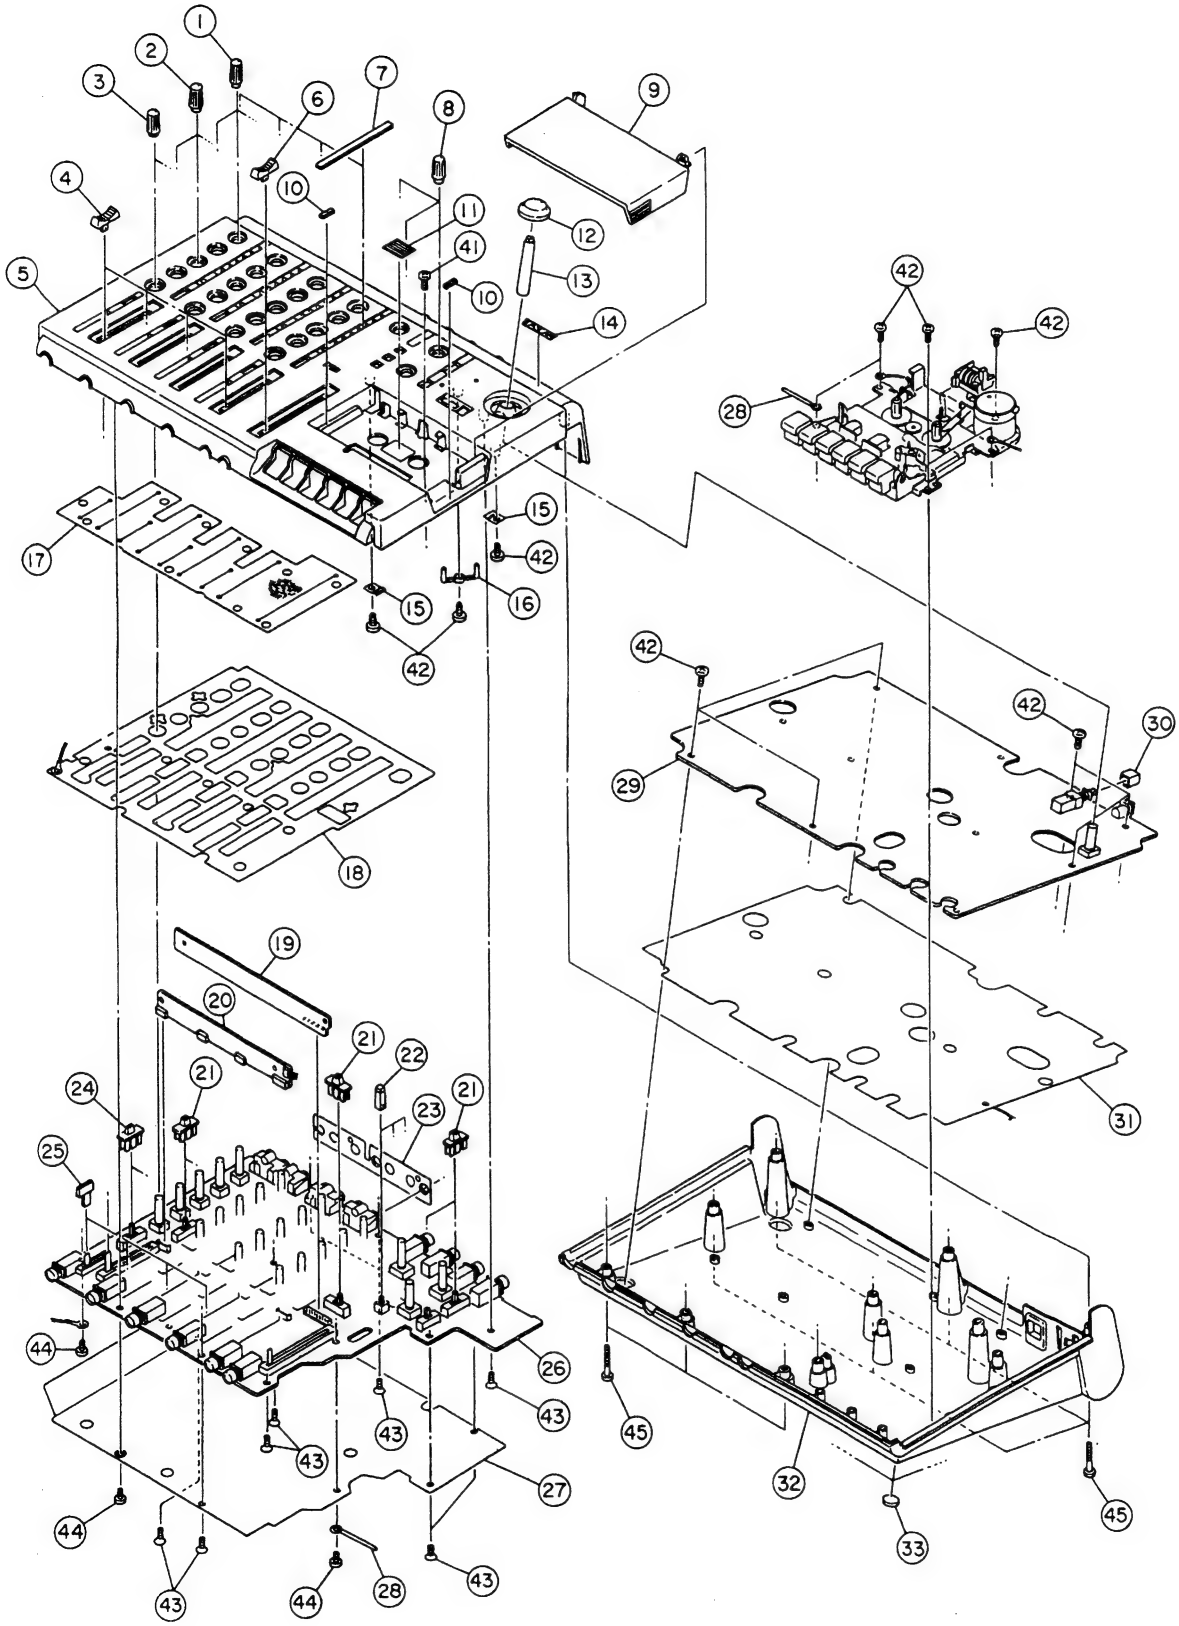

EXPLODED VIEW-1

REF. NO.	PARTS NO.	DESCRIPTION	REMARKS
1- 1	9260262700	KNOB, ROTARY N63/B09	
1- 2	9260262800	KNOB, ROTARY N63/G04	
1- 3	9260262900	KNOB, ROTARY N63/WHITE	
1- 4	M00004000A	KNOB, FADER OG	
1- 5	*9260271401	CABINET, TOP	
1- 6	M00004001A	KNOB, FADER RD	
1- 7	*9260271201	WINDOW, METER	
1- 8	9260269600	KNOB, ROTARY (ORANGE)	
1- 9	*9260282600	COVER, CASSETTE	
1-10	*9260225700	CUSHION, DOOR	
1-11	*9260205700	PLATE, REFLECT	
1-12	M00004200A	KNOB, PITCH GY	
1-13	9260271000	JOINT	
1-14	*9260271101	BADGE, TASCAM SILVER	
1-15	*9260282700	SPRING, COVER	
1-16	9260271600	LENS, LED	
1-17	*9260272100	BLIND, S-VR	
1-18	*9260272902	SHIELD SHEET, MIXER	
1-19	*9145200200	JUMP A PCB ASSY	
1-20	*9145200300	JUMP B PCB ASSY	
1-21	M00006100A	KNOB, SLIDE GY	
1-22	9260263300	KNOB, BUTTON COVER WHT/N63	
1-23	*9260283600	BLIND, PIN JACK	
1-24	M00462300A	KNOB, SLIDE	
1-25	9260271301	KNOB, TRIM	
1-26	*9145200100	MIXER PCB ASSY	
1-27	*9260282002	SHIELD ASSY	
1-28	*9788823059	HARNES CLIP, 3.3X6.0X54	
1-29	*9145201103	BOTTOM PCB ASSY	
1-30	5801503800	EJECT BUTTON, P-N15-A	
1-31	*9260272802	SHIELD SHEET, R/P	
1-32	*9260271501	CABINET, BOTTOM	
1-33	*9260262300	FOOT	
1-41	*9783613010	SCREW, BTT-P M3X10 (BLK)	
1-42	*9783603008	SCREW, BTT-P M3X8	
1-43	*9783133010	SCREW, FTT-P M3X10	
1-44	*9783603010	SCREW, BTT-P M3X10	
1-45	*9783613020	SCREW, BTT-P M3X20	

INCLUDED ACCESSORIES

REF. NO.	PARTS NO.	DESCRIPTION	REMARKS
	*9125115000	AC ADAPTOR, PS-P414 [US/C]	
	*9125115400	AC ADAPTOR, PS-P414 [A]	
	*9125115300	AC ADAPTOR, PS-P414 [UK]	
	*9125115800	AC ADAPTOR, PS-P414 [J]	
	*9125115200	AC ADAPTOR, PS-P414 [E]	
	*9101408400	OWNER'S MANUAL, ENGLISH [EXCEPT J]	
	*9101408500	OWNER'S MANUAL, FRENCH/GERMAN [E]	
	*9101408600	OWNER'S MANUAL, JAPANESE [J]	

EXPLODED VIEW-2

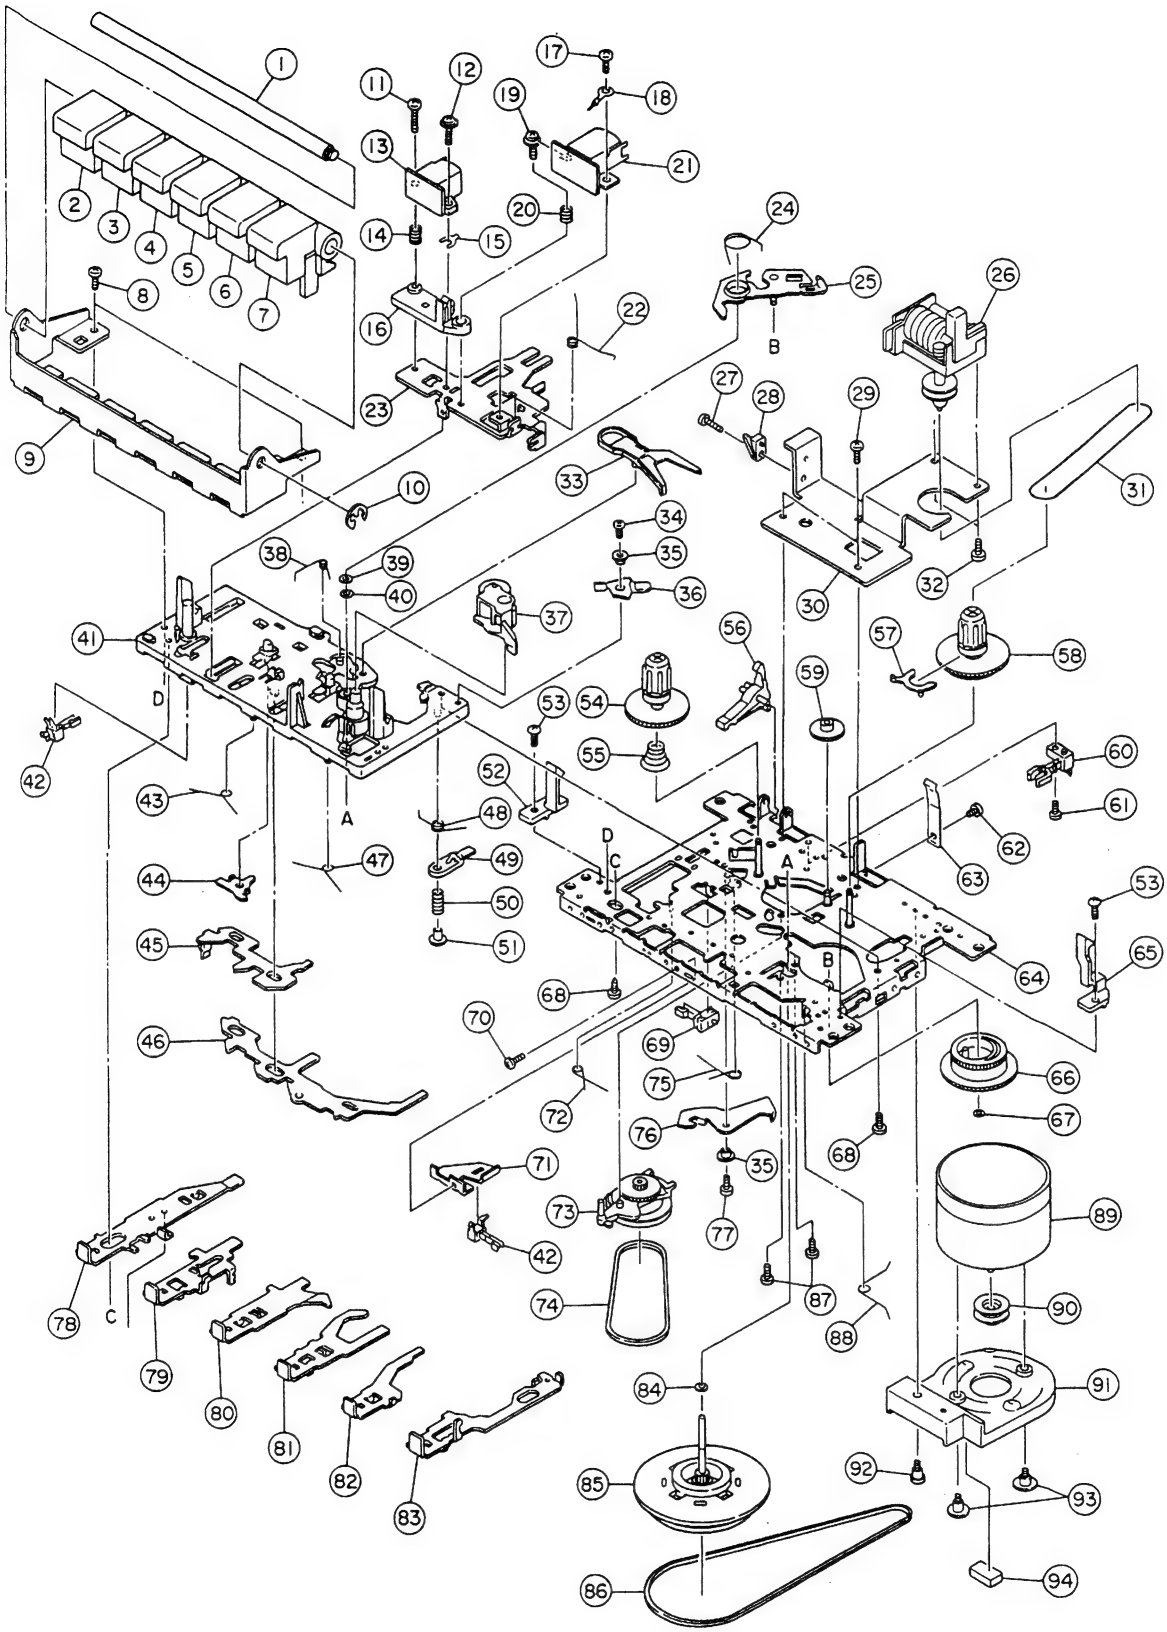

EXPLODED VIEW-2

REF. NO.	PARTS NO.	DESCRIPTION
2- 1	9278307000	BUTTON LEVER SHAFT
2- 2	9260272200	BUTTON (REC)
2- 3	9260272300	BUTTON (PLAY)
2- 4	9260272400	BUTTON (REW)
2- 5	9260272500	BUTTON (FF)
2- 6	9260272600	BUTTON (STOP)
2- 7	9260272700	BUTTON (PAUSE)
2- 8	*9278291700	TAPPING SCREW BTT-S M2X8
2- 9	*9278362800	B FRAME (H)
2-10	*9278362900	E-RING 3.2
2-11	*9278362300	SCREW M2X9
2-12	*9278362200	CAP SCREW M2X3
2-13	5378602100	ERASE HEAD 4-4
2-14	9278197900	E. H. SPRING
2-15	*9278305400	E HEAD SPACER
2-16	*9278305200	HEAD BASE
2-17	*9278362100	BIND SCREW M2X3
2-18	*9278361900	LUG PLATE(3B)2.0
2-19	*9278202700	AZIMUTH SCREW M2X7
2-20	9278198400	AZIMUTH SPRING
2-21	5378602000	R/P HEAD
2-22	*9278360700	PANEL P SPRING
2-23	*9278303800	HEAD PANEL
2-24	9278268900	GEAR PLATE SPRING
2-25	9278361100	GEAR PLATE ASSY
2-26	M00467400A	COUNTER, MK394S-008
2-27	*9783202006	SCREW, BTT-S M2X6
2-28	9135035800	PUSH SW, 1-1 SPPB22
2-29	*9783152006	SCREW, FTT-P M2X6
2-30	*9260270900	BRACKET, COUNTER
2-31	9260130700	COUNTER BELT
2-32	*9783132606	SCREW, FTT-P M2.6X6
2-33	9278307300	SENSING LEVER
2-34	*9278363300	SCREW, PS-TITE M2X3
2-35	*9278292200	P ARM COLLAR
2-36	9278363100	P ARM
2-37	9278306800	PINCH ROLLER ARM ASSY
2-38	9278268600	M CONTROL SPRING
2-39	*9278362500	P WASHER CUT 1.45X3.2X0.5
2-40	*9278362700	P WASHER 2.1X4X0.13
2-41	*9278360200	BASE ASSY
2-42	9278304200	LEAF SWITCH, MSW-1541T
2-43	9278267300	BUTTON LEVER SPRING (A)
2-44	*9278267800	PR STOPPER
2-45	*9278304700	SWITCH ACTUATOR
2-46	*9278266201	PUSH BUTTON ACTUATOR
2-47	9278268000	BUTTON LEVER SPRING (B)
2-48	9278306400	P CONTORL SPRING
2-49	9278306500	PAUSE LEVER
2-50	9278267100	PAUSE LEVER SPRING

REF. NO.	PARTS NO.	DESCRIPTION
2-51	9278267200	PAUSE STOPPER
2-52	*9260223300	CASSETTE GUIDE (L)
2-53	*9783202006	SCREW, BTT-S M2X6
2-54	9278304800	SUPPLY REEL ASSY
2-55	9278361400	BACK TENSION SPRING
2-56	9278200300	RECORD SAFETY LEVER
2-57	9278306900	SENSER
2-58	9278306600	TAKE UP REEL ASSY
2-59	9278199900	FF GEAR
2-60	9278304300	LEAF SWITCH, MSW-1275
2-61	*9278304600	TAPPING SCREW C-TITE M2X5
2-62	*9278362000	DEL TITE SCREW M2X3
2-63	9278305100	PACK SPRING
2-64	*9278360400	CHASSIS ASSY
2-65	*9260223400	CASSETTE GUIDE (R)
2-66	9278289100	CAM GEAR
2-67	*9278291400	P WASHER CUT 1.2X3.8X0.3
2-68	*9278202200	SCREW, P TAPPING BIND M2X5
2-69	9278292500	LEAF SW, MSW-17820-MVDO
2-70	*9278369100	CAMERA SCREW M2X5
2-71	*9278369000	SW BRACKET
2-72	9278267600	P.S. LEVER SPRING
2-73	9278361200	RF CLUTCH ASSY
2-74	9278289300	RF BELT
2-75	9278267900	REC BUTTON LEVER SPRING
2-76	9278363000	REC ARM
2-77	*9278202100	C TAPPING SCREW M2X4
2-78	9278266300	REC BUTTON LEVER
2-79	9278266400	PLAY BUTTON LEVER
2-80	9278360300	REW BUTTON LEVER
2-81	9278266600	FF BUTTON LEVER
2-82	9278303700	STOP BUTTON LEVER
2-83	9278306300	PAUSE BUTTON LEVER
2-84	*9278308400	P WASHER 2X3.5X0.4
2-85	9278361300	FLYWHEEL ASSY
2-86	9278361600	MAIN BELT
2-87	*9278291000	SCREW, TAPPING M2X4.5
2-88	9278267500	E ACTUATOR SPRING
2-89	9278361800	CAPSTAN MOTOR, EG-530KD-2F
2-90	9278361500	MOTOR PULLY
2-91	*9278304900	MOTOR BRACKET
2-92	*9278290400	MB SCREW
2-93	*9278290100	MOTOR COLLAR SCREW
2-94	*9278361700	ANTI VIBRATION FELT MAT

5. PC BOARDS AND PARTS LIST

基板図とパーツ・リスト

JUMP A PCB

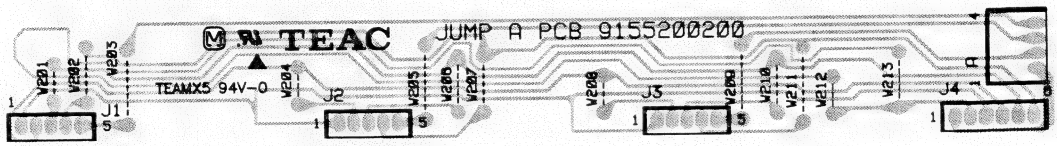

JUMP B PCB

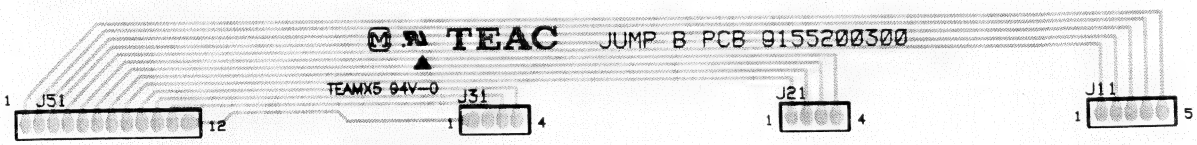

MIXER PCB

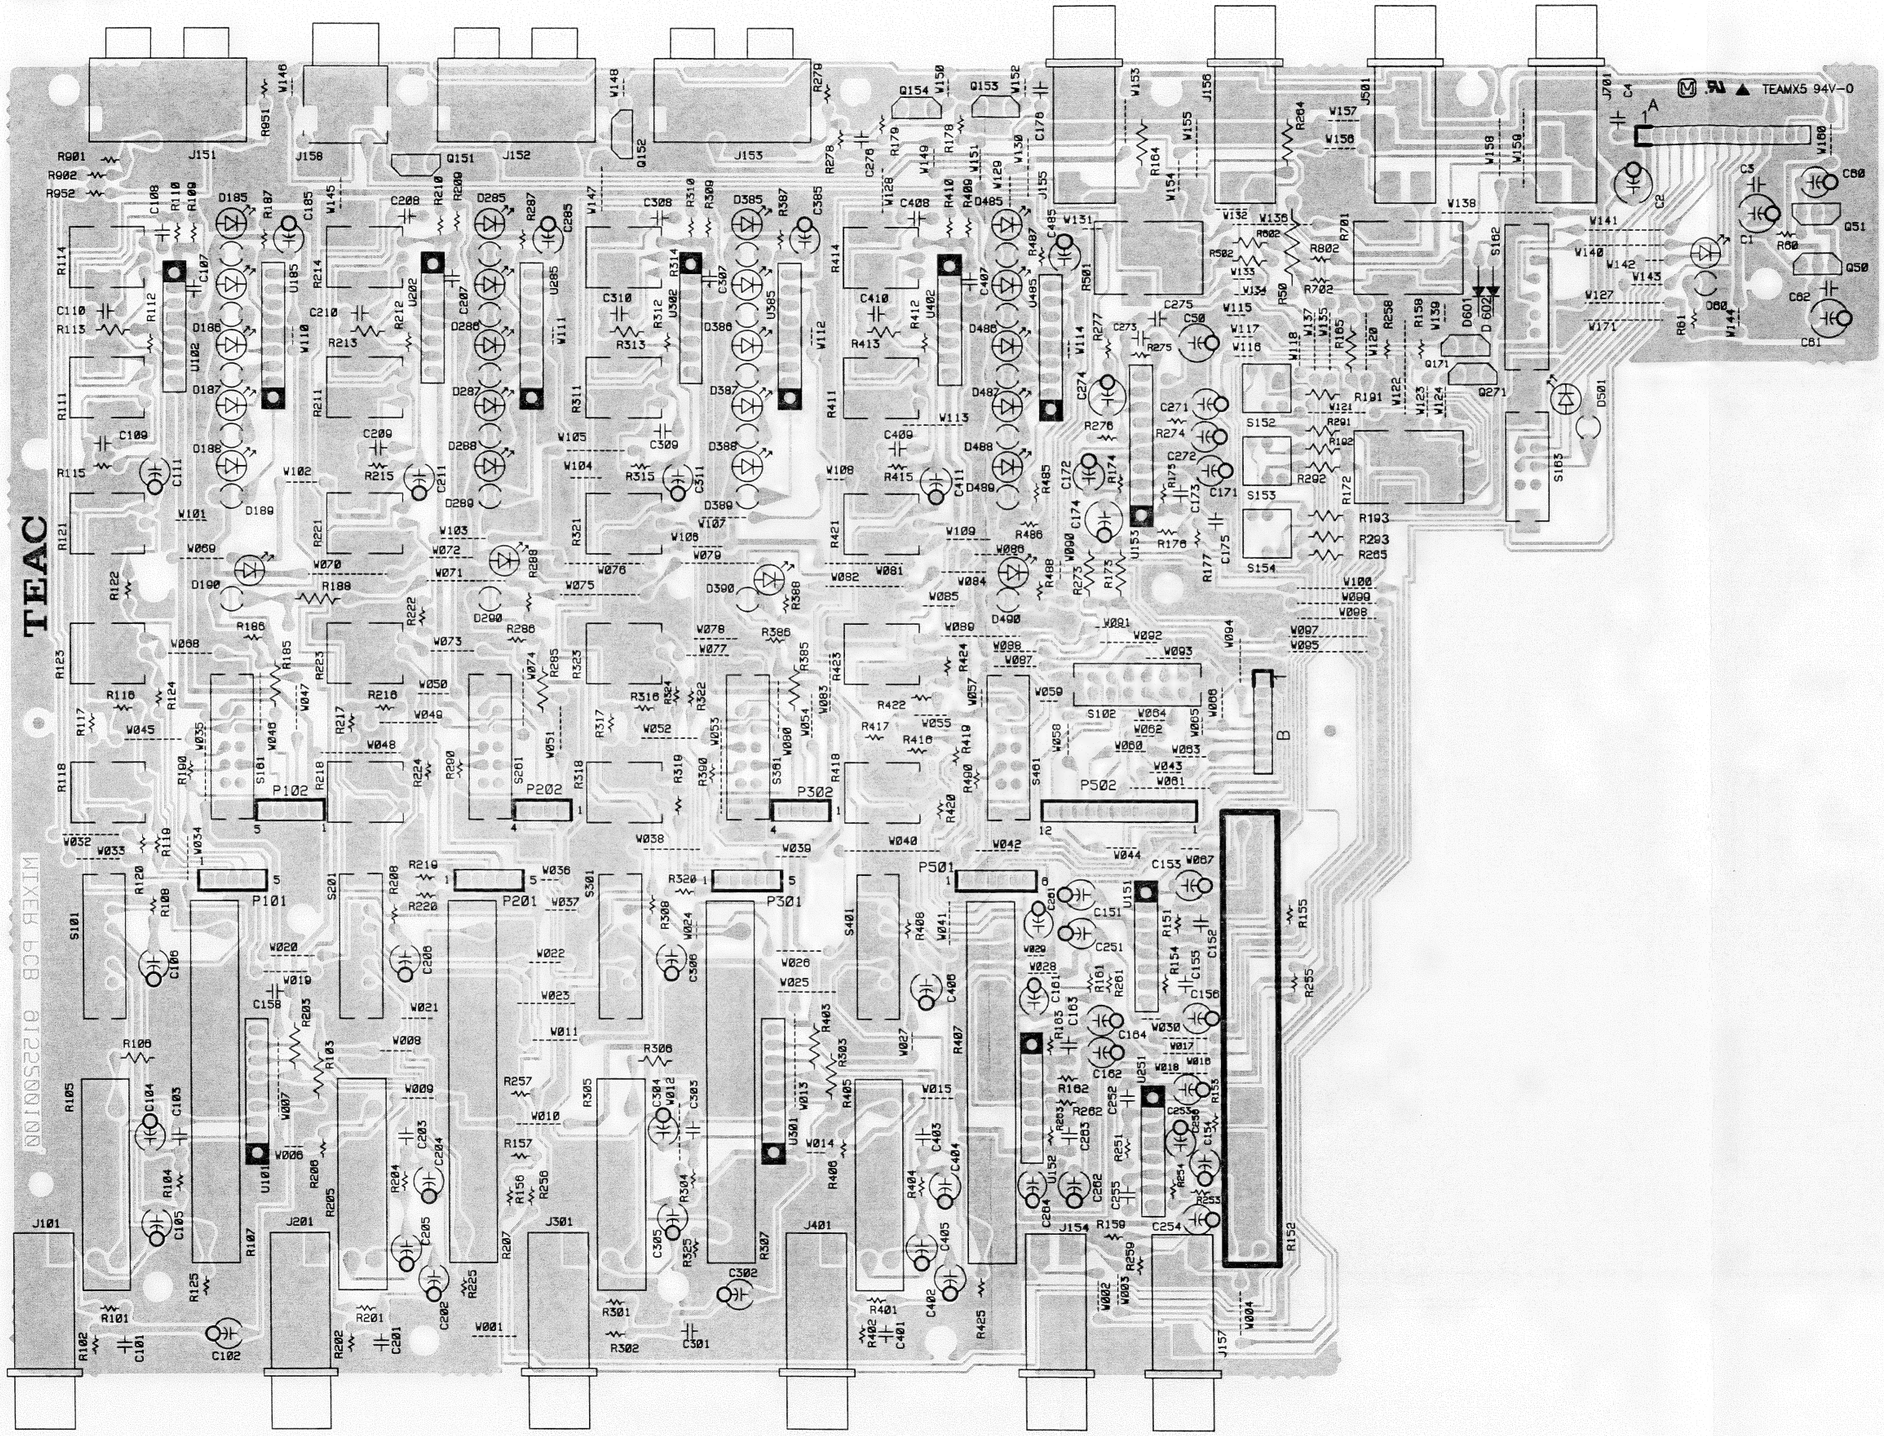
TEAC
MIXER BD 012550010
TEAMX5 94V-0
J151
J152
J153
J156
J158
J701
P101
P102
P201
P202
P301
P302
P501
P502
J101
J201
J301
J401
J154
J157
S101
S102
S152
S153
S154
S162
S163
S201
S301
S401
S461
Q151
Q152
Q153
Q154
Q50
Q51
Q171
Q271
D501
D601
D602
U101
U102
U151
U153
U201
U202
U285
U301
U302
U305
U401
U402
U485
U501
U502
C1
C2
C3
C50
C61
C62
C101
C102
C103
C104
C105
C106
C107
C108
C109
C110
C111
C151
C152
C153
C154
C155
C156
C158
C161
C162
C163
C164
C171
C172
C173
C174
C175
C176
C201
C202
C203
C204
C205
C206
C207
C208
C209
C210
C211
C251
C252
C253
C254
C255
C256
C271
C272
C273
C274
C275
C276
C285
C286
C287
C288
C289
C290
C301
C302
C303
C304
C305
C306
C307
C308
C309
C310
C311
C385
C386
C387
C388
C389
C390
C401
C402
C403
C404
C405
C406
C407
C408
C409
C410
C411
C485
C486
C487
C488
C489
C490
R50
R60
R61
R101
R102
R103
R104
R105
R106
R107
R108
R109
R110
R111
R112
R113
R114
R115
R116
R117
R118
R119
R120
R121
R122
R123
R124
R125
R151
R152
R153
R154
R155
R156
R157
R158
R159
R161
R172
R173
R174
R175
R176
R177
R178
R179
R180
R181
R182
R183
R184
R185
R186
R187
R188
R189
R190
R191
R192
R193
R200
R201
R202
R203
R204
R205
R206
R207
R208
R209
R210
R211
R212
R213
R214
R215
R216
R217
R218
R219
R220
R221
R222
R223
R224
R225
R251
R252
R253
R254
R255
R256
R257
R258
R259
R260
R261
R262
R263
R265
R270
R271
R272
R273
R274
R275
R276
R277
R278
R279
R280
R281
R282
R283
R284
R285
R286
R287
R288
R289
R290
R291
R292
R293
R295
R300
R301
R302
R303
R304
R305
R306
R307
R308
R309
R310
R311
R312
R313
R314
R315
R316
R317
R318
R319
R320
R321
R322
R323
R324
R325
R368
R385
R386
R387
R388
R389
R390
R391
R392
R393
R394
R395
R396
R397
R398
R399
R400
R401
R402
R403
R404
R405
R406
R407
R408
R409
R410
R411
R412
R413
R414
R415
R416
R417
R418
R419
R420
R421
R422
R423
R424
R425
R485
R486
R487
R488
R489
R490
R491
R492
R493
R494
R495
R496
R497
R498
R499
R500
R501
R502
R503
R504
R505
R506
R507
R508
R509
R510
R511
R512
R513
R514
R515
R516
R517
R518
R519
R520
R521
R522
R523
R524
R525
R526
R527
R528
R529
R530
R531
R532
R533
R534
R535
R536
R537
R538
R539
R540
R541
R542
R543
R544
R545
R546
R547
R548
R549
R550
R551
R552
R553
R554
R555
R556
R557
R558
R559
R560
R561
R562
R563
R564
R565
R566
R567
R568
R569
R570
R571
R572
R573
R574
R575
R576
R577
R578
R579
R580
R581
R582
R583
R584
R585
R586
R587
R588
R589
R590
R591
R592
R593
R594
R595
R596
R597
R598
R599
R600
R601
R602
R603
R604
R605
R606
R607
R608
R609
R610
R611
R612
R613
R614
R615
R616
R617
R618
R619
R620
R621
R622
R623
R624
R625
R626
R627
R628
R629
R630
R631
R632
R633
R634
R635
R636
R637
R638
R639
R640
R641
R642
R643
R644
R645
R646
R647
R648
R649
R650
R651
R652
R653
R654
R655
R656
R657
R658
R659
R660
R661
R662
R663
R664
R665
R666
R667
R668
R669
R670
R671
R672
R673
R674
R675
R676
R677
R678
R679
R680
R681
R682
R683
R684
R685
R686
R687
R688
R689
R690
R691
R692
R693
R694
R695
R696
R697
R698
R699
R700
R701
R702
R703
R704
R705
R706
R707
R708
R709
R710
R711
R712
R713
R714
R715
R716
R717
R718
R719
R720
R721
R722
R723
R724
R725
R726
R727
R728
R729
R730
R731
R732
R733
R734
R735
R736
R737
R738
R739
R740
R741
R742
R743
R744
R745
R746
R747
R748
R749
R750
R751
R752
R753
R754
R755
R756
R757
R758
R759
R760
R761
R762
R763
R764
R765
R766
R767
R768
R769
R770
R771
R772
R773
R774
R775
R776
R777
R778
R779
R780
R781
R782
R783
R784
R785
R786
R787
R788
R789
R790
R791
R792
R793
R794
R795
R796
R797
R798
R799
R800
R801
R802
R803
R804
R805
R806
R807
R808
R809
R810
R811
R812
R813
R814
R815
R816
R817
R818
R819
R820
R821
R822
R823
R824
R825
R826
R827
R828
R829
R830
R831
R832
R833
R834
R835
R836
R837
R838
R839
R840
R841
R842
R843
R844
R845
R846
R847
R848
R849
R850
R851
R852
R853
R854
R855
R856
R857
R858
R859
R860
R861
R862
R863
R864
R865
R866
R867
R868
R869
R870
R871
R872
R873
R874
R875
R876
R877
R878
R879
R880
R881
R882
R883
R884
R885
R886
R887
R888
R889
R890
R891
R892
R893
R894
R895
R896
R897
R898
R899
R900
R901
R902
R903
R904
R905
R906
R907
R908
R909
R910
R911
R912
R913
R914
R915
R916
R917
R918
R919
R920
R921
R922
R923
R924
R925
R926
R927
R928
R929
R930
R931
R932
R933
R934
R935
R936
R937
R938
R939
R940
R941
R942
R943
R944
R945
R946
R947
R948
R949
R950
R951
R952
W001
W002
W003
W004
W005
W006
W007
W008
W009
W010
W011
W012
W013
W014
W015
W016
W017
W018
W019
W020
W021
W022
W023
W024
W025
W026
W027
W028
W029
W030
W031
W032
W033
W034
W035
W036
W037
W038
W039
W040
W041
W042
W043
W044
W045
W046
W047
W048
W049
W050
W051
W052
W053
W054
W055
W056
W057
W058
W059
W060
W061
W062
W063
W064
W065
W066
W067
W068
W069
W070
W071
W072
W073
W074
W075
W076
W077
W078
W079
W080
W081
W082
W083
W084
W085
W086
W087
W088
W089
W090
W091
W092
W093
W094
W095
W096
W097
W098
W099
W100
W101
W102
W103
W104
W105
W106
W107
W108
W109
W110
W111
W112
W113
W114
W115
W116
W117
W118
W119
W120
W121
W122
W123
W124
W125
W126
W127
W128
W129
W130
W131
W132
W133
W134
W135
W136
W137
W138
W139
W140
W141
W142
W143
W144
W145
W146
W147
W148
W149
W150
W151
W152
W153
W154
W155
W156
W157
W158
W159
W160
W161
W162
W163
W164
W165
W166
W167
W168
W169
W170
W171
W172
W173
W174
W175
W176
W177
W178
W179
W180
A
B

BOTTOM PCB

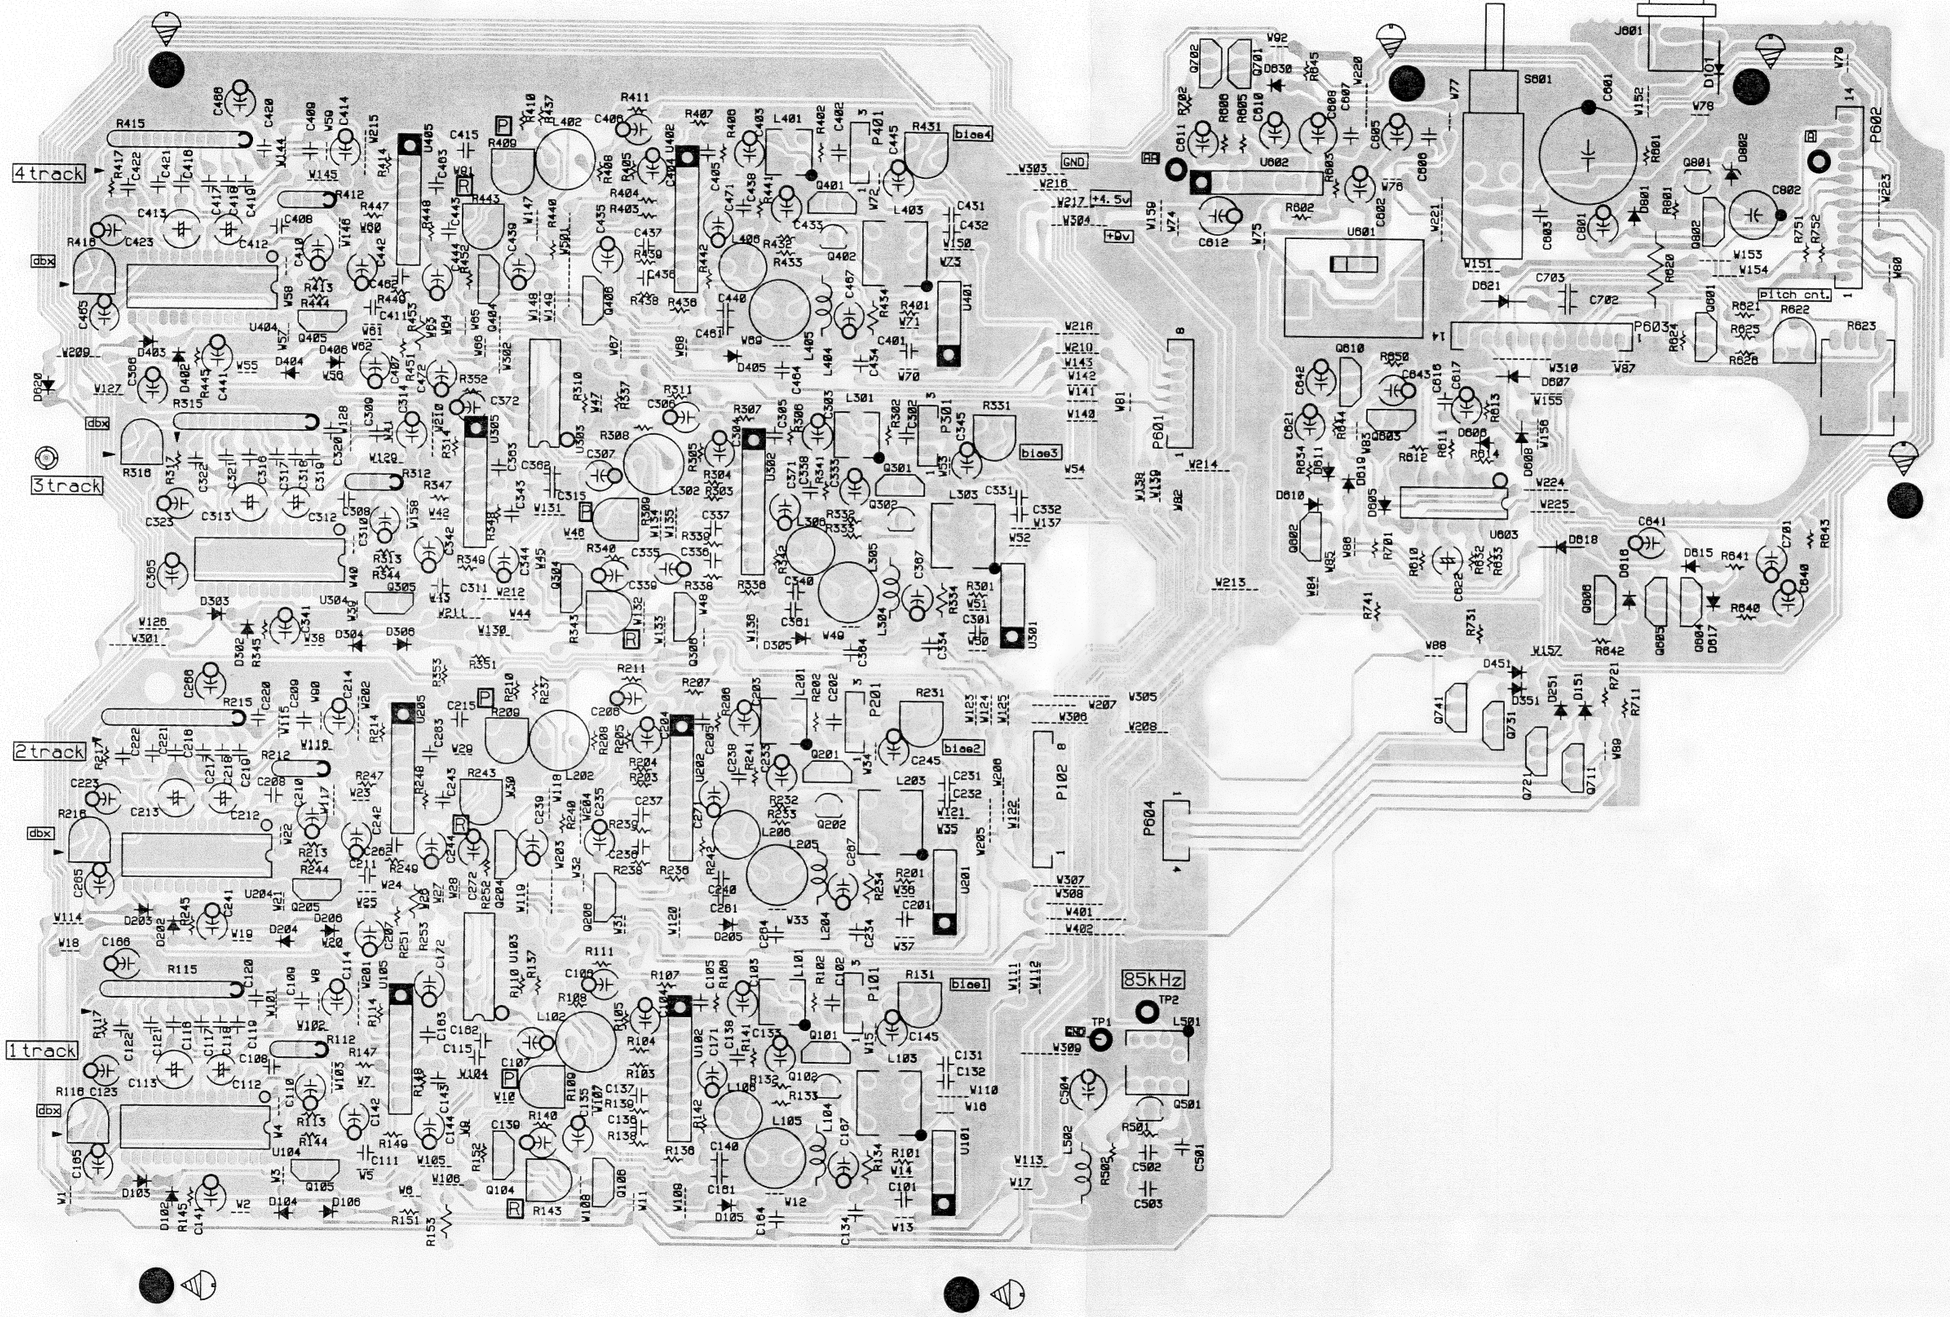
4track
3track
2track
1track
dbx
bias4
bias3
bias2
bias1
GND
+4.5v
+9v
pitch cnt.
85kHz
TP1
TP2

MIXER PCB ASSY

REF. NO.	PARTS NO.	DESCRIPTION
	*9145200100	MIXER PCB ASSY
	*9155200100	MIXER PCB
	*9107091600	14P MIXER WIRES
	*9107091700	8P MIXER WIRES
D60	9174021520	LED, L-934IT (RED)
D185-485	9174021520	LED, L-934IT (RED)
D186-486	9174021520	LED, L-934IT (RED)
D187-487	9174021520	LED, L-934IT (RED)
D188-488	9174021620	LED, L-934YC (YELLOW)
D189-489	9174021620	LED, L-934YC (YELLOW)
D190-490	9174021520	LED, L-934IT (RED)
D501	9174021520	LED, L-934IT (RED)
D601, 602	9165022150	D, TP 1SS133T
J101	9143917000	JACK, 064-3 (BLK)
J151-153	9143387000	JACK, 2P YKC21-3063 (BLK)
J154	9143919000	JACK, 064-0-2 (RED)
J155, 156	9143916000	JACK, 064-2 (BLK)
J157	9143916000	JACK, 064-2 (BLK)
J158	9144333000	JACK, RCA YKC-21-3048
J201-401	9143917000	JACK, 064-3 (BLK)
J501	9143491000	JACK, 064 (BLK)
J701	9143918000	JACK, 064-4 (BLK)
P101, 102	9144034001	CN, TUC-P5P-B1
P201	9144034001	CN, TUC-P5P-B1
P202	9144033001	CN, TUC-P4P-B1
P301	9144034001	CN, TUC-P5P-B1
P302	9144033001	CN, TUC-P4P-B1
P501	9144035001	CN, TUC-P6P-B1
P502	9144041001	CONNECTOR PLUG, 12P
Q50	9163011220	TR, DTA 124ES TP
Q51	9163310420	TR, DTC 124ES TP
Q151-154	9163450020	TR, DTC314TS
Q171, 271	9163450020	TR, DTC314TS
R50	⚠ 9114433060	R, NONFLMMABLE 1W 15
R105-405	9172031900	VR, RS20111P9009TK-10KRD
R107-407	9172032600	VR, RS45111 P6022 10KA TK
R111-411	9172030500	VR, EVUF3AF30B15100KB
R114-414	9172030500	VR, EVUF3AF30B15100KB
R118-418	9172030400	VR, EVUF1AF30B14 10KB
R121-421	9172030300	VR, EVU F0A F30 A14 10KA
R123-423	9172030300	VR, EVU F0A F30 A14 10KA
R152	9172032700	VR, RS60112 P6026 10KAX2
R172	9172030700	VR, EVJY00F30A14 10KAX2
R501	9172030700	VR, EVJY00F30A14 10KAX2
R701	9172030700	VR, EVJY00F30A14 10KAX2
S101	9135037000	SLIDE SW, SSSH013NB2
S102	9135036300	SLIDE SW, SSSU042NA2-TK
S152-154	9135037300	SW, PS009-PA022BAT-PA 5.5
S161	9135035200	SLIDE SW, SSSU023NB2-TK
S162	9135037000	SLIDE SW, SSSH013NB2

MIXER PCB ASSY

REF. NO.	PARTS NO.	DESCRIPTION
S163	9135037400	SLIDE SW, SSSU022-S09N1
S201	9135037000	SLIDE SW, SSSH013NB2
S261	9135035200	SLIDE SW, SSSU023NB2-TK
S301	9135037000	SLIDE SW, SSSH013NB2
S361	9135035200	SLIDE SW, SSSU023NB2-TK
S401	9135037000	SLIDE SW, SSSH013NB2
S461	9135035200	SLIDE SW, SSSU023NB2-TK
U101, 301	9167015910	IC, NJM2068SD
U102-402	9167015800	IC, NJM4565L
U151, 251	9167015800	IC, NJM4565L
U152	9167015800	IC, NJM4565L
U153	9167022300	IC, LA6515
U185-485	9167017000	IC, LB1423N

BOTTOM PCB ASSY

REF. NO.	PARTS NO.	DESCRIPTION
	*9145201103	BOTTOM PCB ASSY
	*9155201100	BOTTOM PCB
	*9783603008	SCREW, BTT-P M3X8
C601	⚠ 9117303600	C, ELEC 4700UF 25V
D101	9165024350	D, RB-100A
D102-402	9165022150	D, TP 1SS133T
D103-403	9165022150	D, TP 1SS133T
D104-404	9165022150	D, TP 1SS133T
D105-405	9165022150	D, TP 1SS133T
D106-406	9165022150	D, TP 1SS133T
D151-451	9165022150	D, TP 1SS133T
D605-608	9165022150	D, TP 1SS133T
D610, 611	9165022150	D, TP 1SS133T
D615-621	9165022150	D, TP 1SS133T
D630	9165022150	D, TP 1SS133T
D801	9165022150	D, TP 1SS133T
D802	9166054251	D, ZENER MTZ J 11B
J601	9144357000	JACK, DC POWER DJ-0702N
L101-401	9173009300	COIL, TRAP 85KHZ
L102-402	9173009400	COIL, L. P. F. 85KHZ
L103-403	9173010800	COIL, SLAVE
L104-404	9173010600	COIL, 10UHJ
L105-405	9173009400	COIL, L. P. F. 85KHZ
L106-406	9173008700	COIL, 36MH
L501	9173010700	COIL, MASTER OSC
L502	9173006350	COIL, 220MH EC35-221K
P101	9143171000	PLUG, CONNECTOR B3B-EH 3P
P102	9143176000	PLUG, 8P B8B-EH-K
P201	9143171020	PLUG, CONNECTOR B3B-EH-A B
P301	9143171010	PLUG, CONNECTOR B3B-EH-A R

BOTTOM PCB ASSY

REF. NO.	PARTS NO.	DESCRIPTION
P401	9143171040	PLUG, CONNECTOR 3P
P601	9143236000	PLUG, 8P B8B-PH
P602	9143242000	PLUG, 14P B14B-PH-K
P603	9143242020	PLUG, 14P B14B-PN-K
P604	9143232000	PLUG, B4B-PH 4P
Q101-401	9163014220	TR, DTC363ES TP
Q102-402	9163450300	TR, 2SC2002L
Q104-404	9163450020	TR, DTC314TS
Q105-405	9163450020	TR, DTC314TS
Q106-406	9163011220	TR, DTA 124ES TP
Q501	9163450520	TR, 2SC2603-T11-F
Q601	9164004620	FET, 2SK381-T11-D
Q602	9163011220	TR, DTA 124ES TP
Q603	9163310420	TR, DTC 124ES TP
Q604	9163011220	TR, DTA 124ES TP
Q605	9163310420	TR, DTC 124ES TP
Q606	9163015520	TR DTD 123TS
Q610	9163310420	TR, DTC 124ES TP
Q701	9163310420	TR, DTC 124ES TP
Q702	9163011220	TR, DTA 124ES TP
Q711-741	9163202620	TR, DTB143ES TP
Q801	9163309420	TR, 2SC1815GR (TP)
Q802	9163011220	TR, DTA 124ES TP
R109-409	9112059810	VR, 10K TB067A
R112-412	9111255000	R, ARRAY EXBZ5L045G DBX
R115-415	9111256000	R, ARRAY EXBZ13L046G DBX
R116-416	9112056010	VR, 4.7K TB067A
R131-431	9112059510	VR, 200K TB067A
R143-443	9112059810	VR, 10K TB067A
R620	⚠ 9114725005	R, NONFLAMMABLE 2W 10
R622	9112058010	VR, 1K TB067A
R623	9172024100	VR, RK11K113A229-1.5KB TK
S601	⚠ 9135032101	PUSH SW, SPUN19C606-TK
U101-401	9167017200	IC, BA7755
U102-402	9167015910	IC, NJM2068SD
U103, 303	9167009800	IC, TC4066BP
U104-404	9167026100	IC, AN7367K
U105-405	9167015800	IC, NJM4565L
U601	9167025600	IC, NJM317F
U601	9260259000	HEAT SINK, CS-B2202-02317
U602	9167015010	IC, M5218L
U603	9167026900	IC, TC4069UBP

JUMP A PCB ASSY

REF. NO.	PARTS NO.	DESCRIPTION
	*9145200200	JUMP A PCB ASSY
	*9155200200	JUMP A PCB
	*9107091800	4P JUMP WIRES
J1-J3	9144132001	CONNECTOR, TUC-P5X-B1
J4	9144133001	CONNECTOR, TUC-P6X-B1

JUMP B PCB ASSY

REF. NO.	PARTS NO.	DESCRIPTION
	*9145200300	JUMP B PCB ASSY
	*9155200300	JUMP B PCB
J11	9144132001	CONNECTOR, TUC-P5X-B1
J21	9144131001	CONNECTOR, TUC-P4X-B1
J31	9144131001	CONNECTOR, TUC-P4X-B1
J51	9144139001	CONNECTOR PLUG, 12P

6. BLOCK DIAGRAM
ブロック・ダイアグラム

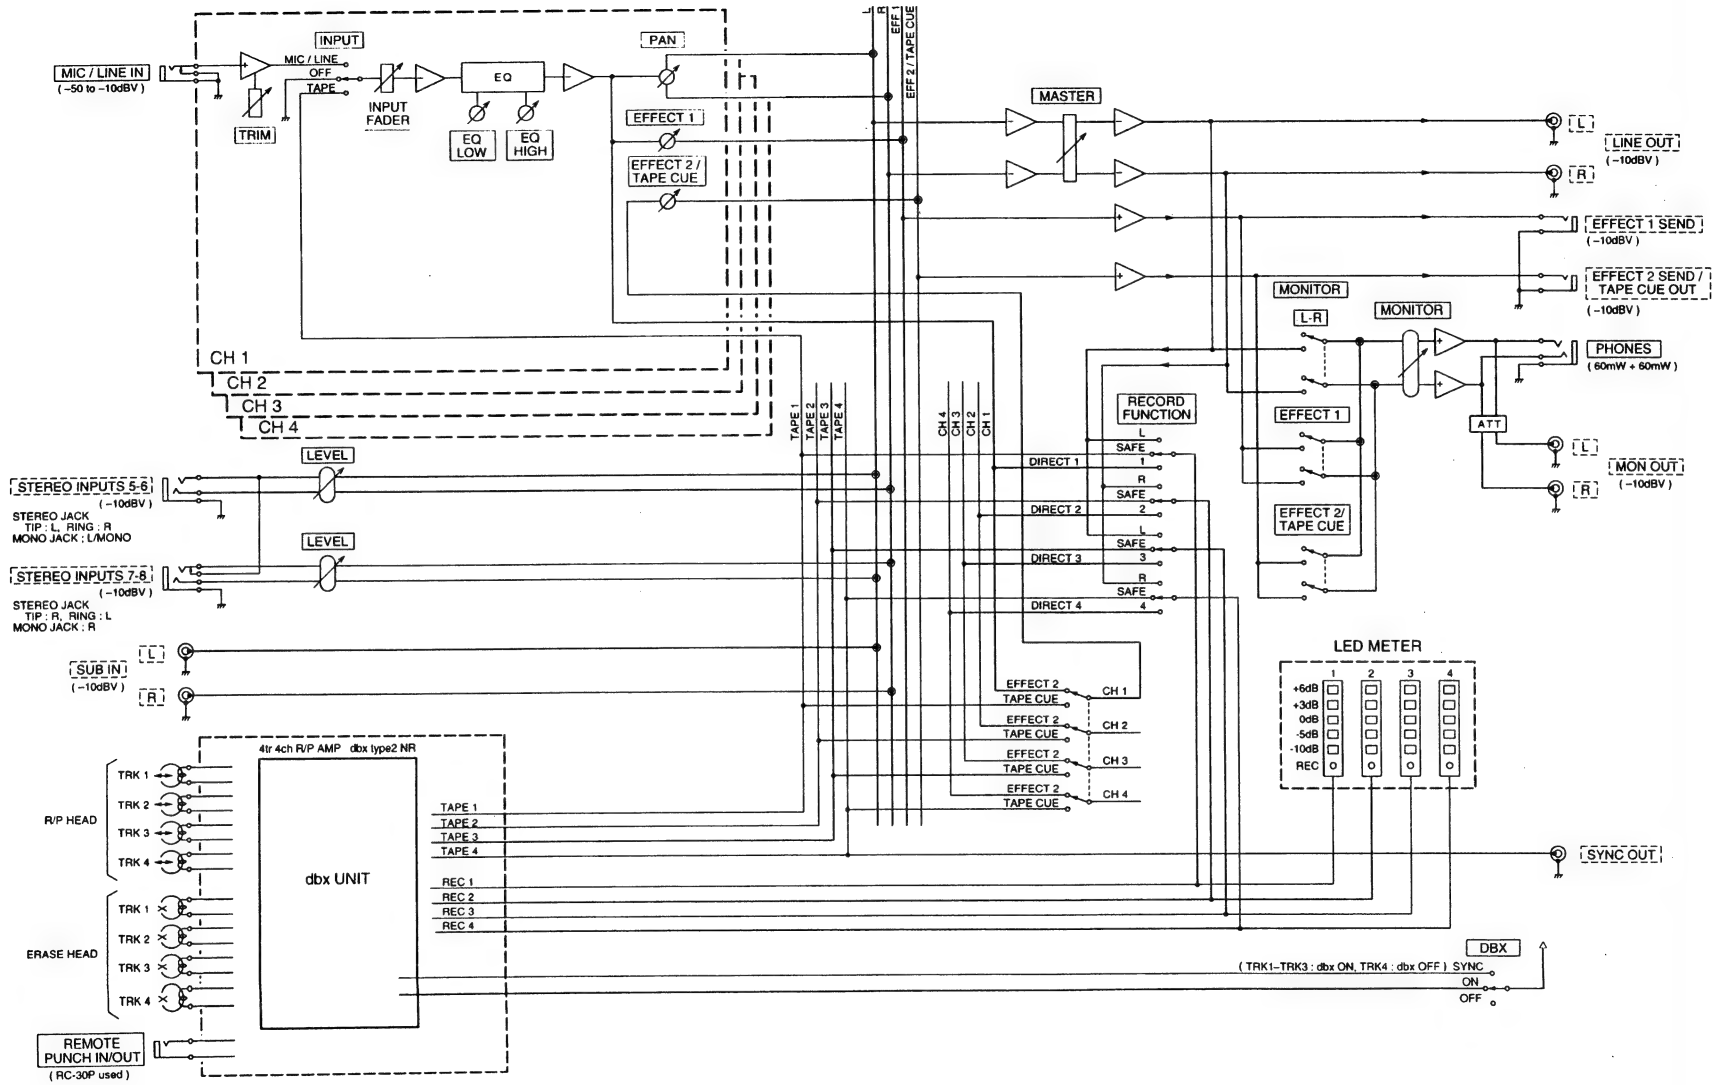

7. LEVEL DIAGRAM
レベル・ダイアグラム

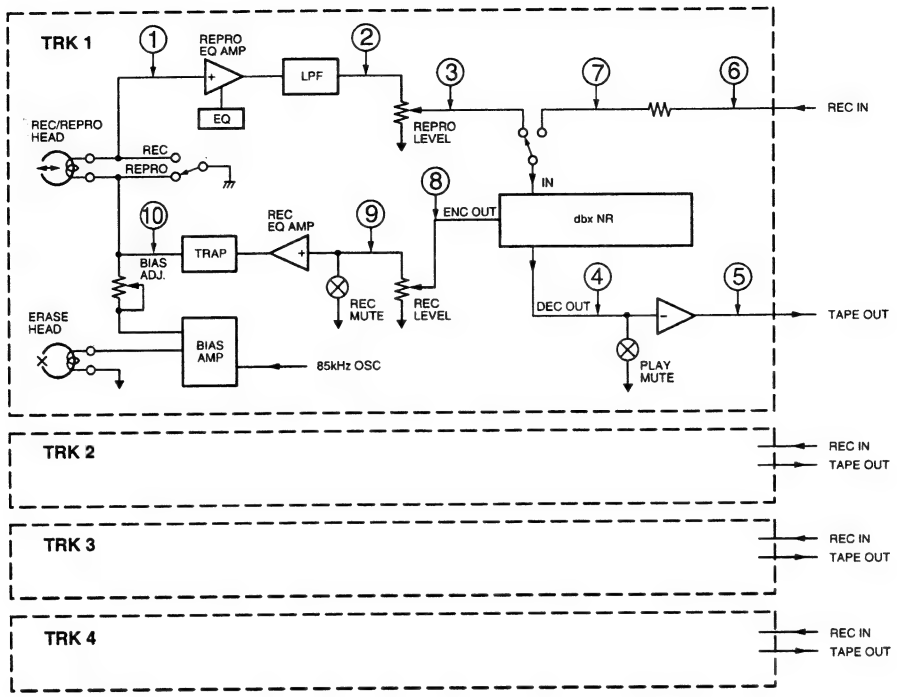

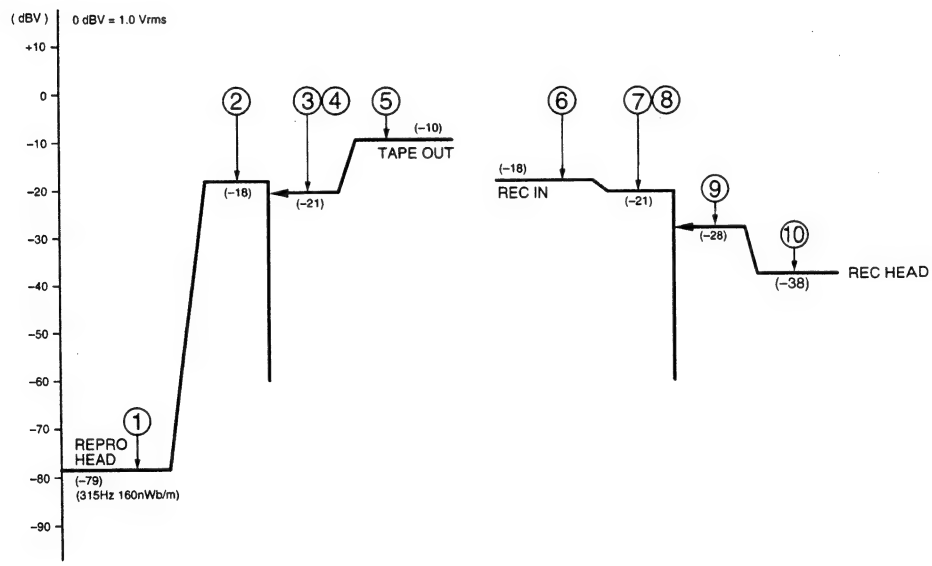

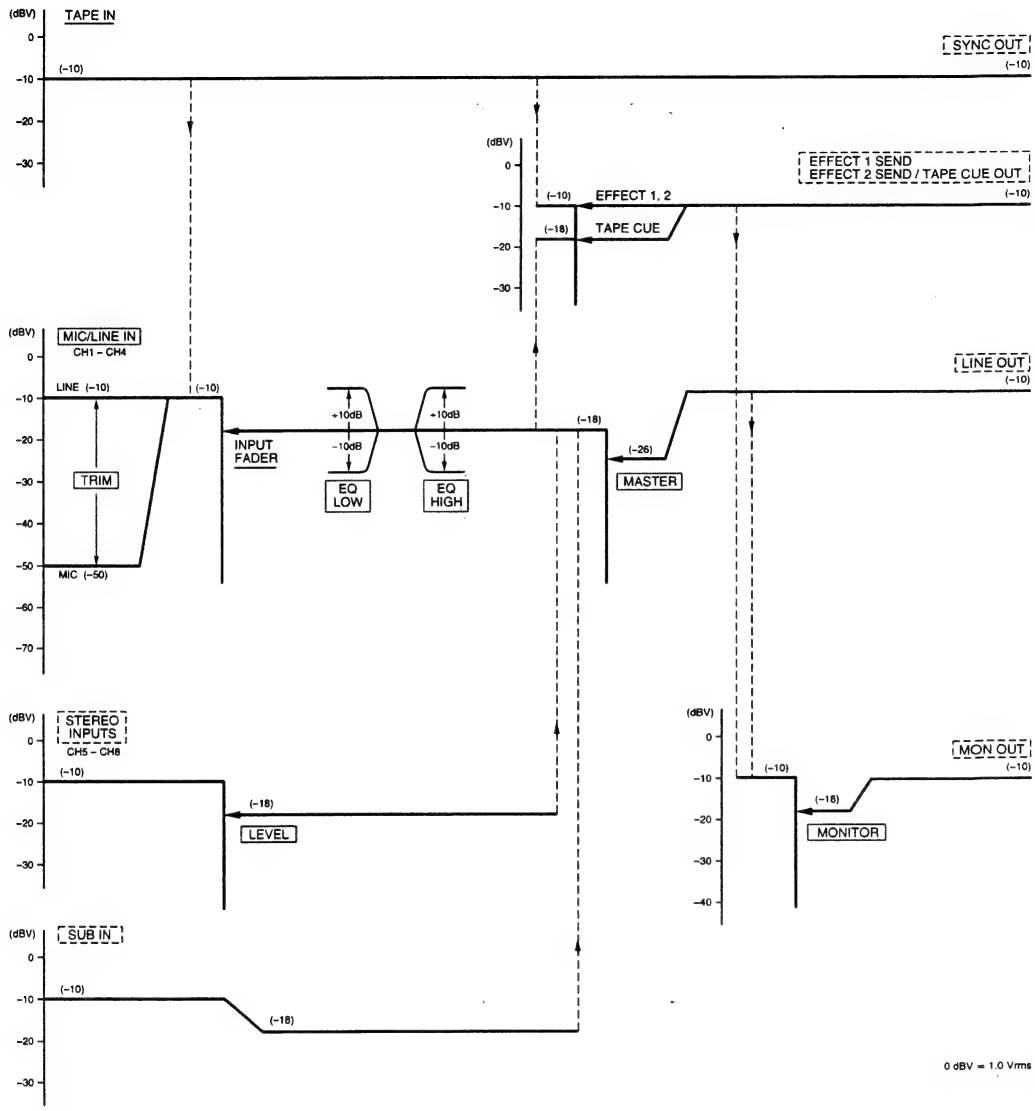
(dBV)
TAPE IN
SYNC OUT
(–10)
EFFECT 1 SEND
EFFECT 2 SEND / TAPE CUE OUT
EFFECT 1, 2
TAPE CUE
(–18)
MIC/LINE IN
CH1 – CH4
LINE (–10)
TRIM
MIC (–50)
INPUT FADER
+10dB
–10dB
EQ LOW
EQ HIGH
MASTER
(–26)
LINE OUT
STEREO INPUTS
CH5 – CH8
LEVEL
MON OUT
MONITOR
SUB IN
0 dBV = 1.0 Vrms

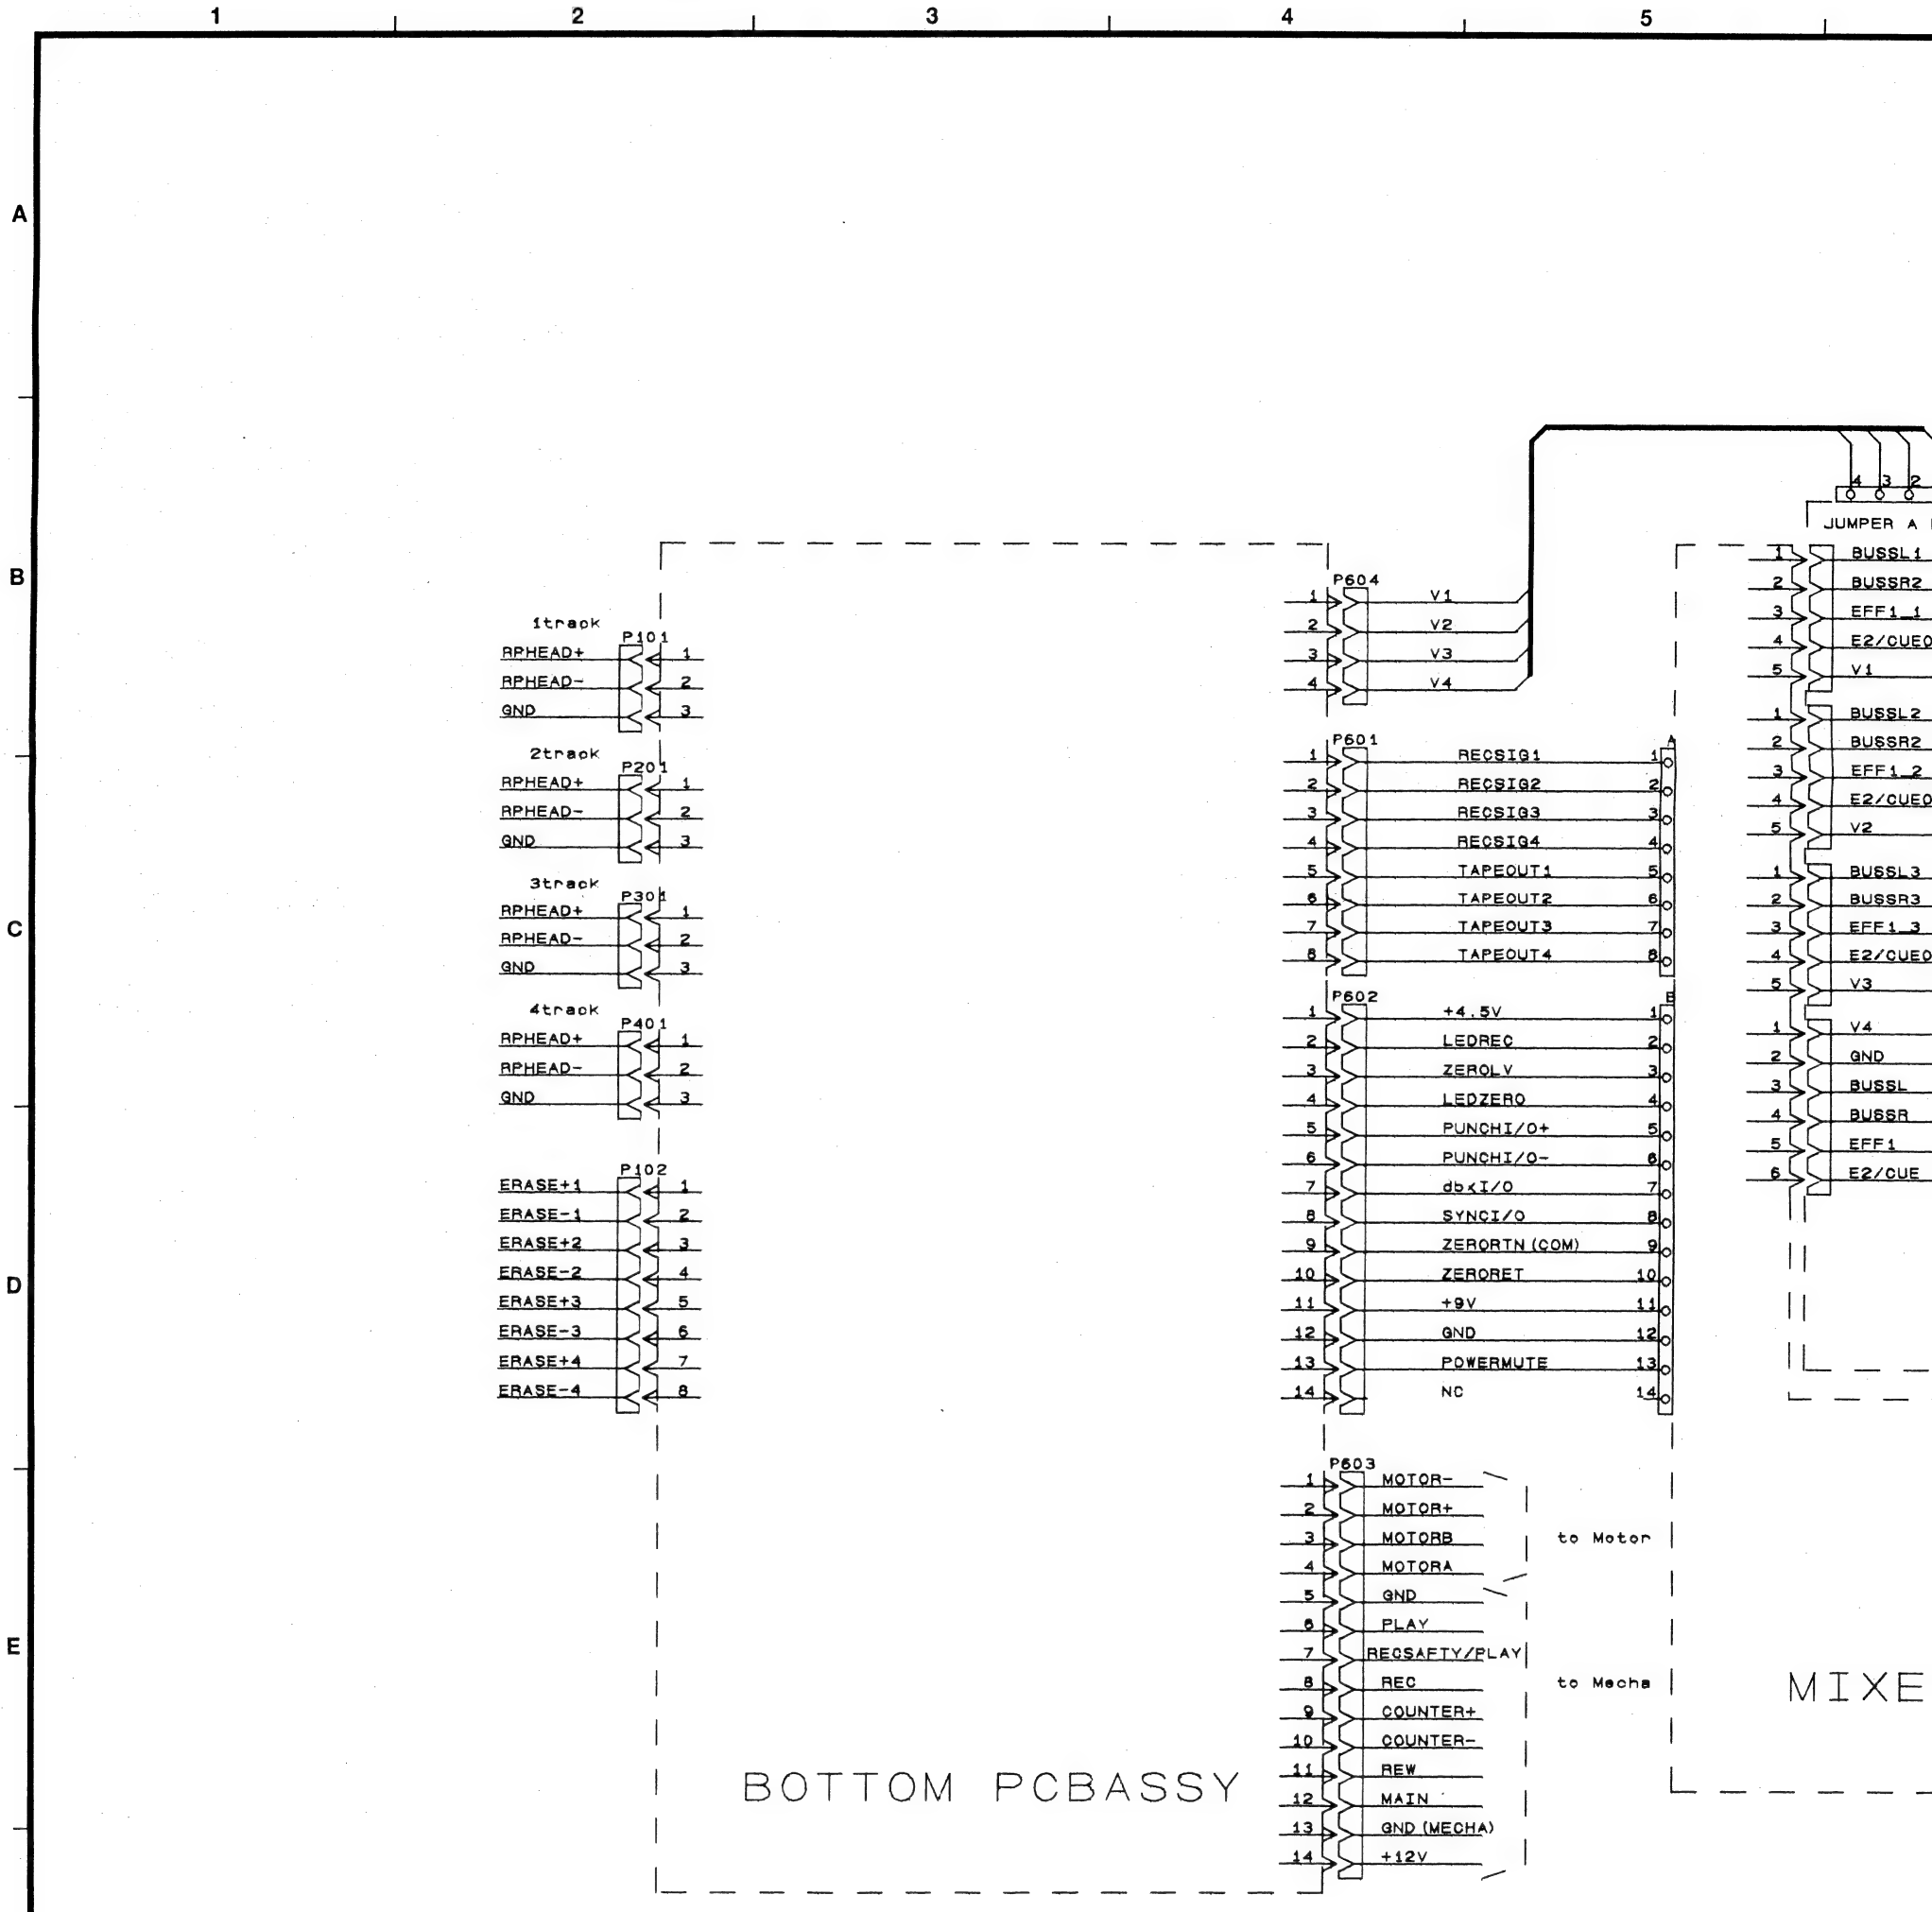
1track
P101
RPHEAD+
RPHEAD-
GND
2track
P201
RPHEAD+
RPHEAD-
GND
3track
P301
RPHEAD+
RPHEAD-
GND
4track
P401
RPHEAD+
RPHEAD-
GND
P102
ERASE+1
ERASE-1
ERASE+2
ERASE-2
ERASE+3
ERASE-3
ERASE+4
ERASE-4
P604
V1
V2
V3
V4
P601
RECSIG1
RECSIG2
RECSIG3
RECSIG4
TAPEOUT1
TAPEOUT2
TAPEOUT3
TAPEOUT4
P602
+4.5V
LEDREC
ZEROLV
LEDZERO
PUNCHI/O+
PUNCHI/O-
dbxI/O
SYNCI/O
ZERORTN (COM)
ZERORET
+9V
GND
POWERMUTE
NC
P603
MOTOR-
MOTOR+
MOTORB
MOTORA
GND
PLAY
REGSAFTY/PLAY
REC
COUNTER+
COUNTER-
REW
MAIN
GND (MECHA)
+12V
to Motor
to Mecha
BOTTOM PCBASSY
JUMPER A
BUSSL1
BUSSR2
EFF1_1
E2/CUEO
V1
BUSSL2
BUSSR2
EFF1_2
E2/CUEO
V2
BUSSL3
BUSSR3
EFF1_3
E2/CUEO
V3
V4
GND
BUSSL
BUSSR
EFF1
E2/CUE
MIXE

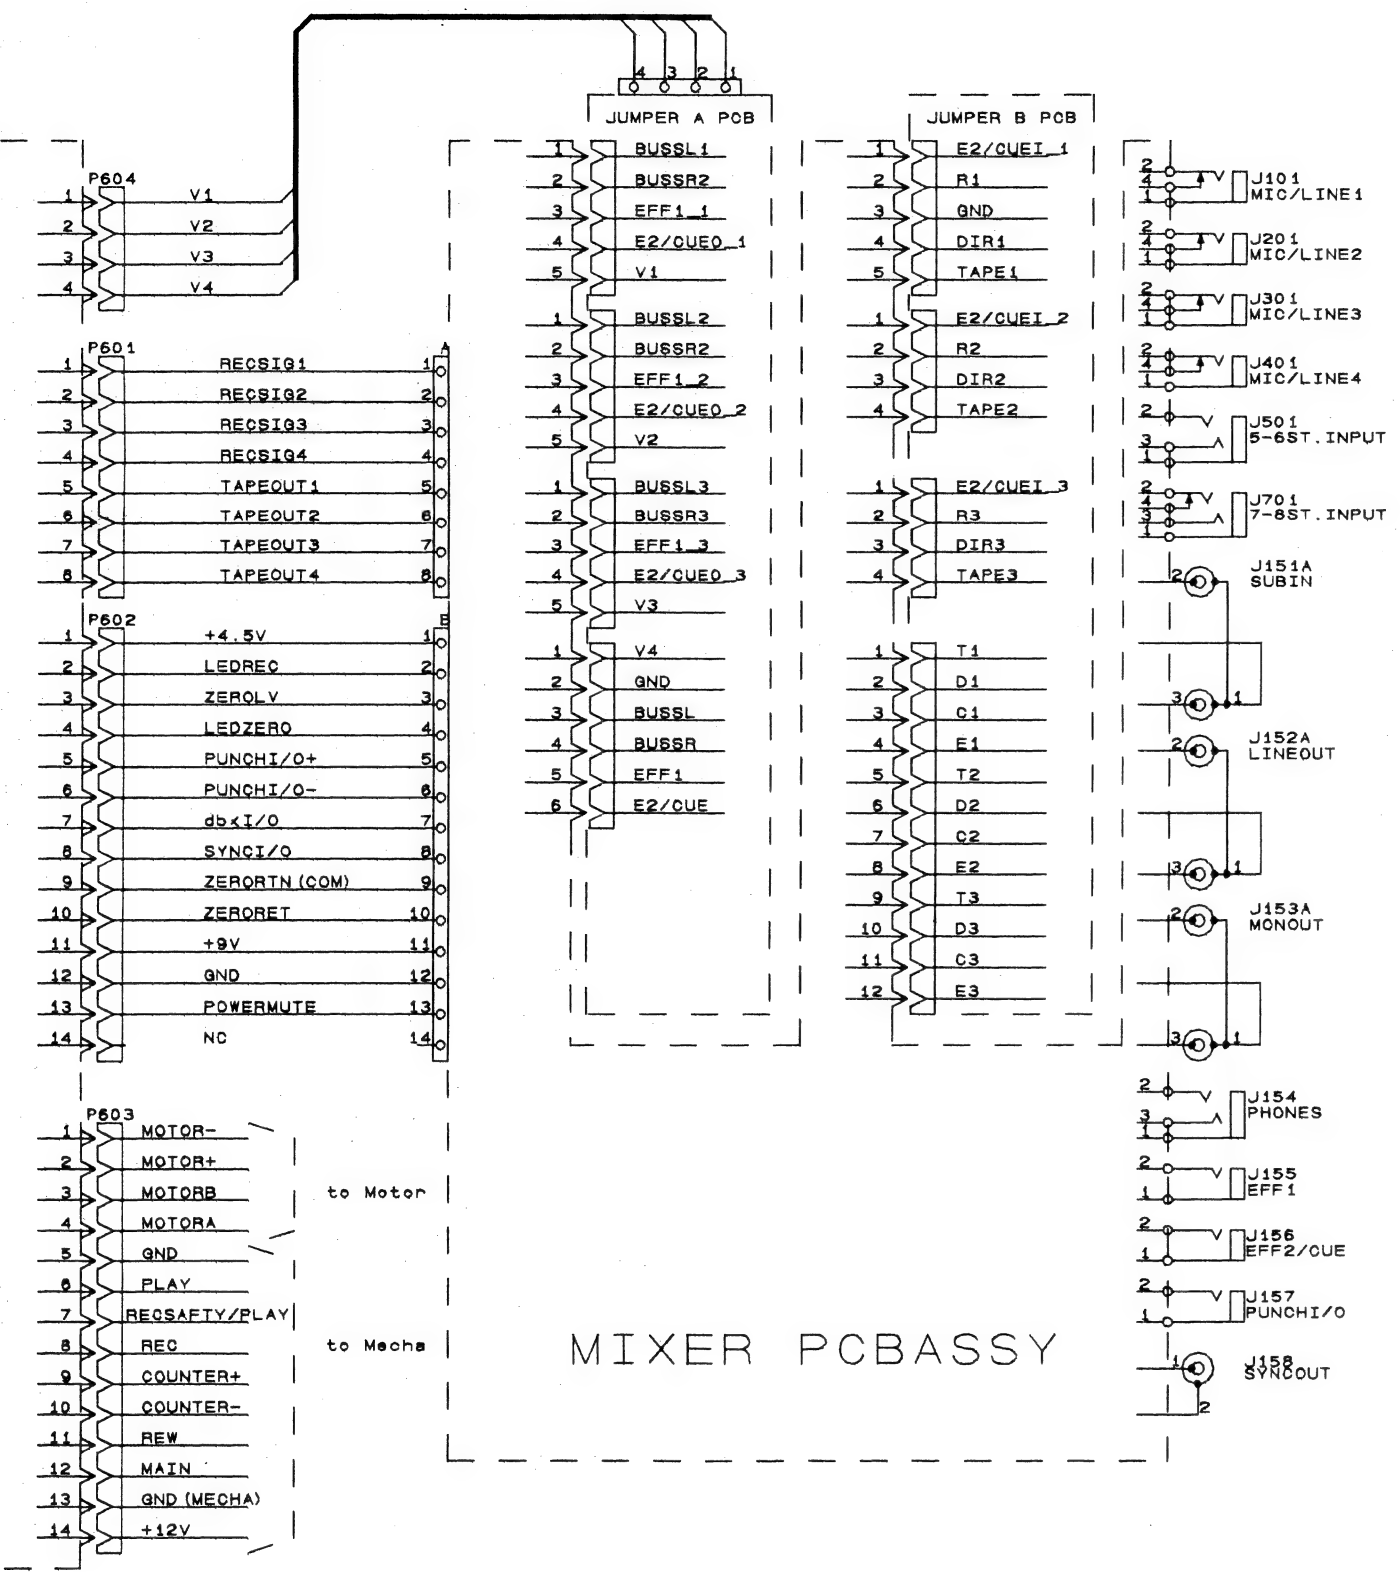
JUMPER A PCB
JUMPER B PCB
P604
V1
V2
V3
V4
P601
RECSIG1
RECSIG2
RECSIG3
RECSIG4
TAPEOUT1
TAPEOUT2
TAPEOUT3
TAPEOUT4
P602
+4.5V
LEDREC
ZEROLV
LEDZERO
PUNCHI/O+
PUNCHI/O-
db<I/O
SYNCI/O
ZERORTN (COM)
ZERORET
+9V
GND
POWERMUTE
NC
P603
MOTOR-
MOTOR+
MOTORB
MOTORA
GND
PLAY
RECSAFTY/PLAY
REC
COUNTER+
COUNTER-
REW
MAIN
GND (MECHA)
+12V
to Motor
to Mecha
BUSSL1
BUSSR2
EFF1_1
E2/CUEO_1
V1
BUSSL2
BUSSR2
EFF1_2
E2/CUEO_2
V2
BUSSL3
BUSSR3
EFF1_3
E2/CUEO_3
V3
V4
GND
BUSSL
BUSSR
EFF1
E2/CUE
E2/CUEI_1
R1
GND
DIR1
TAPE1
E2/CUEI_2
R2
DIR2
TAPE2
E2/CUEI_3
R3
DIR3
TAPE3
T1
D1
C1
E1
T2
D2
C2
E2
T3
D3
C3
E3
J101 MIC/LINE1
J201 MIC/LINE2
J301 MIC/LINE3
J401 MIC/LINE4
J501 5-6ST.INPUT
J701 7-8ST.INPUT
J151A SUBIN
J152A LINEOUT
J153A MONOUT
J154 PHONES
J155 EFF1
J156 EFF2/CUE
J157 PUNCHI/O
J158 SYNCOUT
MIXER PCBASSY

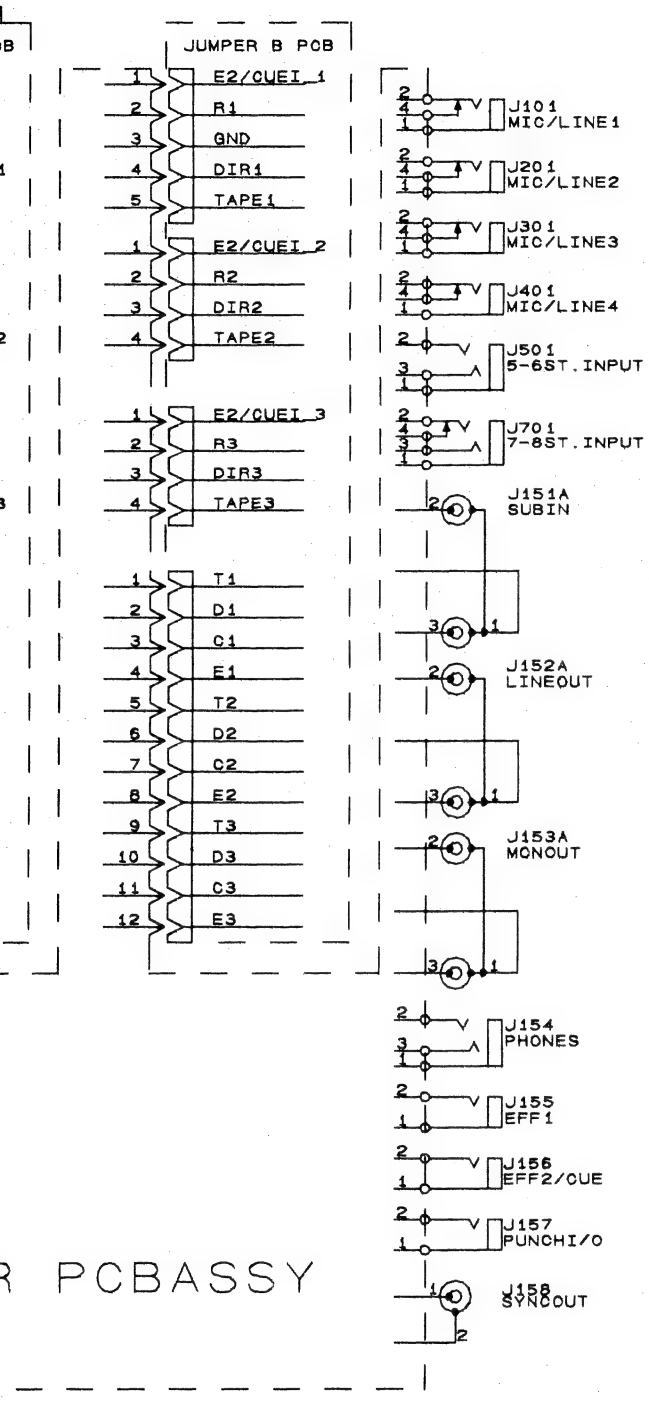
JUMPER B PCB
E2/CUEI 1
R1
GND
DIR1
TAPE1
E2/CUEI 2
R2
DIR2
TAPE2
E2/CUEI 3
R3
DIR3
TAPE3
T1
D1
C1
E1
T2
D2
C2
E2
T3
D3
C3
E3
J101 MIC/LINE1
J201 MIC/LINE2
J301 MIC/LINE3
J401 MIC/LINE4
J501 5-6ST.INPUT
J701 7-8ST.INPUT
J151A SUBIN
J152A LINEOUT
J153A MONOUT
J154 PHONES
J155 EFF1
J156 EFF2/CUE
J157 PUNCHI/O
J158 SYNCOUT
R PCBASSY

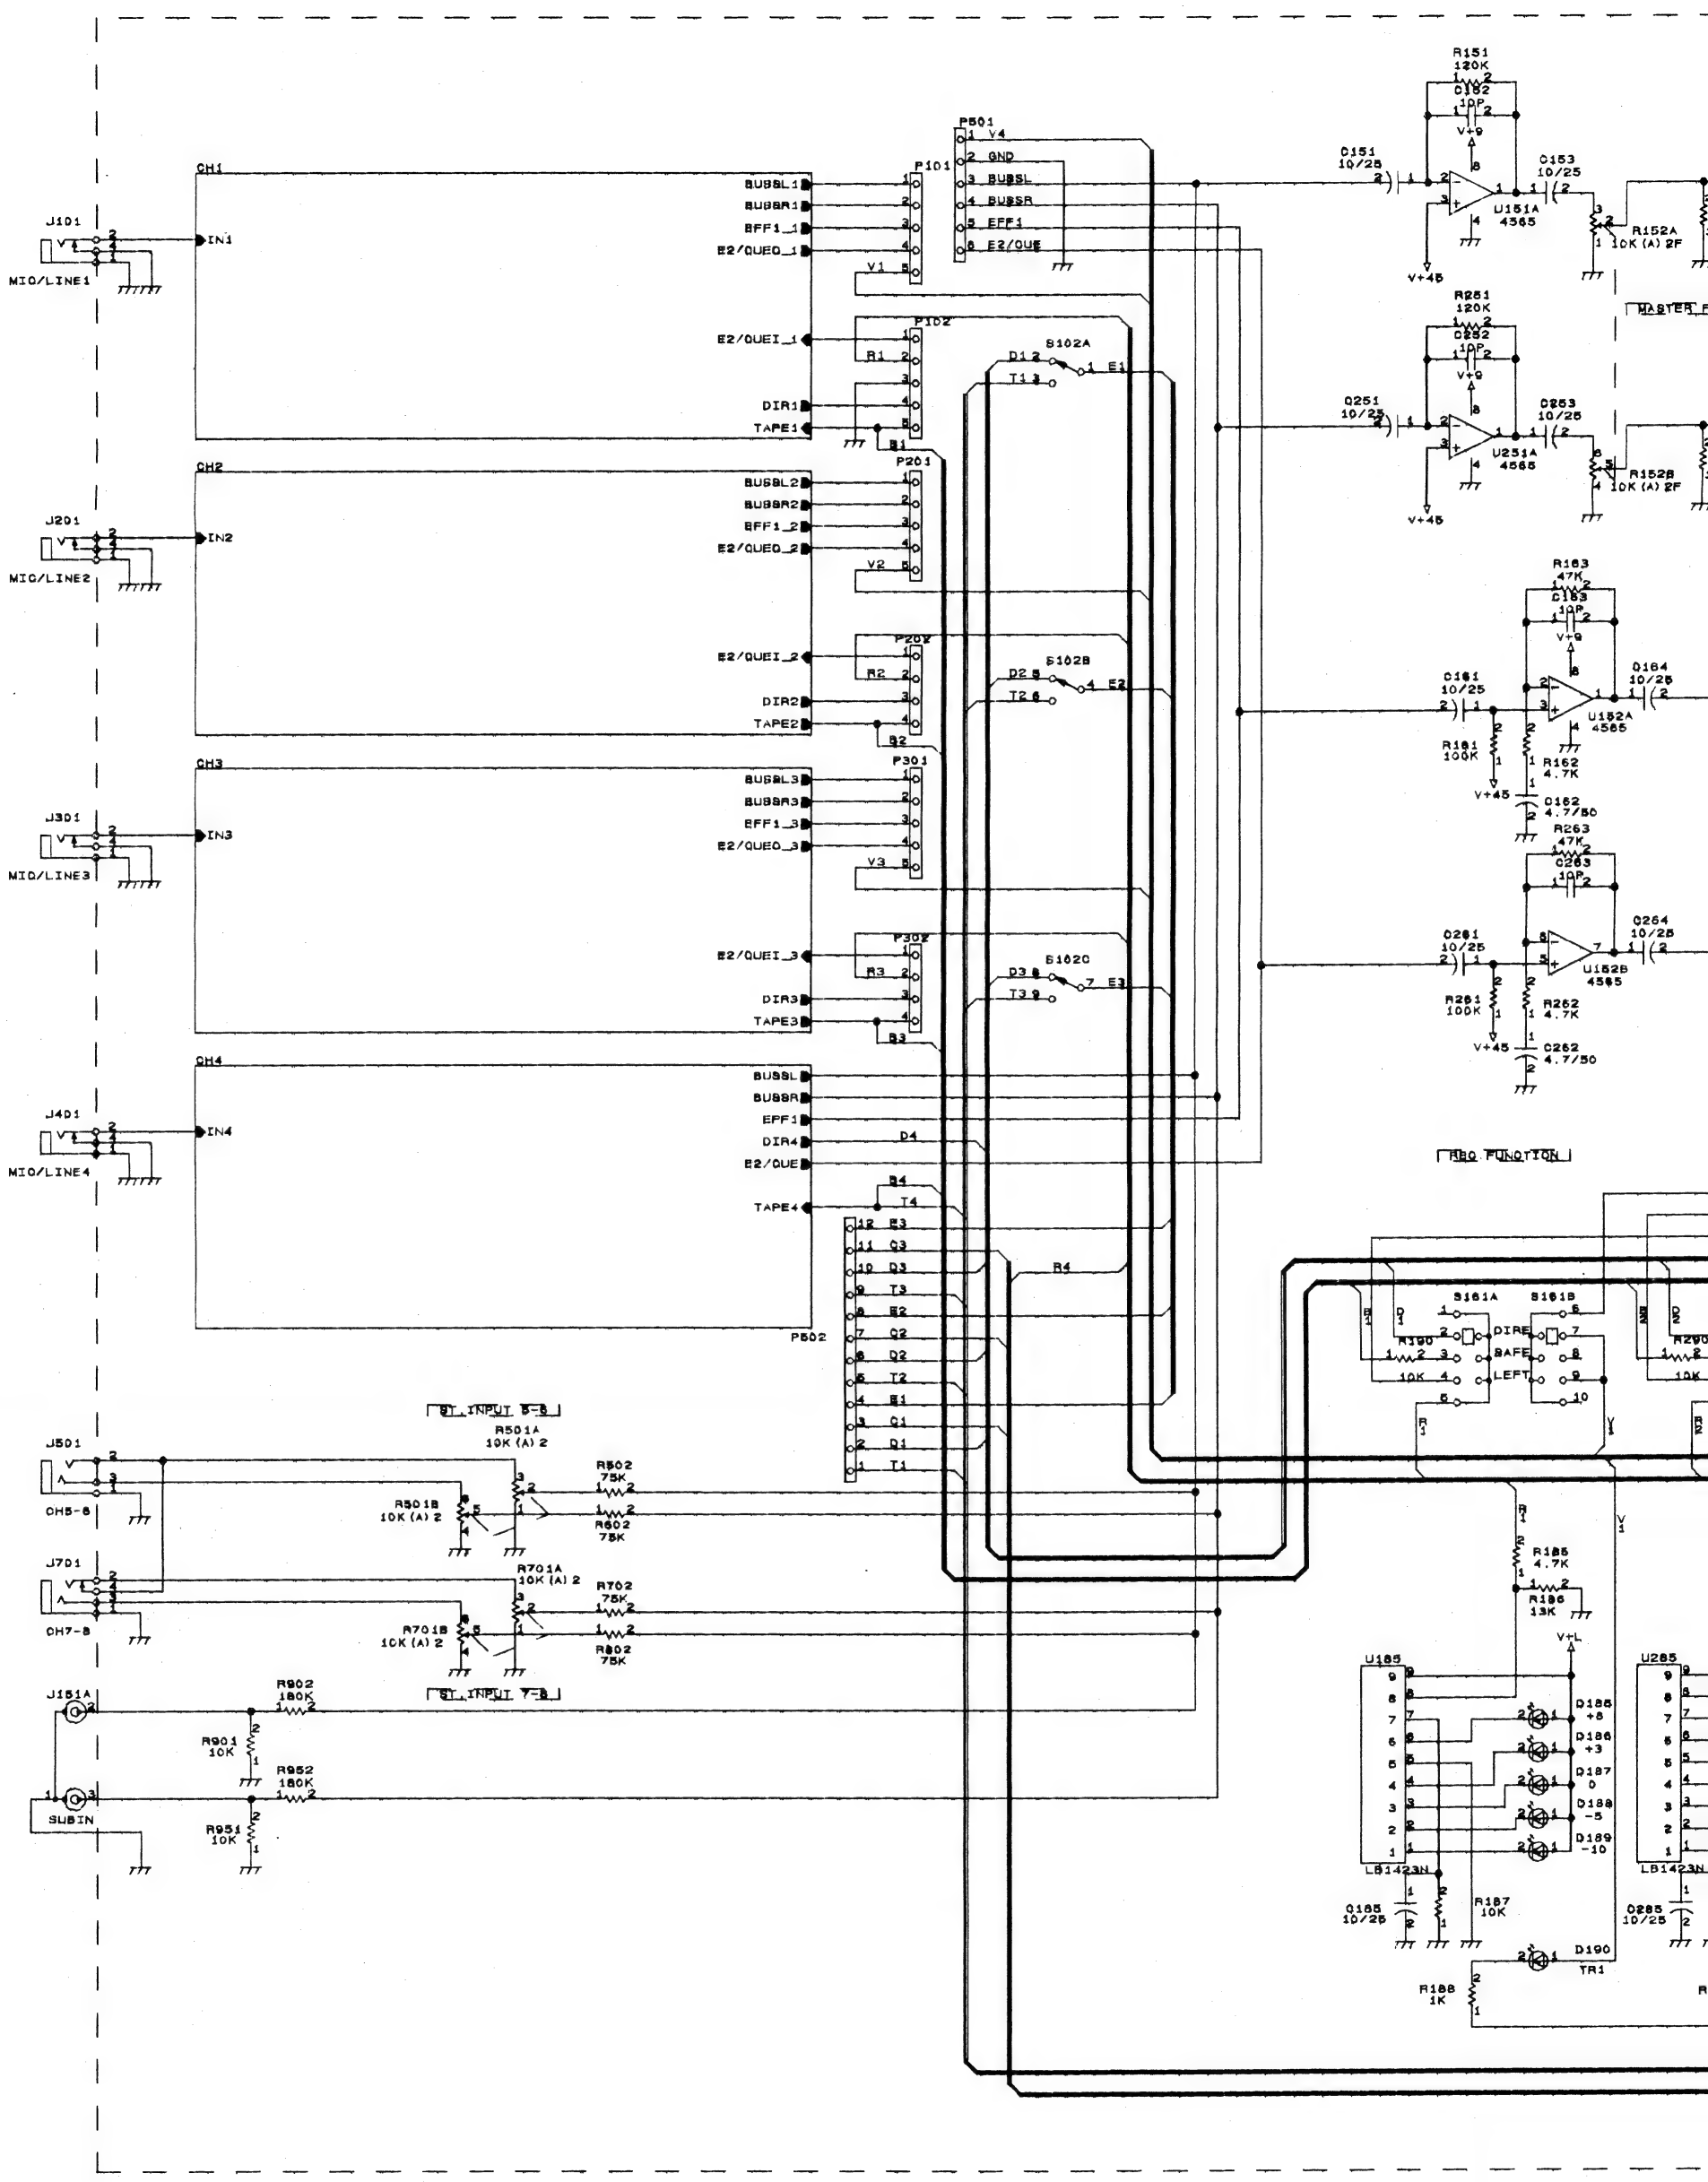
CH1
CH2
CH3
CH4
J101
J201
J301
J401
MIC/LINE1
MIC/LINE2
MIC/LINE3
MIC/LINE4
IN1
IN2
IN3
IN4
P101
P102
P201
P202
P301
P302
P501
P502
BUSSL1
BUSSR1
EFF1_1
E2/QUEO_1
E2/QUEI_1
DIR1
TAPE1
BUSSL2
BUSSR2
EFF1_2
E2/QUEO_2
E2/QUEI_2
DIR2
TAPE2
BUSSL3
BUSSR3
EFF1_3
E2/QUEO_3
E2/QUEI_3
DIR3
TAPE3
BUSSL
BUSSR
EFF1
DIR4
E2/QUE
TAPE4
V4
GND
BUSSL
BUSSR
EFF1
E2/QUE
S102A
S102B
S102C
S161A
S161B
DIRE
SAFE
LEFT
R151
120K
C152
10P
C151
10/25
C153
10/25
U151A
4565
R152A
10K (A) 2F
R251
120K
C252
10P
C251
10/25
C253
10/25
U251A
4565
R152B
10K (A) 2F
MASTER F
R163
47K
C163
10P
C161
10/25
C164
10/25
U152A
4565
R161
100K
R162
4.7K
C162
4.7/50
R263
47K
C263
10P
C261
10/25
C264
10/25
U152B
4565
R261
100K
R262
4.7K
C262
4.7/50
V+9
V+45
REQ FUNCTION
R190
10K
R185
4.7K
R186
13K
U185
U285
LB1423N
D185
+8
D186
+3
D187
0
D188
-5
D189
-10
D190
TR1
R187
10K
R188
1K
C185
10/25
C285
10/25
V+L
ST. INPUT 5-6
ST. INPUT 7-8
R501A
10K (A) 2
R501B
10K (A) 2
R502
75K
R602
75K
R701A
10K (A) 2
R701B
10K (A) 2
R702
75K
R802
75K
J501
J701
CH5-6
CH7-8
J151A
SUBIN
R902
180K
R901
10K
R952
180K
R951
10K

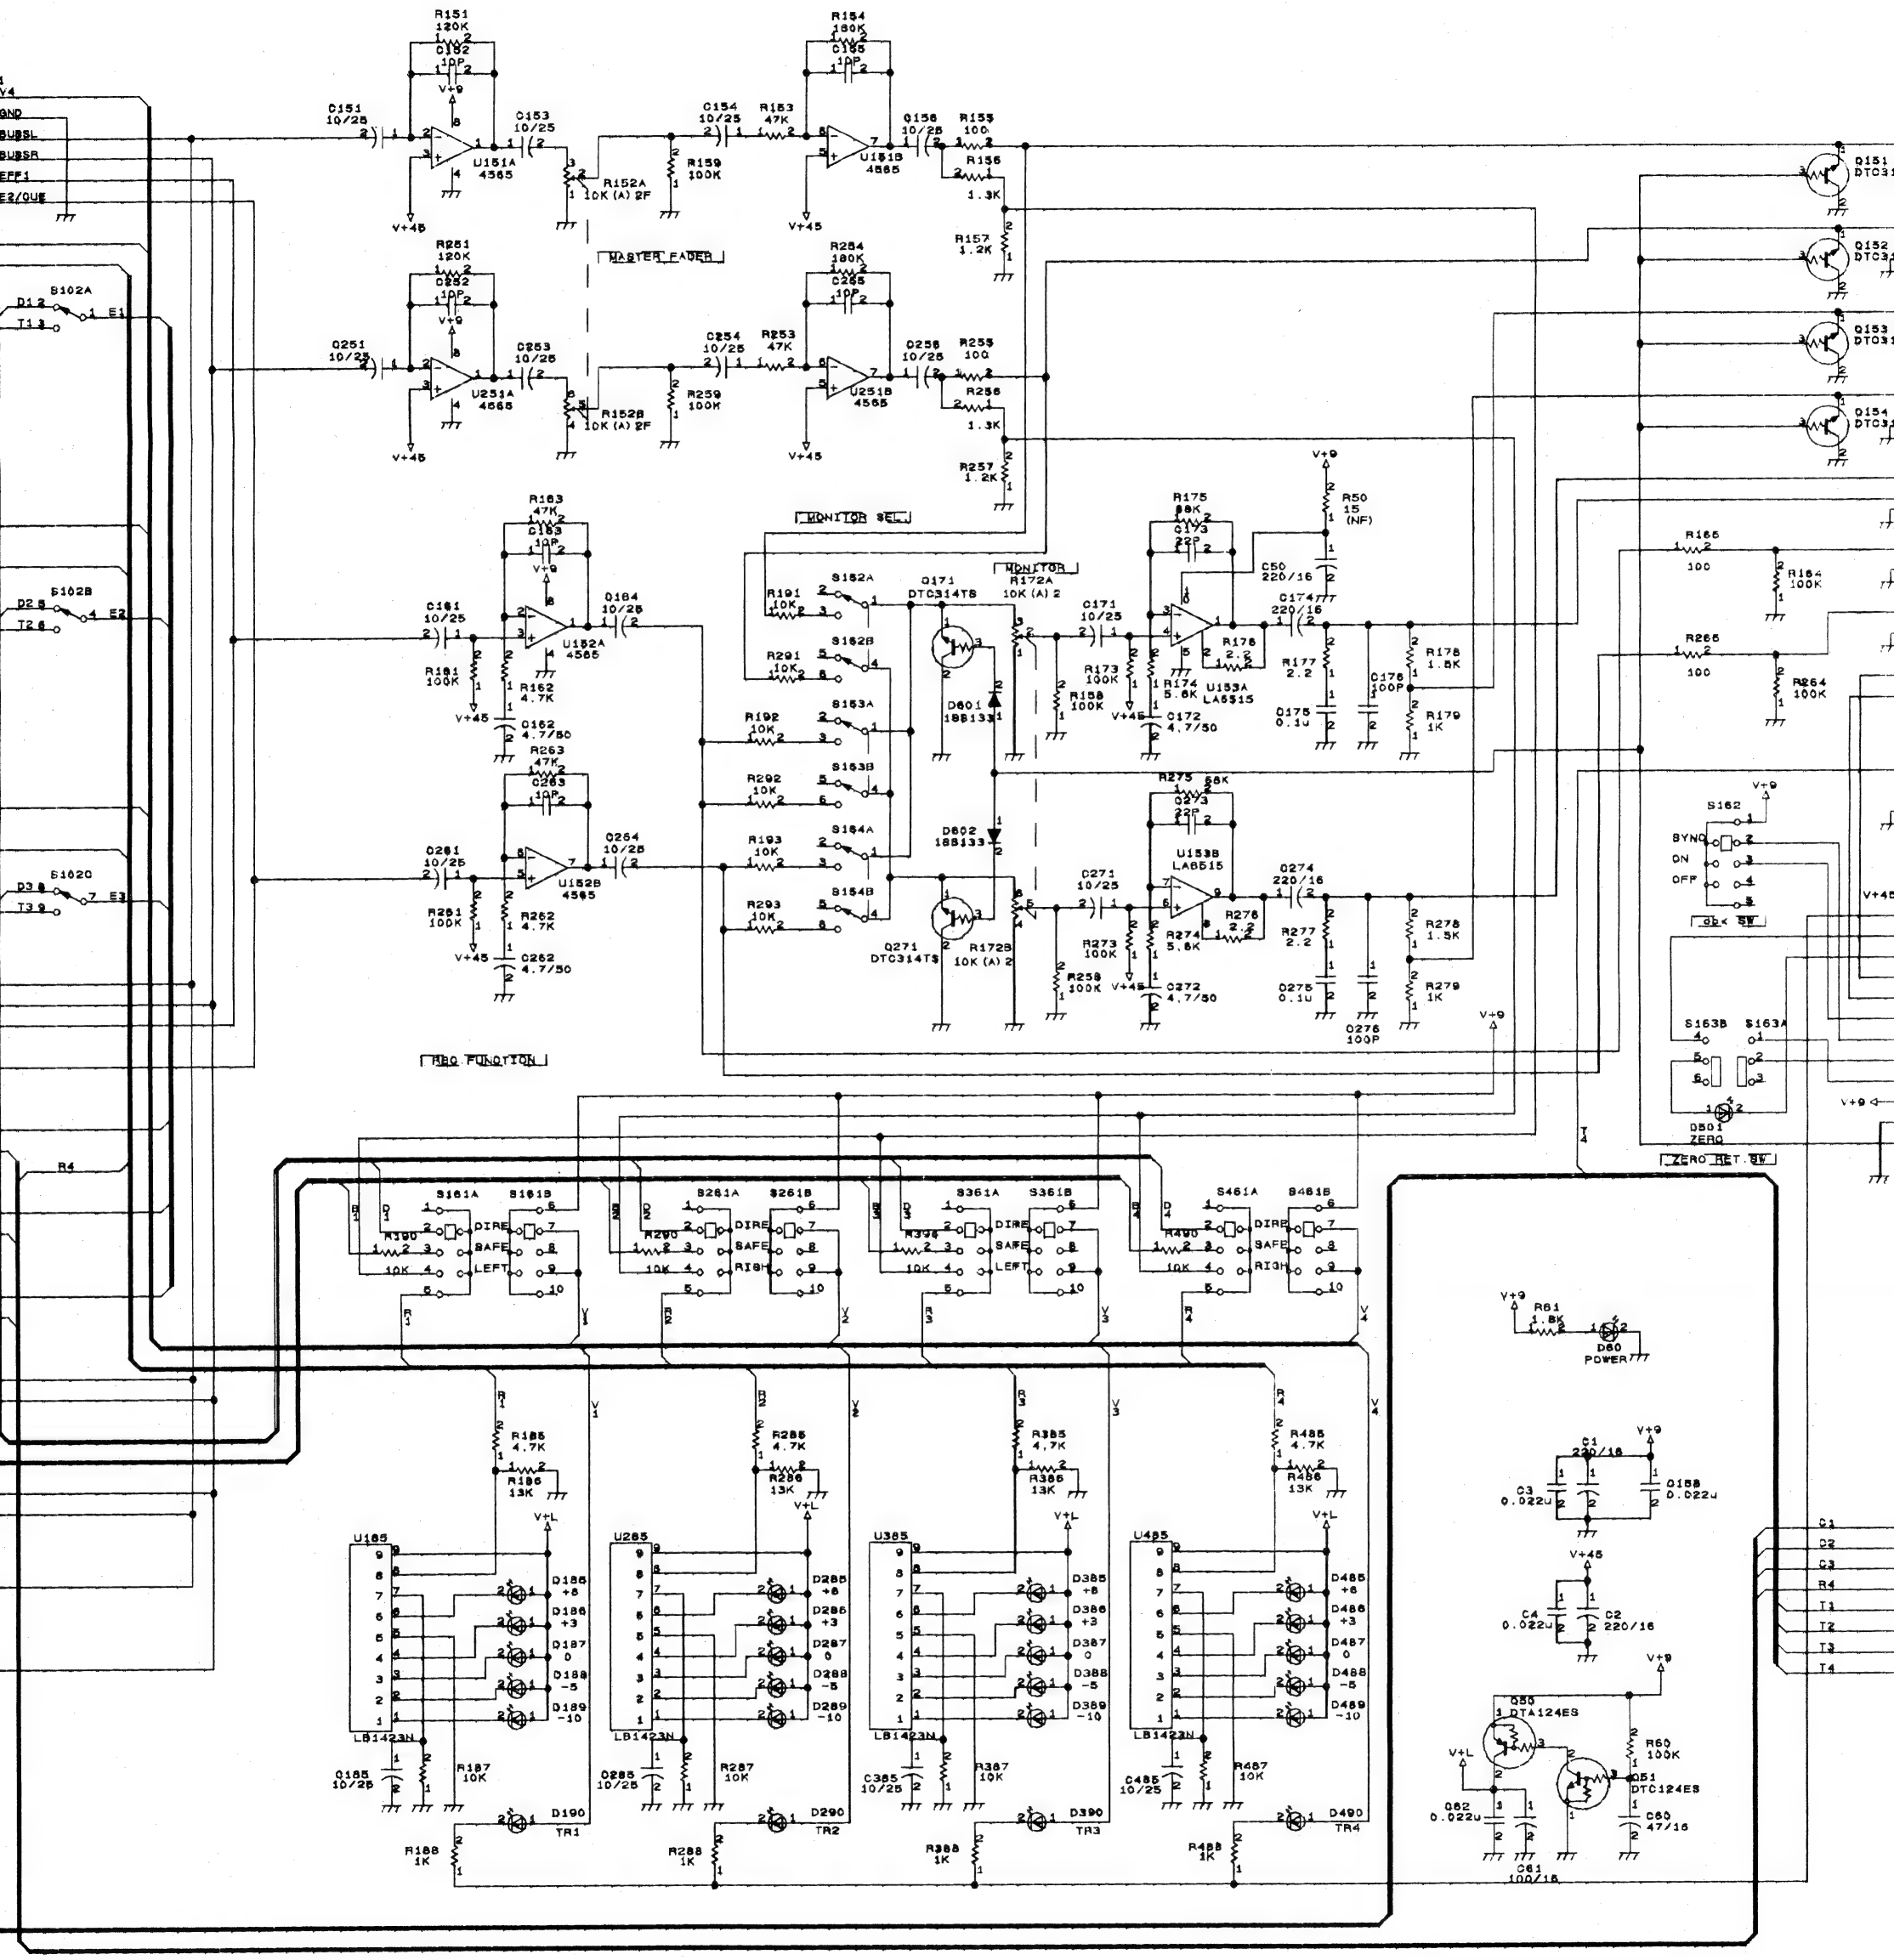
MASTER FADER
MONITOR SEL
MONITOR
REQ FUNCTION
ZERO RET. SW
R151 120K
C151 10/25
C152 10P
C153 10/25
U151A 4565
R152A 10K (A) 2F
R159 100K
C154 10/25
R153 47K
R154 180K
C155 10P
Q156 10/25
R155 100
R156 1.3K
R157 1.2K
U151B 4565
R251 120K
C252 10P
Q251 10/25
C253 10/25
U251A 4565
R152B 10K (A) 2F
R259 100K
C254 10/25
R253 47K
R254 180K
C255 10P
Q256 10/25
R255 100
R256 1.3K
R257 1.2K
U251B 4565
R163 47K
C163 10P
C161 10/25
Q164 10/25
U152A 4565
R161 100K
R162 4.7K
C162 4.7/50
R263 47K
C263 10P
Q261 10/25
Q264 10/25
U152B 4565
R261 100K
R262 4.7K
C262 4.7/50
S102A
S102B
S102C
R4
R191 10K
R291 10K
R192 10K
R292 10K
R193 10K
R293 10K
S152A
S152B
S153A
S153B
S154A
S154B
Q171 DTC314T$
Q271 DTC314T$
R172A 10K (A) 2
R172B 10K (A) 2
D601 1SS133
D602 1SS133
R175 68K
C173 22P
C50 220/16
C171 10/25
R173 100K
R158 100K
R174 5.6K
R178 2.2
U153A LA6515
C172 4.7/50
R177 2.2
C175 0.1U
C174 220/16
C176 100P
R178 1.5K
R179 1K
R275 68K
C273 22P
U153B LA6515
C271 10/25
R273 100K
R258 100K
R274 5.6K
R276 2.2
C272 4.7/50
R277 2.2
C275 0.1U
C274 220/16
C276 100P
R278 1.5K
R279 1K
R50 15 (NF)
R165 100
R164 100K
R265 100
R264 100K
S162
SYNC ON OFF
GLK SW
S163B S163A
D501 ZERO
S161A S161B
S261A S261B
S361A S361B
S461A S461B
R190 10K
R290 10K
R390 10K
R490 10K
DIRE SAFE LEFT RIGH
R185 4.7K
R186 13K
R285 4.7K
R286 13K
R385 4.7K
R386 13K
R485 4.7K
R486 13K
U185 U285 U385 U485
LB1423N
D186 +6
D186 +3
D187 0
D188 -5
D189 -10
D286 +6
D286 +3
D287 0
D288 -5
D289 -10
D386 +6
D386 +3
D387 0
D388 -5
D389 -10
D486 +6
D486 +3
D487 0
D488 -5
D489 -10
C185 10/25
R187 10K
R188 1K
D190 TR1
C285 10/25
R287 10K
R288 1K
D290 TR2
C385 10/25
R387 10K
R388 1K
D390 TR3
C485 10/25
R487 10K
R488 1K
D490 TR4
R61 1.8K
D60 POWER
C1 220/16
C3 0.022U
C158 0.022U
C4 0.022U
C2 220/16
Q50 DTA124ES
Q51 DTC124ES
Q52 0.022U
C60 47/16
C61 100/16
R60 100K
V+9
V+45
V+L
GND
BUSSL
BUSSR
EFF1
E2/CUE

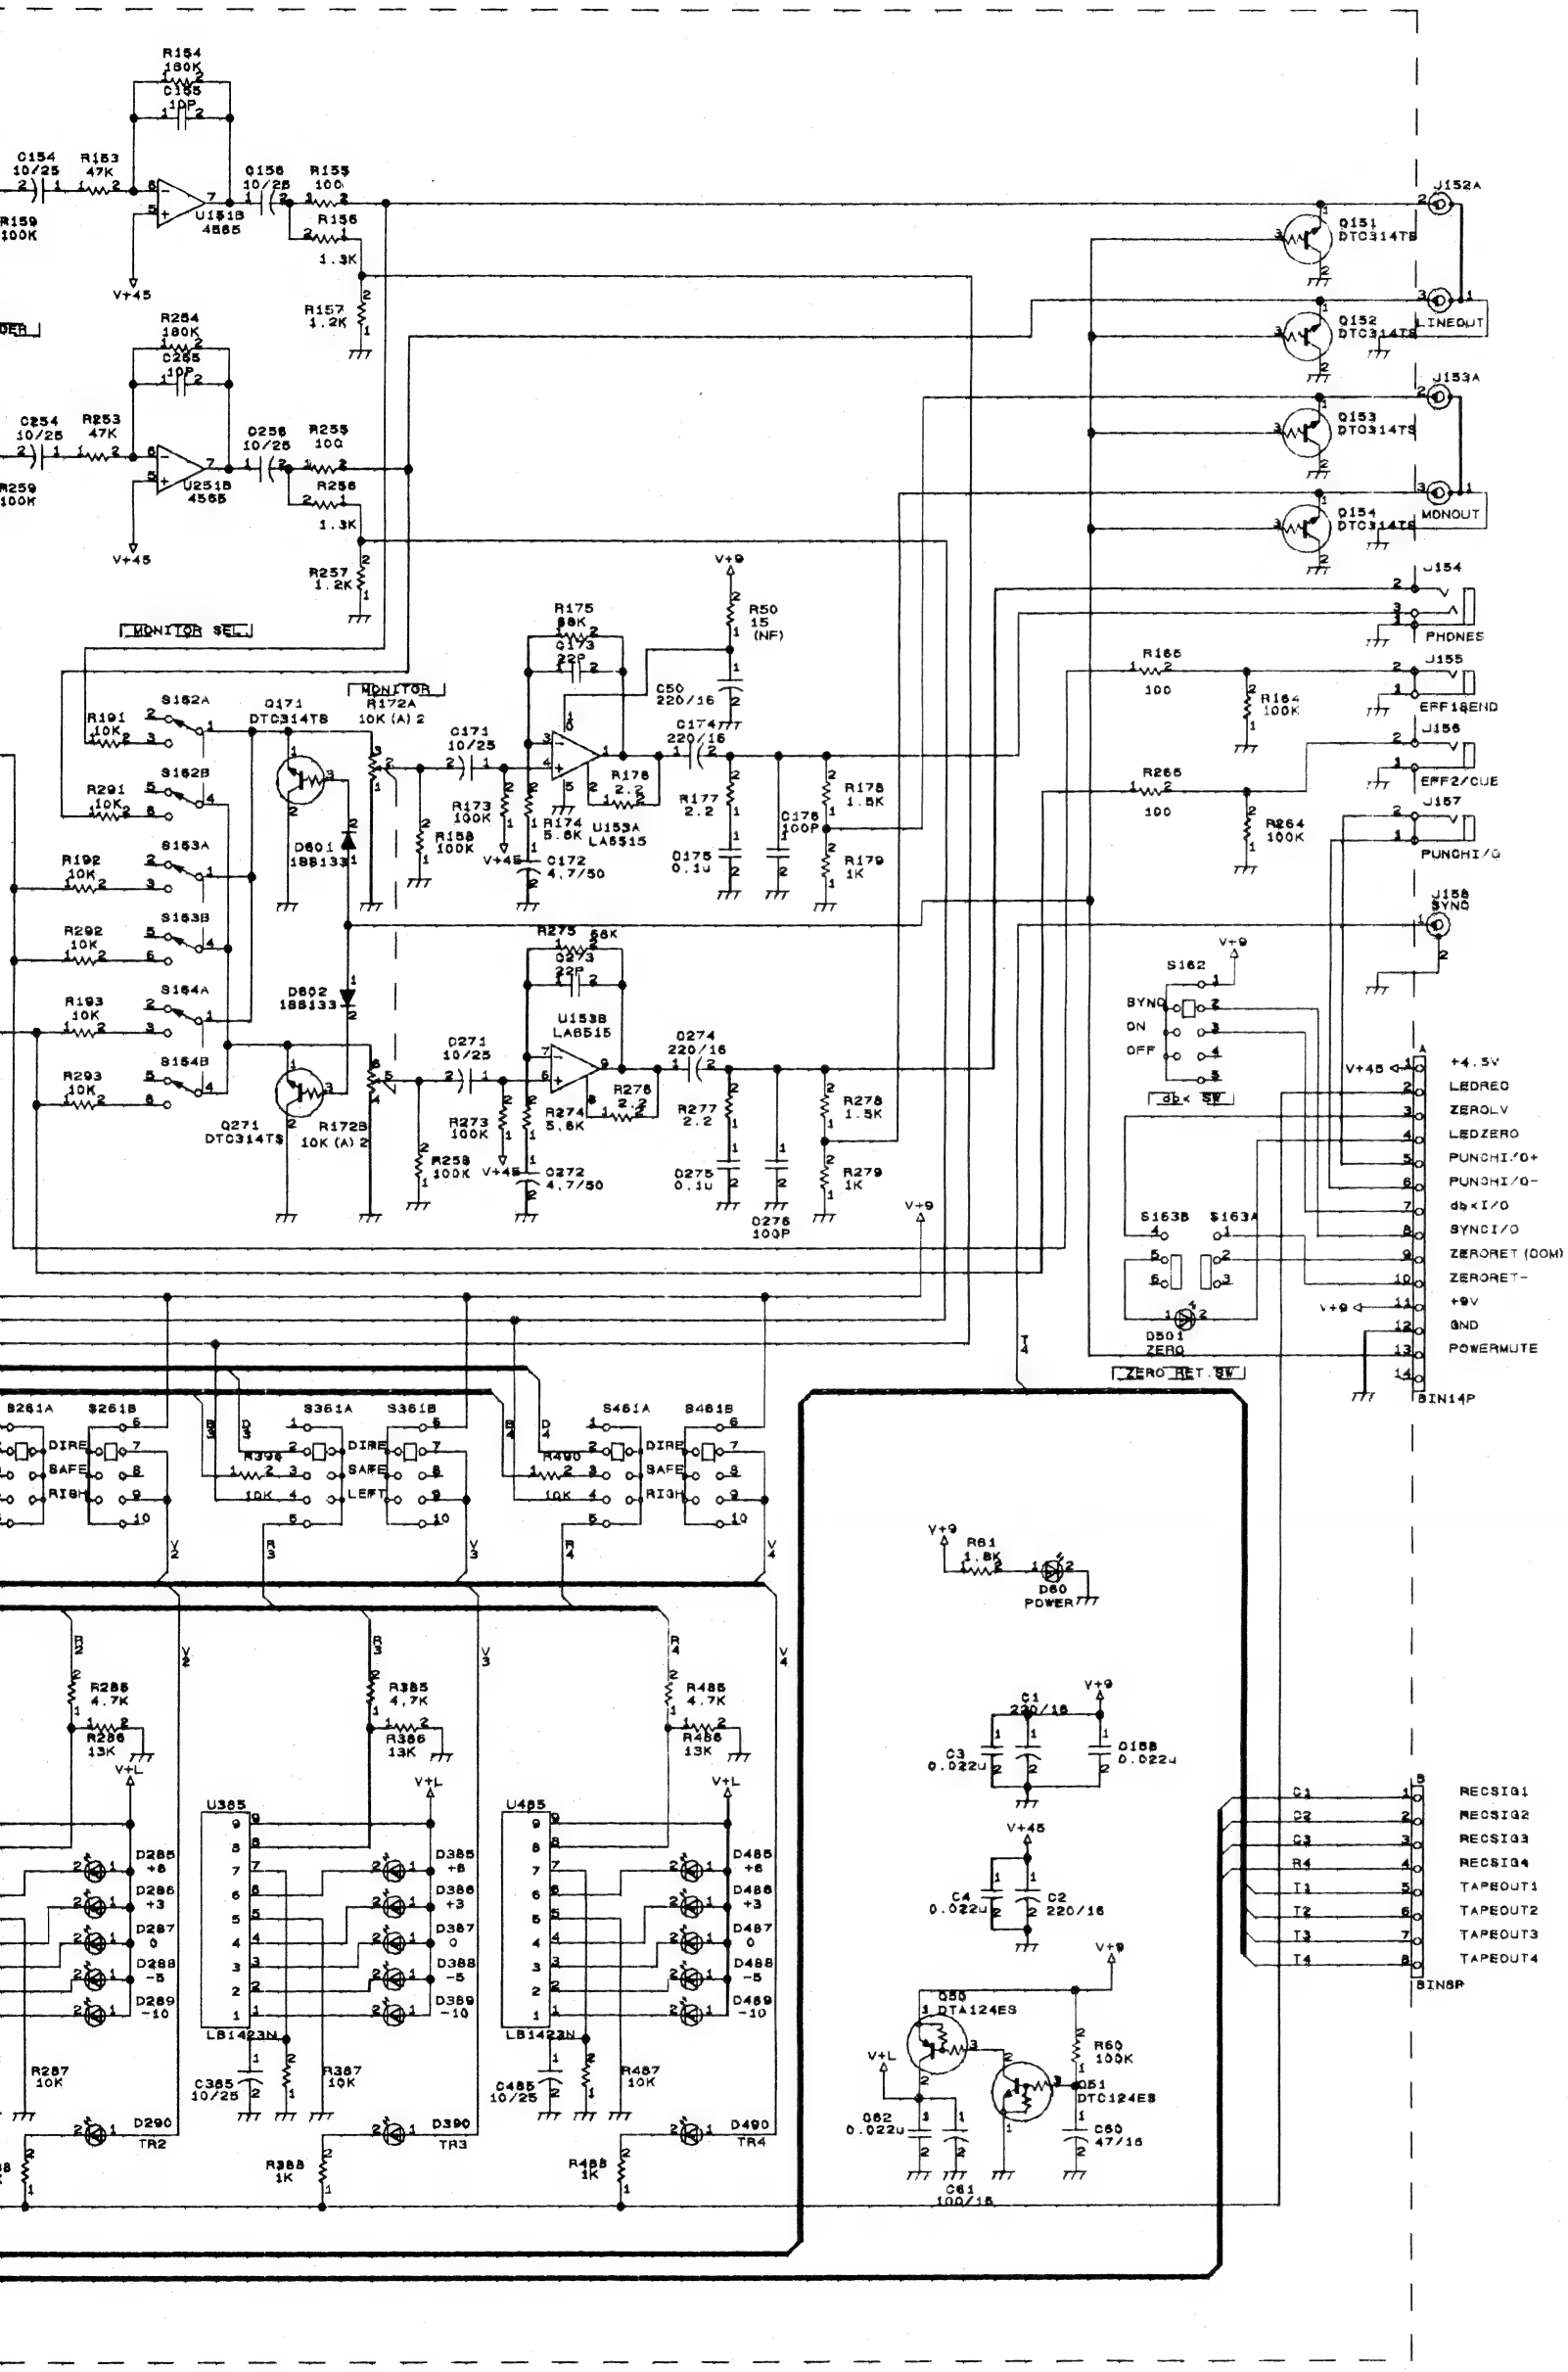
R154 180K
C155 10P
C154 10/25
R153 47K
U151B 4565
C156 10/25
R155 100
R156 1.3K
R157 1.2K
V+45
R159 100K
R254 180K
C255 10P
C254 10/25
R253 47K
U251B 4565
C256 10/25
R255 100
R256 1.3K
R257 1.2K
V+45
MONITOR SEL.
MONITOR
R172A 10K (A) 2
S162A
S162B
S163A
S163B
S164A
S164B
R191 10K
R291 10K
R192 10K
R292 10K
R193 10K
R293 10K
Q171 DTC314TS
D601 1SS133
D602 1SS133
Q271 DTC314TS
R172B 10K (A) 2
C171 10/25
R173 100K
R158 100K
R174 5.6K
U153A LA6515
C172 4.7/50
R175 68K
C173 22P
R178 2.2
C177 220/16
C175 0.1U
C176 100P
R178 1.5K
R179 1K
C50 220/16
R50 15 (NF)
V+9
R275 68K
C273 22P
U153B LA6515
C271 10/25
R273 100K
R258 100K
R274 5.6K
C272 4.7/50
R276 2.2
R277 2.2
C275 0.1U
C276 100P
R278 1.5K
R279 1K
V+9
Q151 DTC314TS
Q152 DTC314TS
Q153 DTC314TS
Q154 DTC314TS
J152A
J153A
LINEOUT
MONOUT
J154
PHONES
J155
ERF1&END
J156
ERF2/CUE
J157
PUNCHI/O
J158 SYNC
R166 100
R164 100K
R265 100
R264 100K
S162
SYNC
ON
OFF
db< SW
S163B
S163A
D501 ZERO
ZERO RET. SW
V+45
+4.5V
LEDREC
ZEROLV
LEDZERO
PUNCHI/O+
PUNCHI/O-
db<I/O
SYNCI/O
ZERORET (OOM)
ZERORET-
+9V
GND
POWERMUTE
BIN14P
S261A
S261B
S361A
S361B
S461A
S461B
DIRE
SAFE
RIGH
LEFT
R396 10K
R490 10K
R285 4.7K
R286 13K
R385 4.7K
R386 13K
R485 4.7K
R486 13K
V+L
U385
U485
LB1423N
D285 +6
D286 +3
D287 0
D288 -5
D289 -10
D385 +6
D386 +3
D387 0
D388 -5
D389 -10
D485 +6
D486 +3
D487 0
D488 -5
D489 -10
D290 TR2
D390 TR3
D490 TR4
R287 10K
R387 10K
R487 10K
C385 10/25
C485 10/25
R388 1K
R488 1K
R61 1.8K
D60 POWER
C1 220/16
C3 0.022U
D1SS 0.022U
C4 0.022U
C2 220/16
Q50 DTA124ES
Q51 DTC124ES
Q52 0.022U
R60 100K
C60 47/16
C61 100/16
C1
C2
C3
R4
T1
T2
T3
T4
BIN8P
RECSIG1
RECSIG2
RECSIG3
RECSIG4
TAPEOUT1
TAPEOUT2
TAPEOUT3
TAPEOUT4

CH1

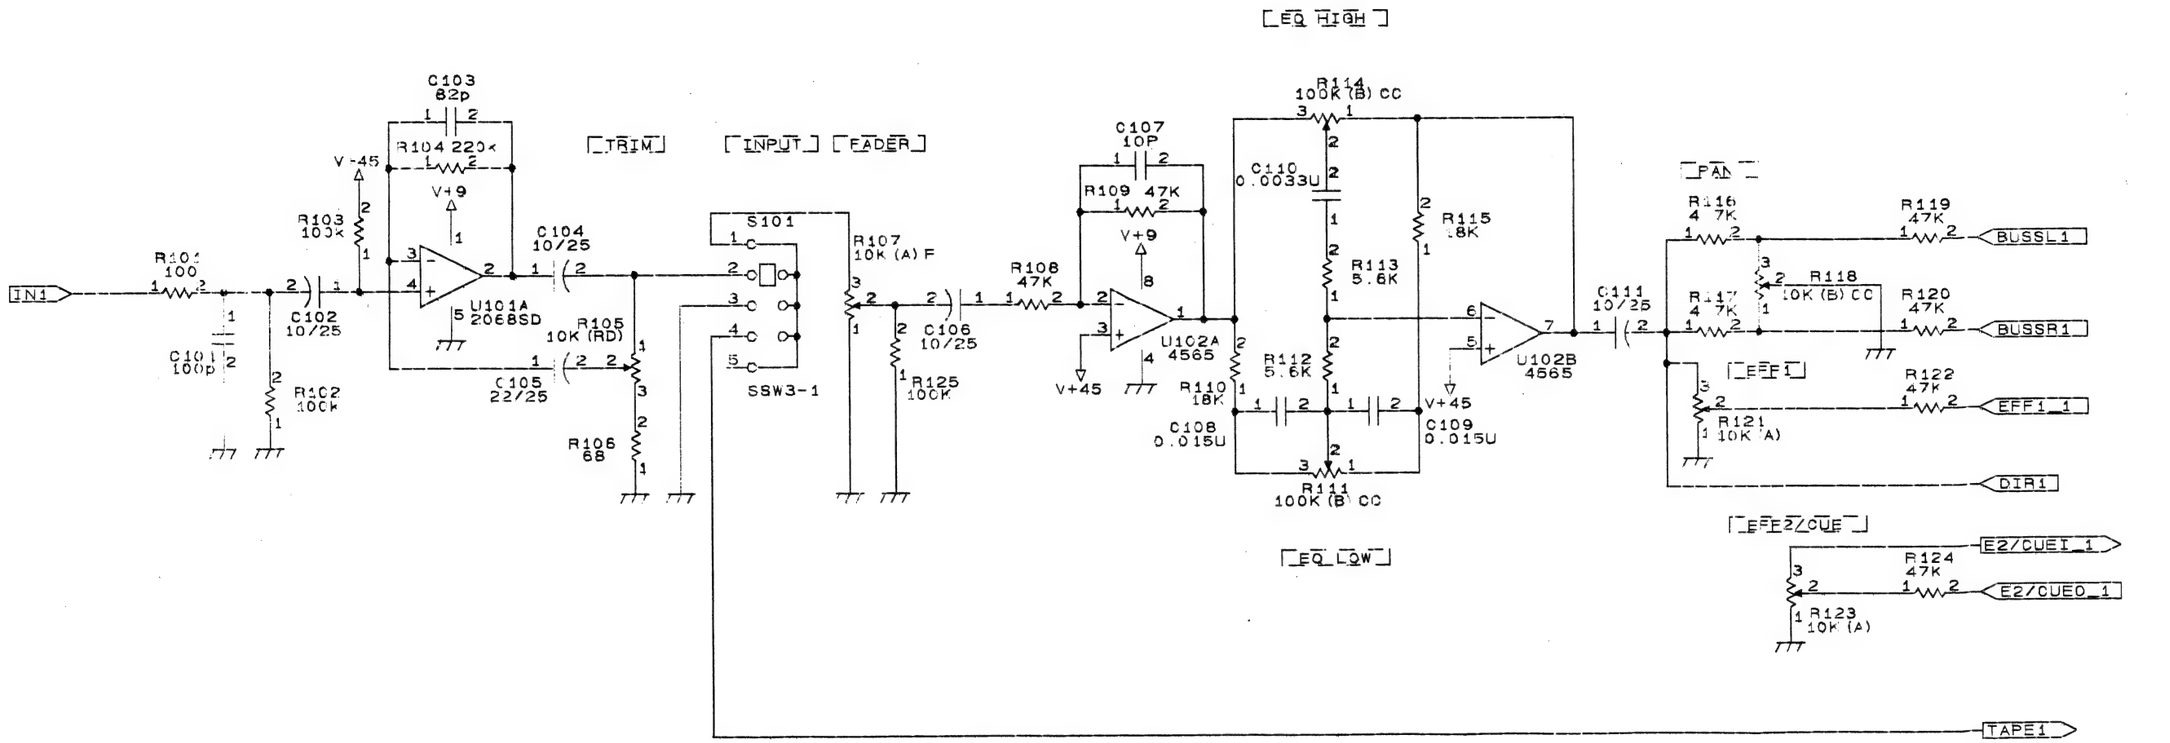
[EQ HIGH]
C103 82p
R104 220K
[TRIM]
[INPUT]
[FADER]
V-45
V+9
R103 100K
C104 10/25
S101
R107 10K (A) F
R108 47K
C107 10P
R114 100K (B) CC
C110 0.0033U
R109 47K
R115 18K
R113 5.6K
[PAN]
R116 4.7K
R119 47K
BUSSL1
R118 10K (B) CC
R117 4.7K
R120 47K
BUSSR1
IN1
R101 100
C102 10/25
U101A 2068SD
R105 10K (RD)
C101 100p
R102 100K
C105 22/25
R106 68
SSW3-1
C106 10/25
R125 100K
U102A 4565
R112 5.6K
R110 18K
C108 0.015U
C109 0.015U
R111 100K (B) CC
U102B 4565
C111 10/25
[EFF1]
R122 47K
EFF1_1
R121 10K (A)
DIR1
[EFF2/CUE]
E2/CUEI_1
R124 47K
E2/CUEO_1
R123 10K (A)
[EQ LOW]
TAPE1

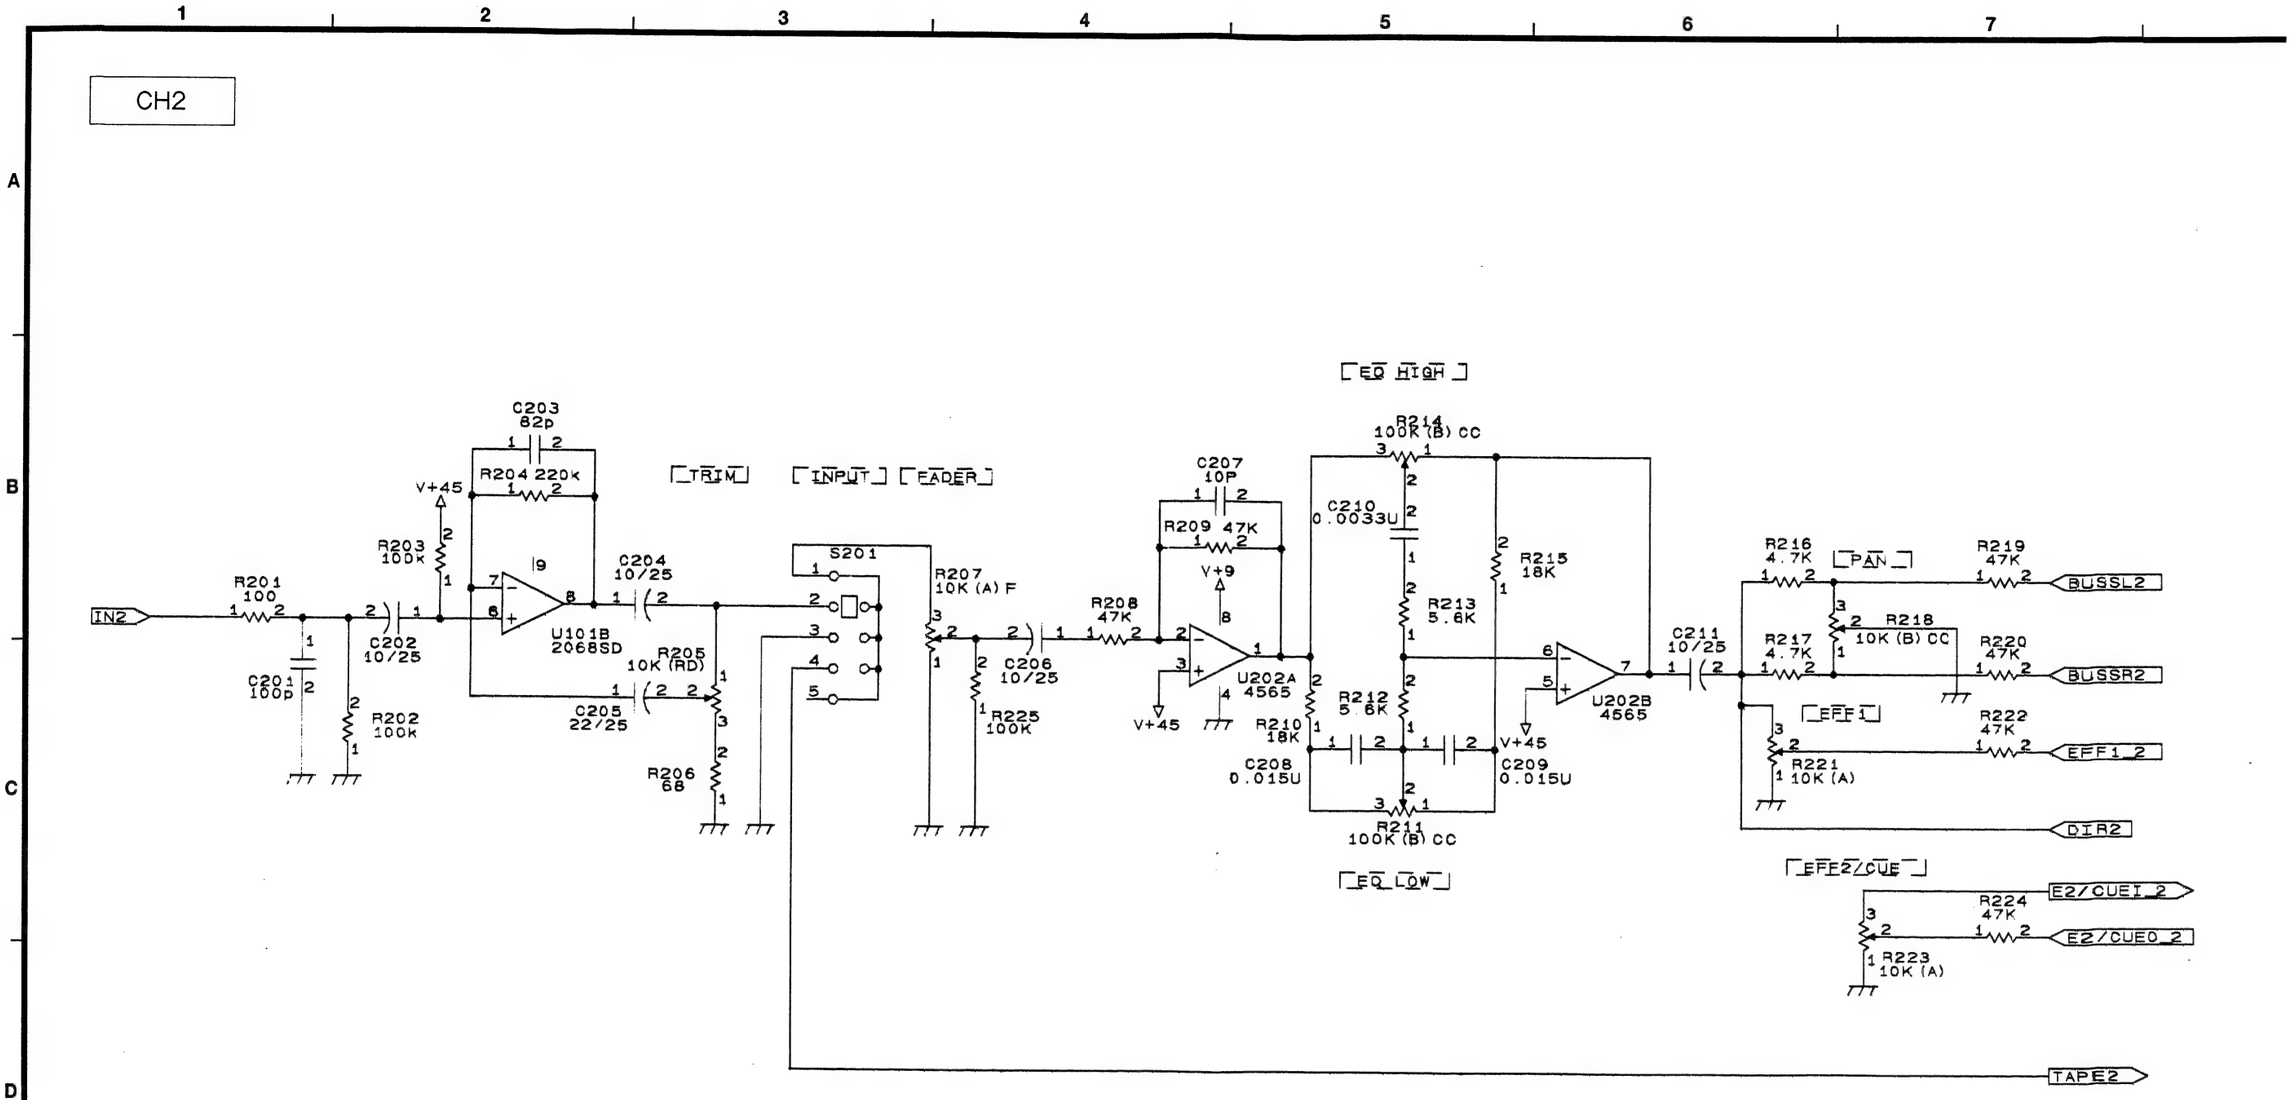
CH2
IN2
R201 100
C201 100p
C202 10/25
R202 100K
C203 82p
R204 220K
V+45
R203 100K
U101B 2068SD
C204 10/25
R205 10K (RD)
C205 22/25
R206 68
TRIM
INPUT
FADER
S201
R207 10K (A) F
C206 10/25
R225 100K
EQ HIGH
R208 47K
C207 10P
R209 47K
V+9
U202A 4565
V+45
R214 100K (B) CC
C210 0.0033U
R215 18K
R213 5.6K
R212 5.6K
R210 18K
C208 0.015U
C209 0.015U
R211 100K (B) CC
EQ LOW
U202B 4565
C211 10/25
R216 4.7K
PAN
R219 47K
BUSSL2
R218 10K (B) CC
R217 4.7K
R220 47K
BUSSR2
EFF1
R222 47K
EFF1_2
R221 10K (A)
DIR2
EFF2/CUE
E2/CUEI_2
R224 47K
E2/CUEO_2
R223 10K (A)
TAPE2

CH3

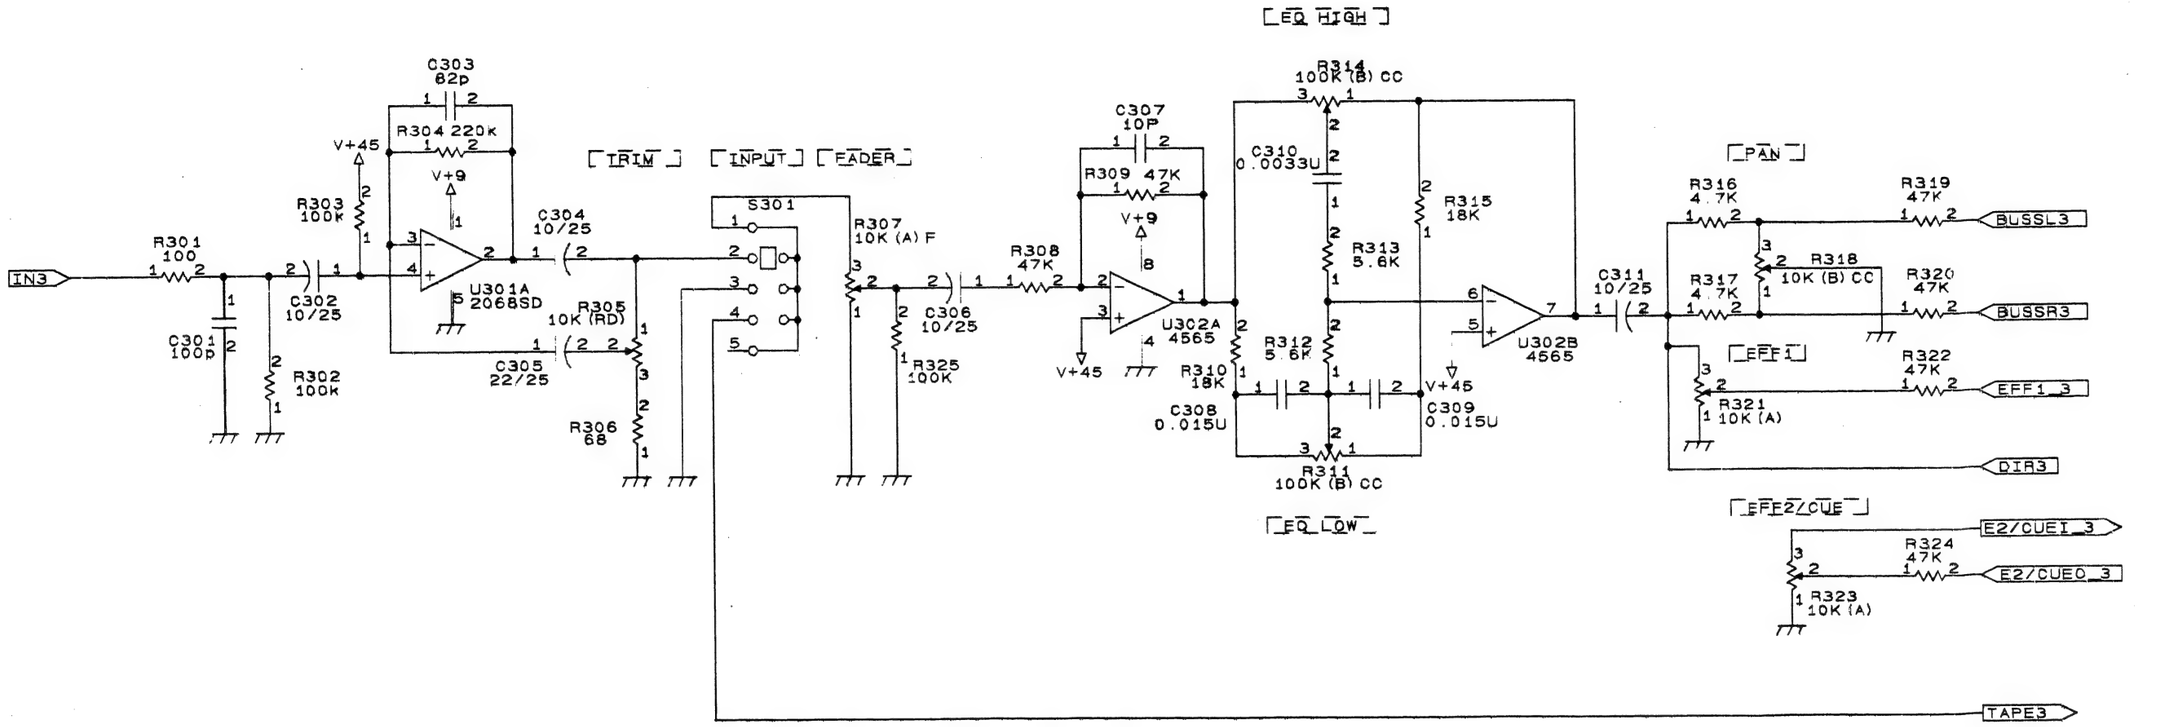
IN3
R301 100
C301 100p
C302 10/25
R302 100k
C303 82p
R304 220k
V+45
V+9
R303 100k
U301A 2068SD
C304 10/25
C305 22/25
R305 10K (RD)
R306 68
TRIM
INPUT
FADER
S301
R307 10K (A) F
C306 10/25
R325 100K
EQ HIGH
R308 47K
C307 10P
R309 47K
U302A 4565
R310 18K
C308 0.015U
R312 5.6K
R313 5.6K
R314 100K (B) CC
C310 0.0033U
R315 18K
C309 0.015U
R311 100K (B) CC
EQ LOW
U302B 4565
C311 10/25
PAN
R316 4.7K
R317 4.7K
R318 10K (B) CC
R319 47K
R320 47K
R321 10K (A)
R322 47K
BUSSL3
BUSSR3
EFF1
EFF1_3
DIR3
EFF2/CUE
R324 47K
R323 10K (A)
E2/CUEI_3
E2/CUEO_3
TAPE3

CH4

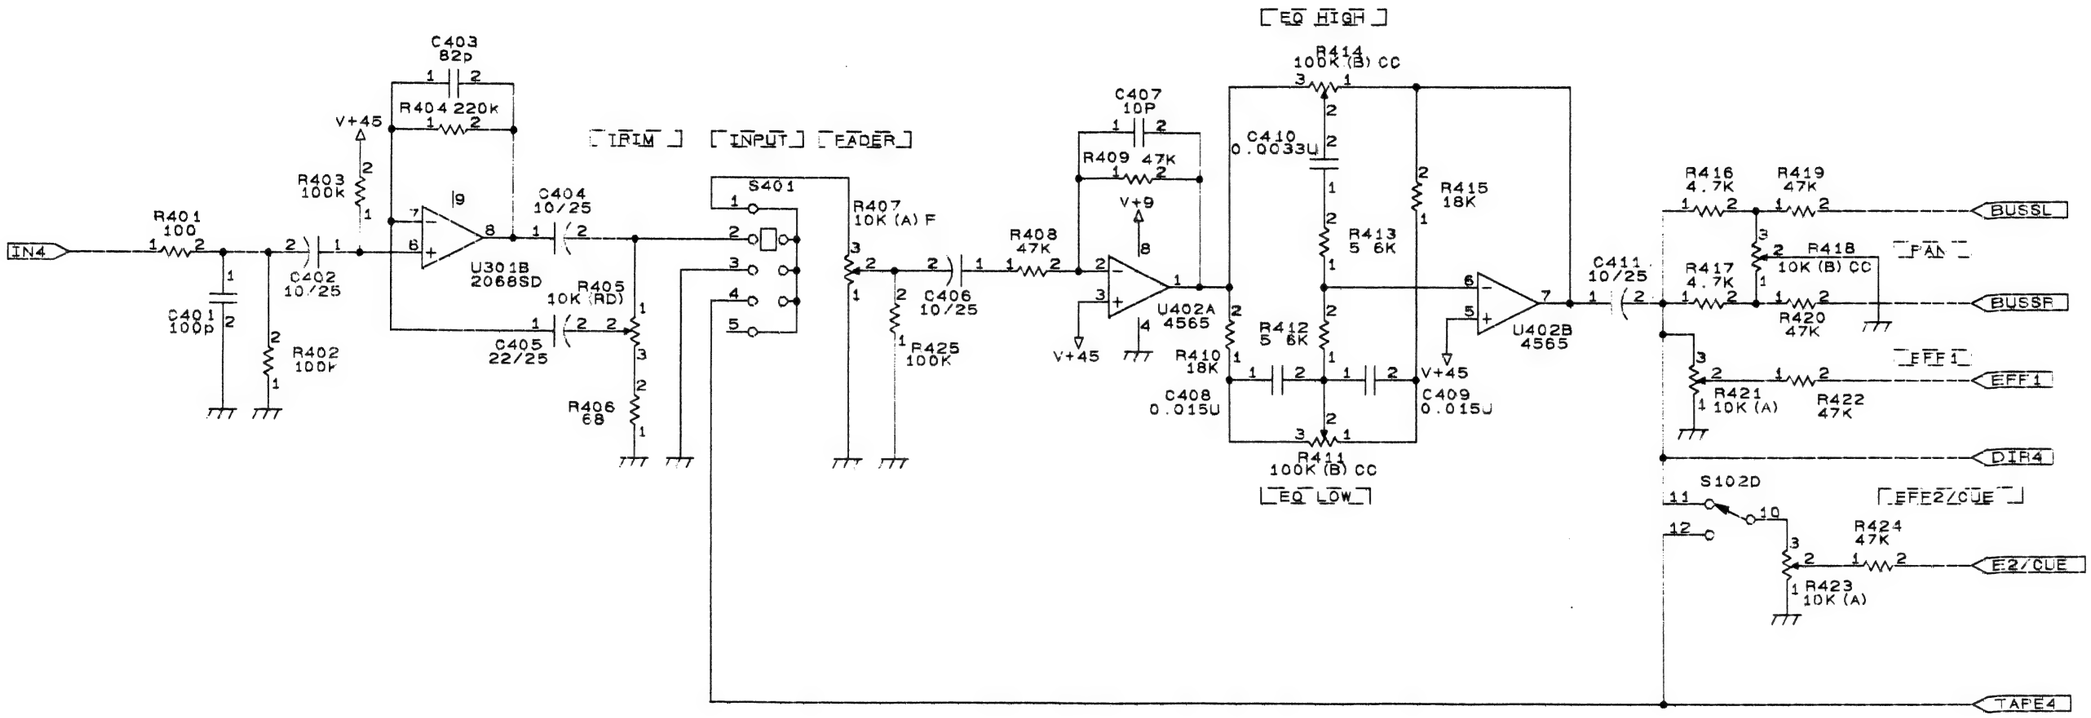
IN4
R401 100
C401 100p
C402 10/25
R402 100k
R403 100k
V+45
C403 82p
R404 220k
U301B 2068SD
C404 10/25
C405 22/25
R405 10K (RD)
R406 68
TRIM
INPUT
FADER
S401
R407 10K (A) F
C406 10/25
P425 100K
EQ HIGH
R414 100K (B) CC
C407 10P
R409 47K
C410 0.0033U
R408 47K
V+9
U402A 4565
R410 18K
C408 0.015U
R412 5 6K
R413 5 6K
R415 18K
R411 100K (B) CC
C409 0.015U
U402B 4565
EQ LOW
C411 10/25
R416 4.7K
R419 47K
R418 10K (B) CC
PAN
R417 4.7K
R420 47K
BUSSL
BUSSR
EFF1
R421 10K (A)
R422 47K
DIR4
S102D
EFF2/CUE
R424 47K
R423 10K (A)
E2/CUE
TAPE4

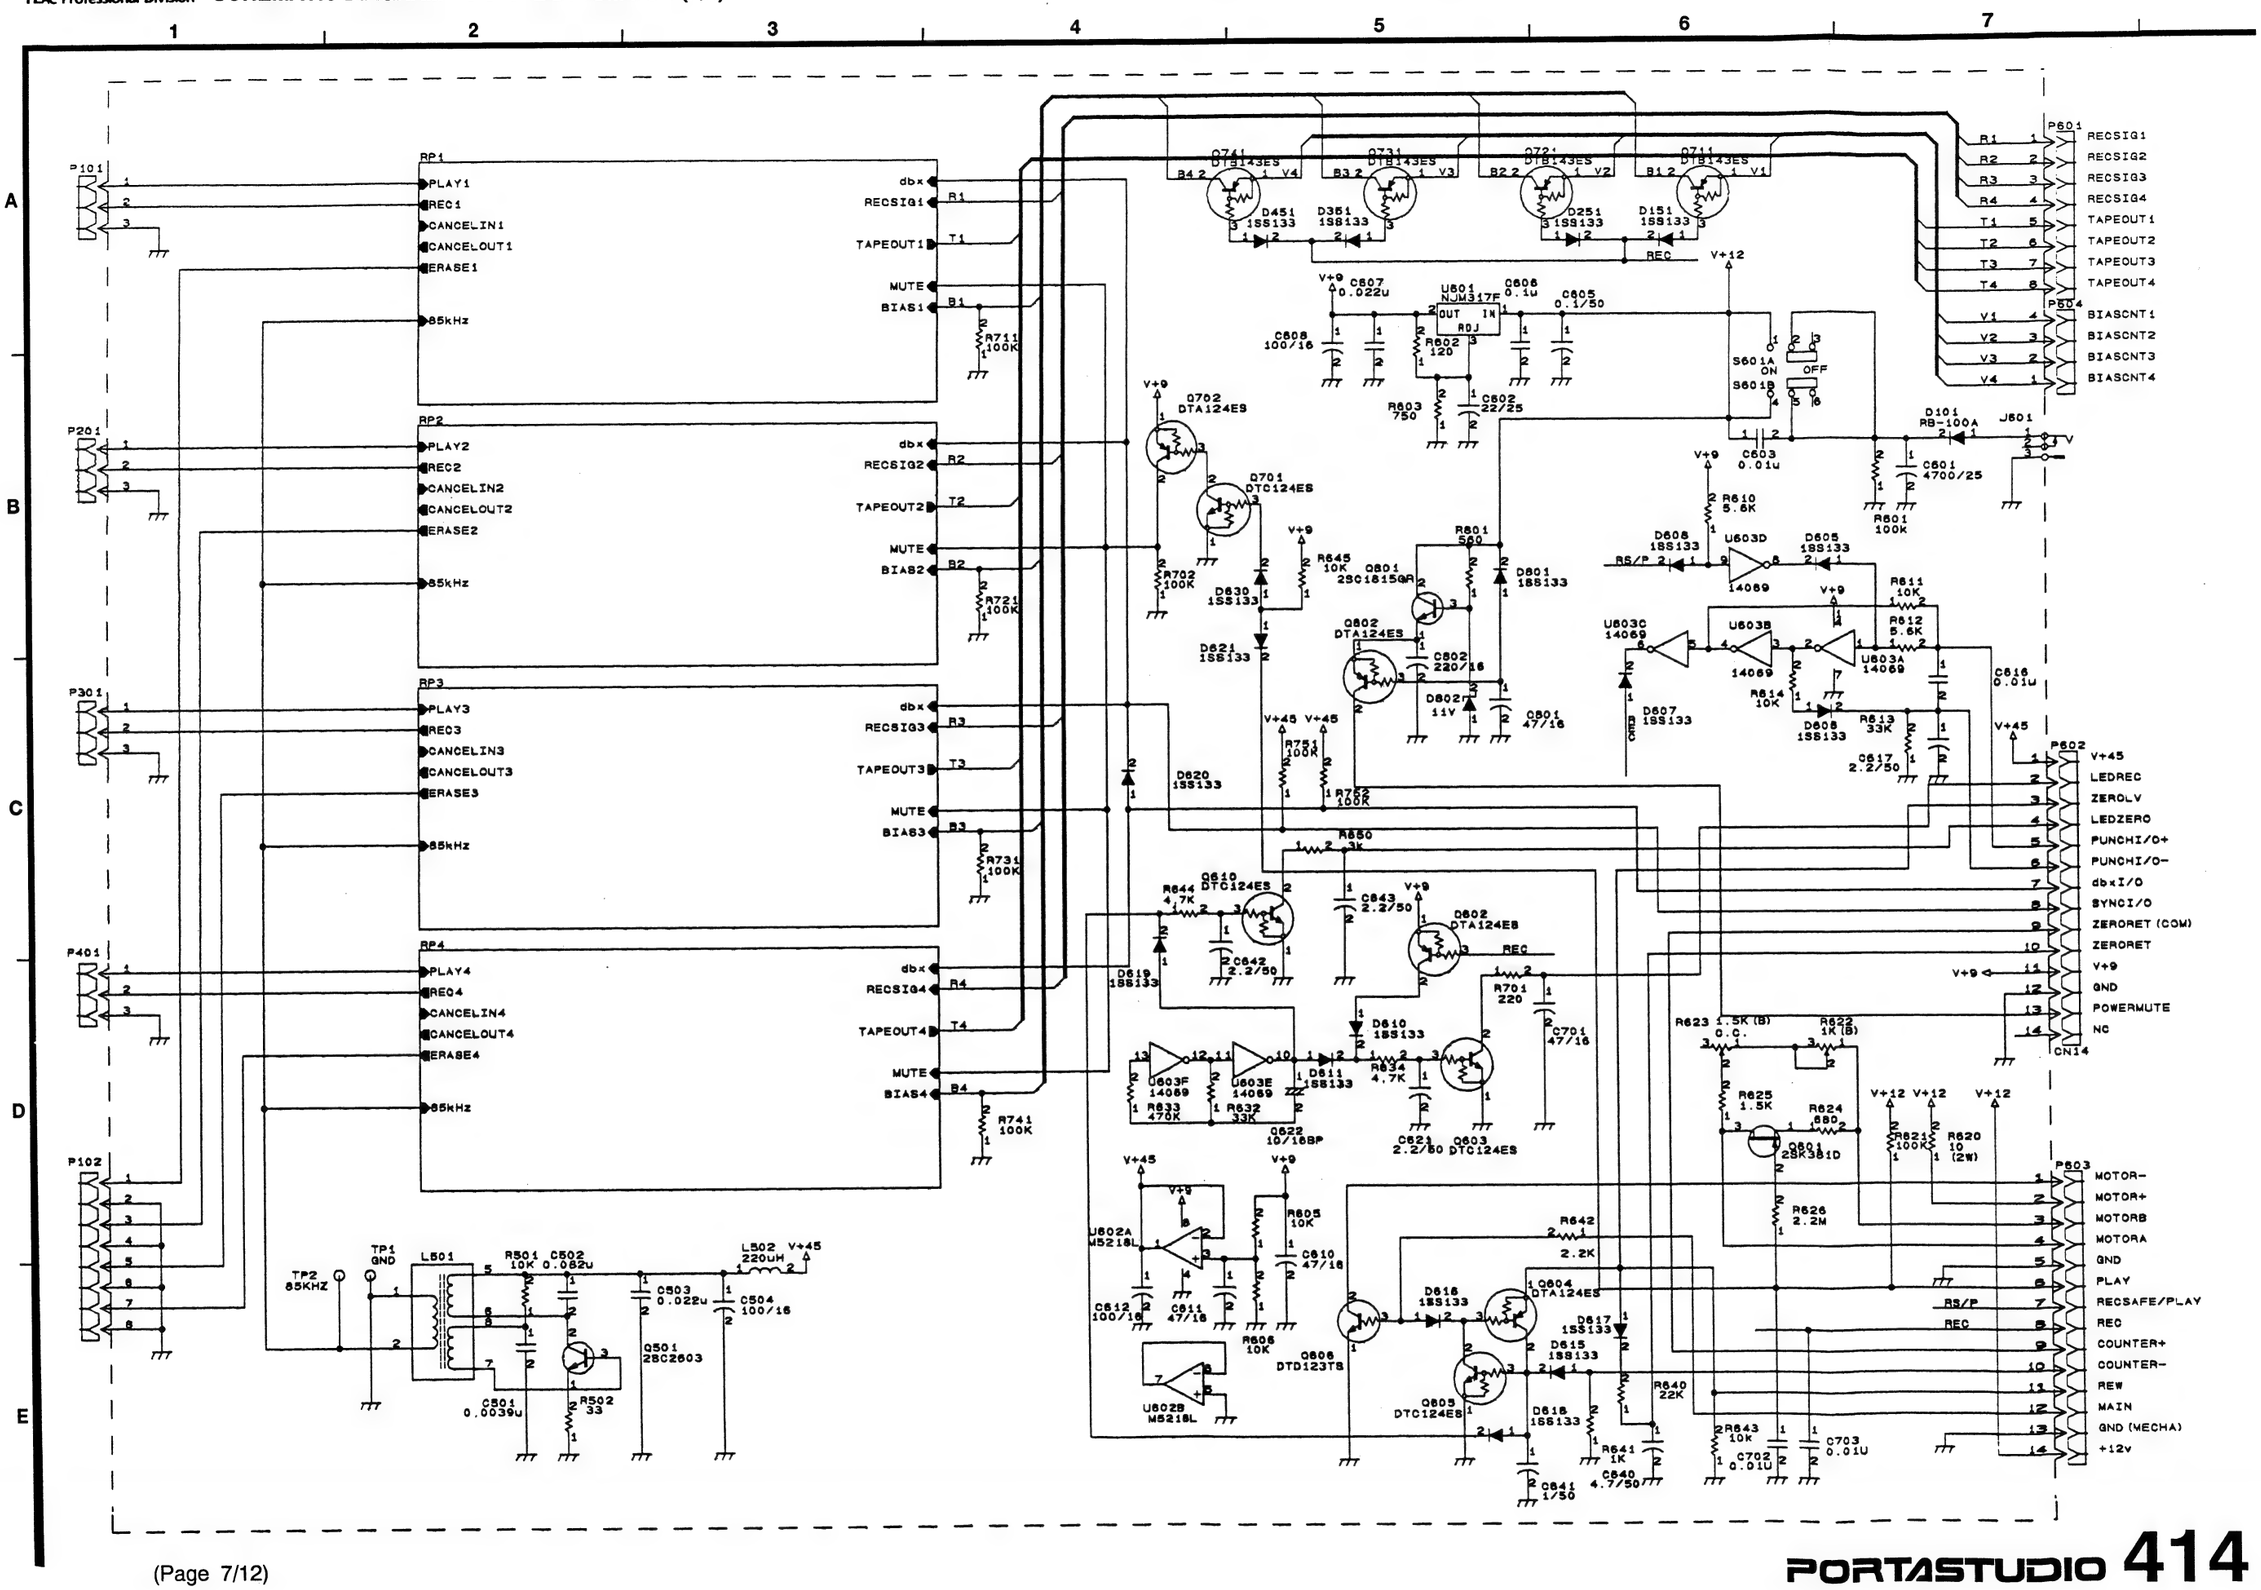
1
2
3
4
5
6
7
A
B
C
D
E
P101
P201
P301
P401
P102
RP1
RP2
RP3
RP4
PLAY1
REC1
CANCELIN1
CANCELOUT1
ERASE1
85kHz
dbx
RECSIG1
TAPEOUT1
MUTE
BIAS1
PLAY2
REC2
CANCELIN2
CANCELOUT2
ERASE2
RECSIG2
TAPEOUT2
BIAS2
PLAY3
REC3
CANCELIN3
CANCELOUT3
ERASE3
RECSIG3
TAPEOUT3
BIAS3
PLAY4
REC4
CANCELIN4
CANCELOUT4
ERASE4
RECSIG4
TAPEOUT4
BIAS4
TP1 GND
TP2 85KHZ
L501
L502 220uH
Q501 2SC2603
Q741 DTB143ES
Q731 DTB143ES
Q721 DTB143ES
Q711 DTB143ES
D451 1SS133
D351 1SS133
D251 1SS133
D151 1SS133
REC
V+12
V+9
U601 NJM317F
OUT IN ADJ
S601A ON OFF
S601B
D101 RB-100A
J601
Q702 DTA124ES
Q701 DTC124ES
Q801 2SC1815GR
Q802 DTA124ES
D801 1SS133
D802 11V
D620 1SS133
D621 1SS133
D630 1SS133
U603D 14069
U603C 14069
U603B 14069
U603A 14069
D607 1SS133
D608 1SS133
D605 1SS133
V+45
Q610 DTC124ES
D619 1SS133
Q602 DTA124ES
D610 1SS133
D611 1SS133
U603F 14069
U603E 14069
Q622 10/16BP
Q621 2.2/50
Q603 DTC124ES
U602A M5218L
U602B M5218L
Q606 DTD123TS
Q604 DTA124ES
Q605 DTC124ES
D616 1SS133
D617 1SS133
D615 1SS133
D618 1SS133
Q801 2SK381D
P601
P604
P602
P603
CN14
RECSIG1
RECSIG2
RECSIG3
RECSIG4
TAPEOUT1
TAPEOUT2
TAPEOUT3
TAPEOUT4
BIASCNT1
BIASCNT2
BIASCNT3
BIASCNT4
V+45
LEDREC
ZEROLV
LEDZERO
PUNCHI/O+
PUNCHI/O-
dbxI/O
SYNCI/O
ZERORET (COM)
ZERORET
V+9
GND
POWERMUTE
NC
MOTOR-
MOTOR+
MOTORB
MOTORA
GND
PLAY
RS/P
REC
REC SAFE/PLAY
COUNTER+
COUNTER-
REW
MAIN
GND (MECHA)
+12v

CH1

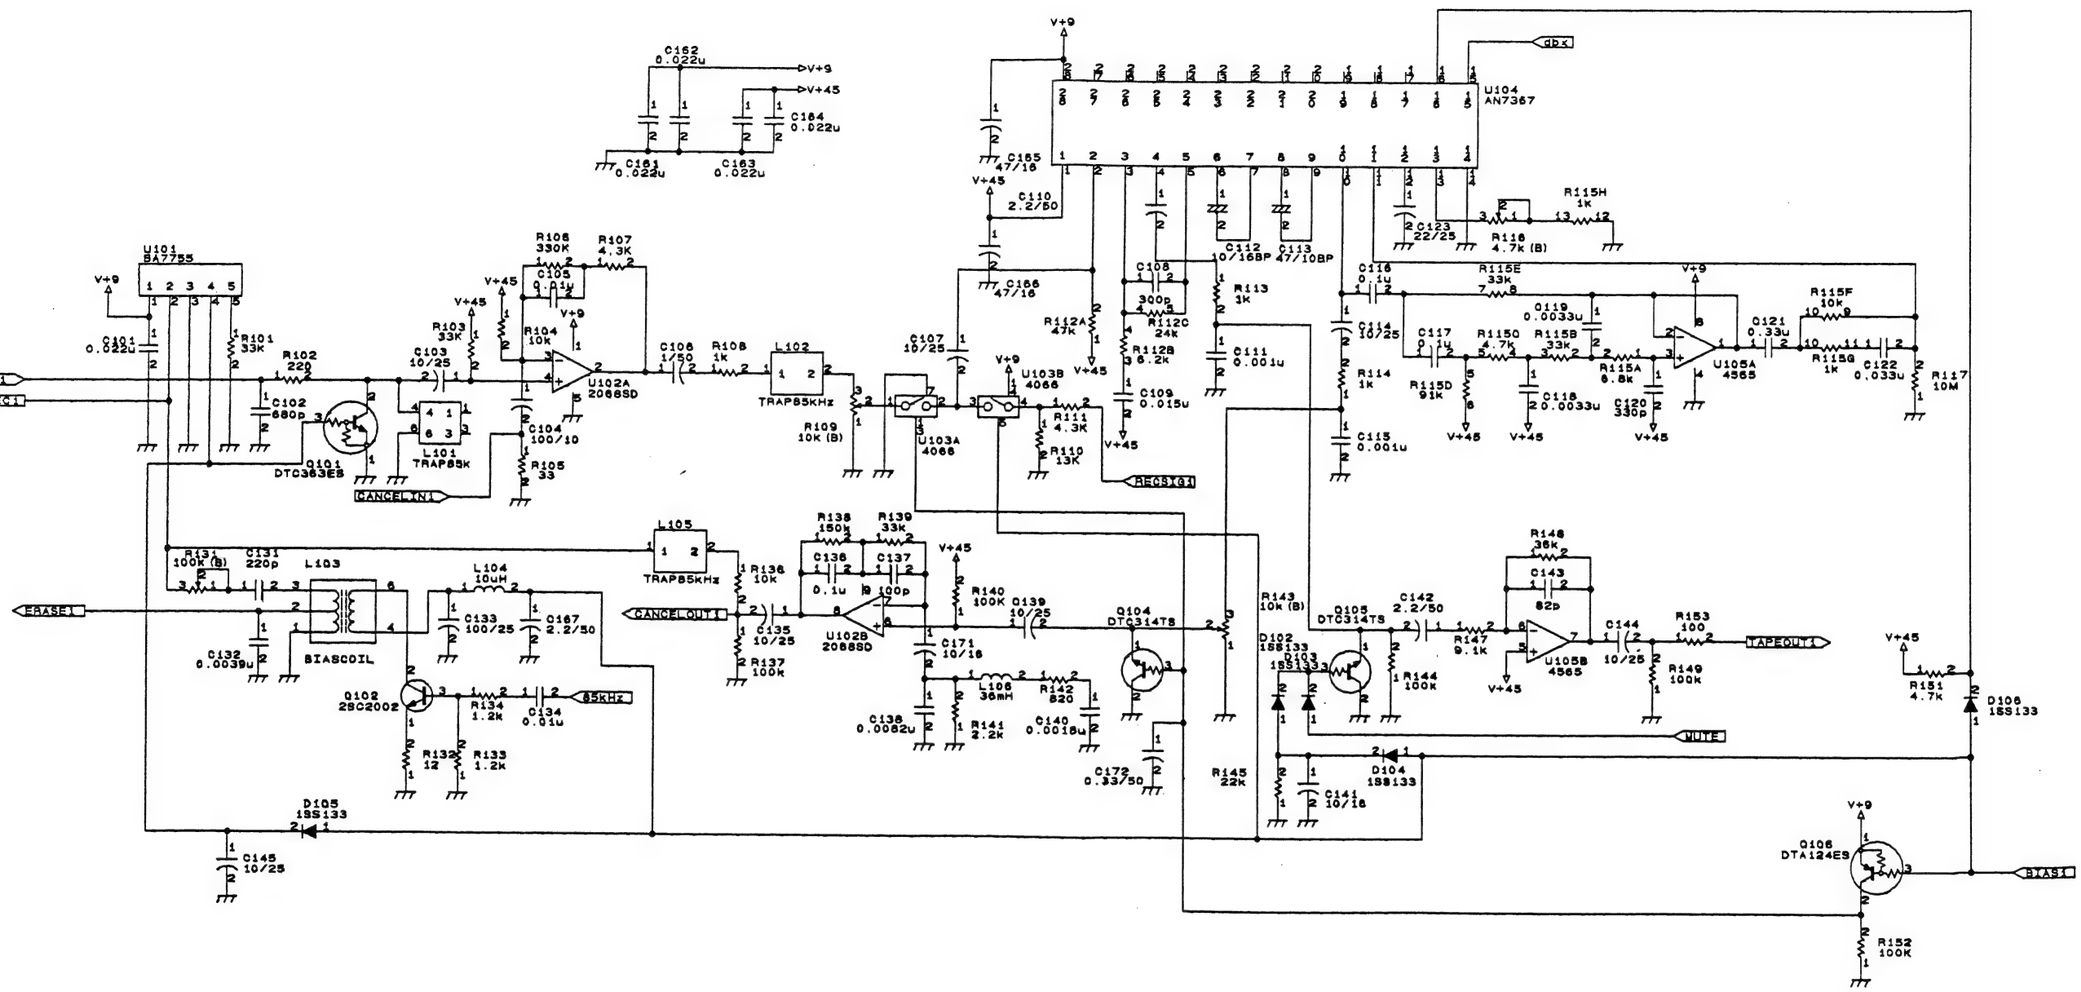
U101 BA7755
U102A 2068SD
U103A 4066
U103B 4066
U104 AN7367
U105A 4565
U105B 4565
U102B 2068SD
Q101 DTC363ES
Q102 2SC2002
Q103 DTC314TS
Q104 DTC314TS
Q105 DTC314TS
Q106 DTA124ES
L101 TRAP85K
L102 TRAP85KHz
L103 BIASCOIL
L104 10uH
L105 TRAP85KHz
L106 36mH
PLAY1
REC1
CANCELIN1
CANCELOUT1
ERASE1
REC3(G1)
TAPEOUT1
MUTE
BIAS1
65kHz
V+9
V+45
gbx
D102 1SS133
D103 1SS133
D104 1SS133
D105 1SS133
D106 1SS133

CH2

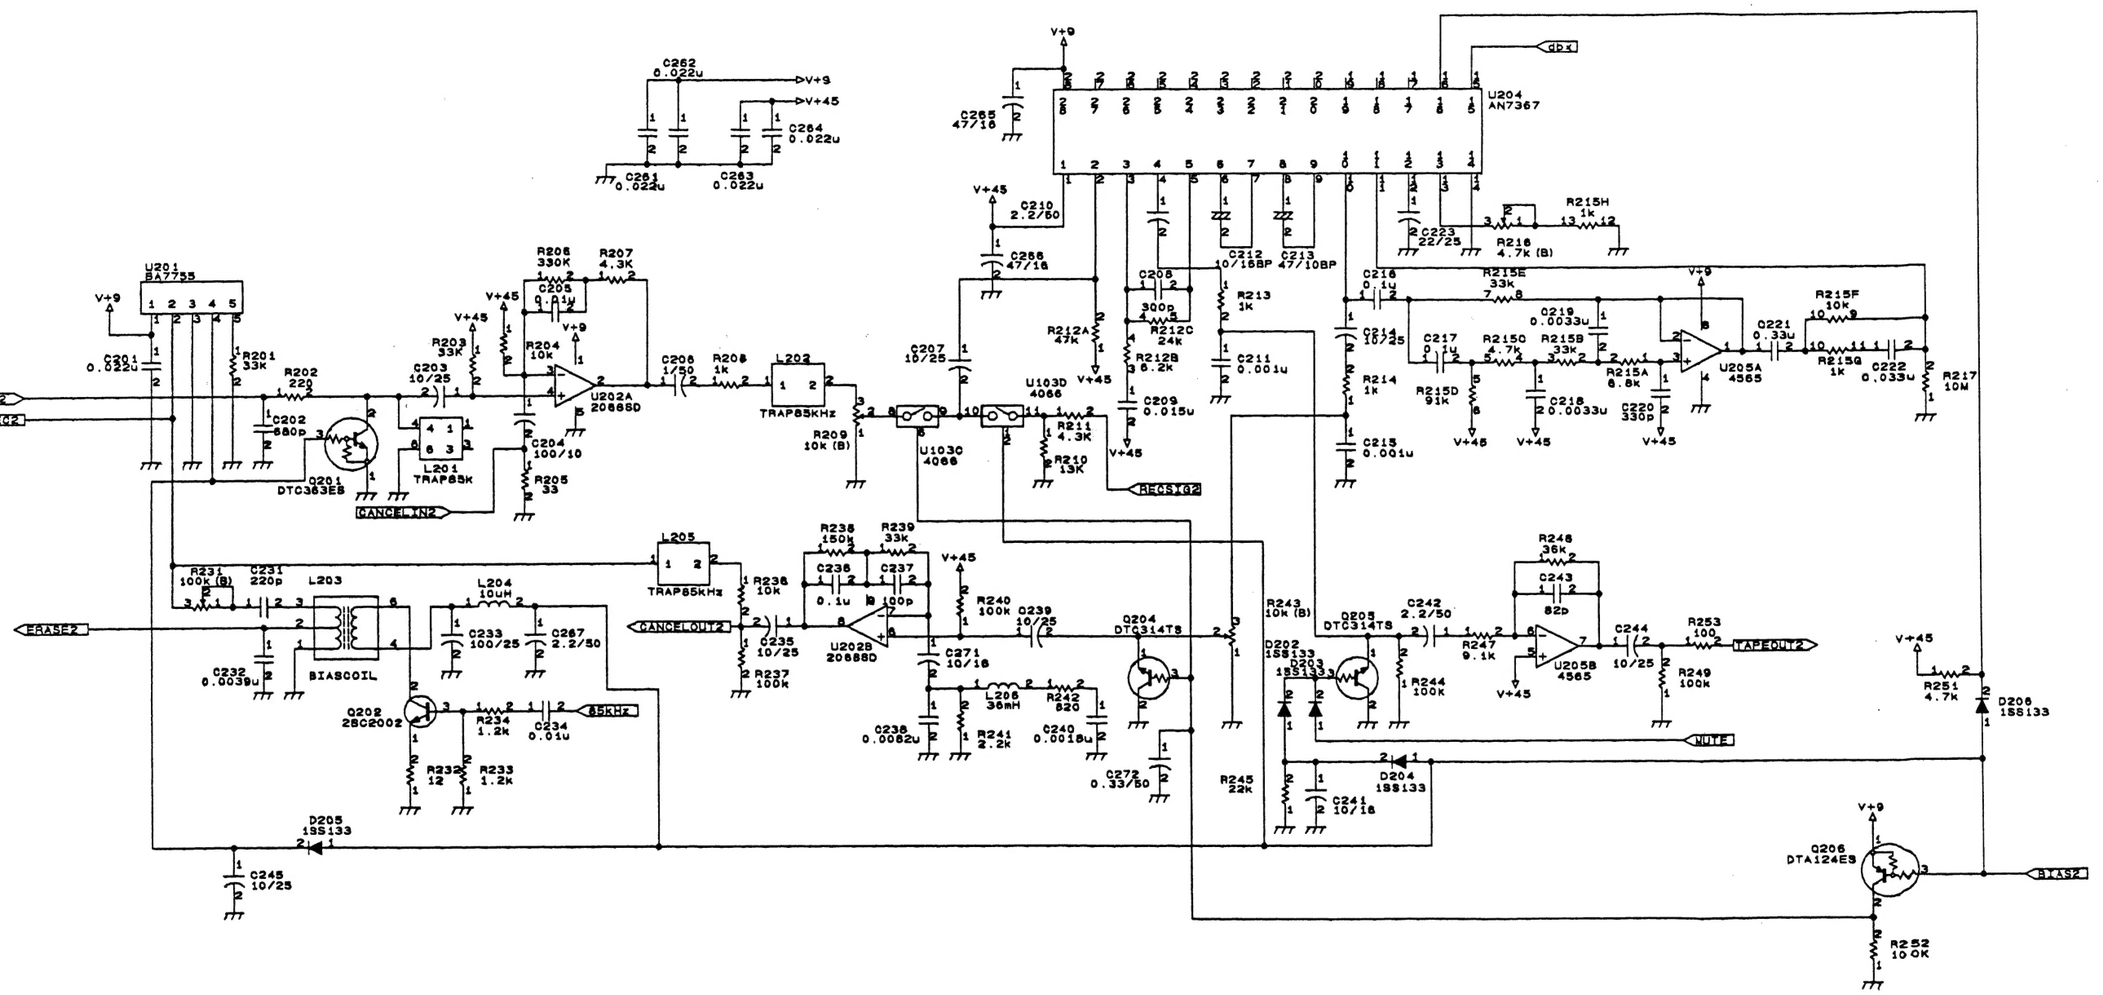
V+9
V+45
C262 0.022u
C264 0.022u
C261 0.022u
C263 0.022u
dpx
U204 AN7367
C265 47/16
C210 2.2/50
C256 47/16
R215H 1k
C223 22/25
R216 4.7k (B)
U201 BA7755
C201 0.022u
R201 33k
R202 22
PLAY2
REC2
C202 680p
Q201 DTC363EB
R206 330K
R207 4.3K
C205 0.01u
R204 10k
R203 33K
C203 10/25
CANCELIN2
L201 TRAP85K
R205 33
U202A 2068SD
C206 1/50
R208 1k
L202 TRAP85KHz
R209 10k (B)
C207 10/25
U103C 4066
U103D 4066
R212A 47K
R212B 6.2K
R212C 24K
C208 300p
C209 0.015u
R213 1k
C211 0.001u
R211 4.3K
R210 13K
RECSYG2
C212 10/16BP
C213 47/10BP
C216 0.1u
R215E 33k
C214 10/25
R214 1k
C215 0.001u
C217 0.1u
R215D 91k
R215C 4.7k
R215B 33k
C218 0.0033u
C219 0.0033u
R215A 6.8k
C220 330p
U205A 4565
C221 0.33u
R215F 10k
R215G 1k
C222 0.033u
R217 10M
L205 TRAP85kHz
R236 10k
C235 10/25
R235 150k
R239 33k
C236 0.1u
C237 100p
U202B 2068SD
R240 100K
C239 10/25
C271 10/16
L206 36mH
R242 820
C238 0.0062u
R241 2.2k
C240 0.0018u
Q204 DTC314TS
C272 0.33/50
R245 22k
R231 100k (B)
C231 220p
L203
L204 10uH
C233 100/25
C267 2.2/50
C232 0.0039u
BIASCOIL
Q202 2SC2002
R234 1.2k
C234 0.01u
85KHz
R232 12
R233 1.2k
ERASE2
CANCELOUT2
D205 1SS133
C245 10/25
R243 10k (B)
Q205 DTC314TS
D202 1SS133
D203 1SS133
C242 2.2/50
R247 9.1k
R244 100k
R248 36k
C243 82p
U205B 4565
C244 10/25
R253 100
R249 100k
TAPEOUT2
MUTE
D204 1SS133
C241 10/16
R251 4.7k
D206 1SS133
Q206 DTA124ES
R252 10.0K
BIAS2

CH3

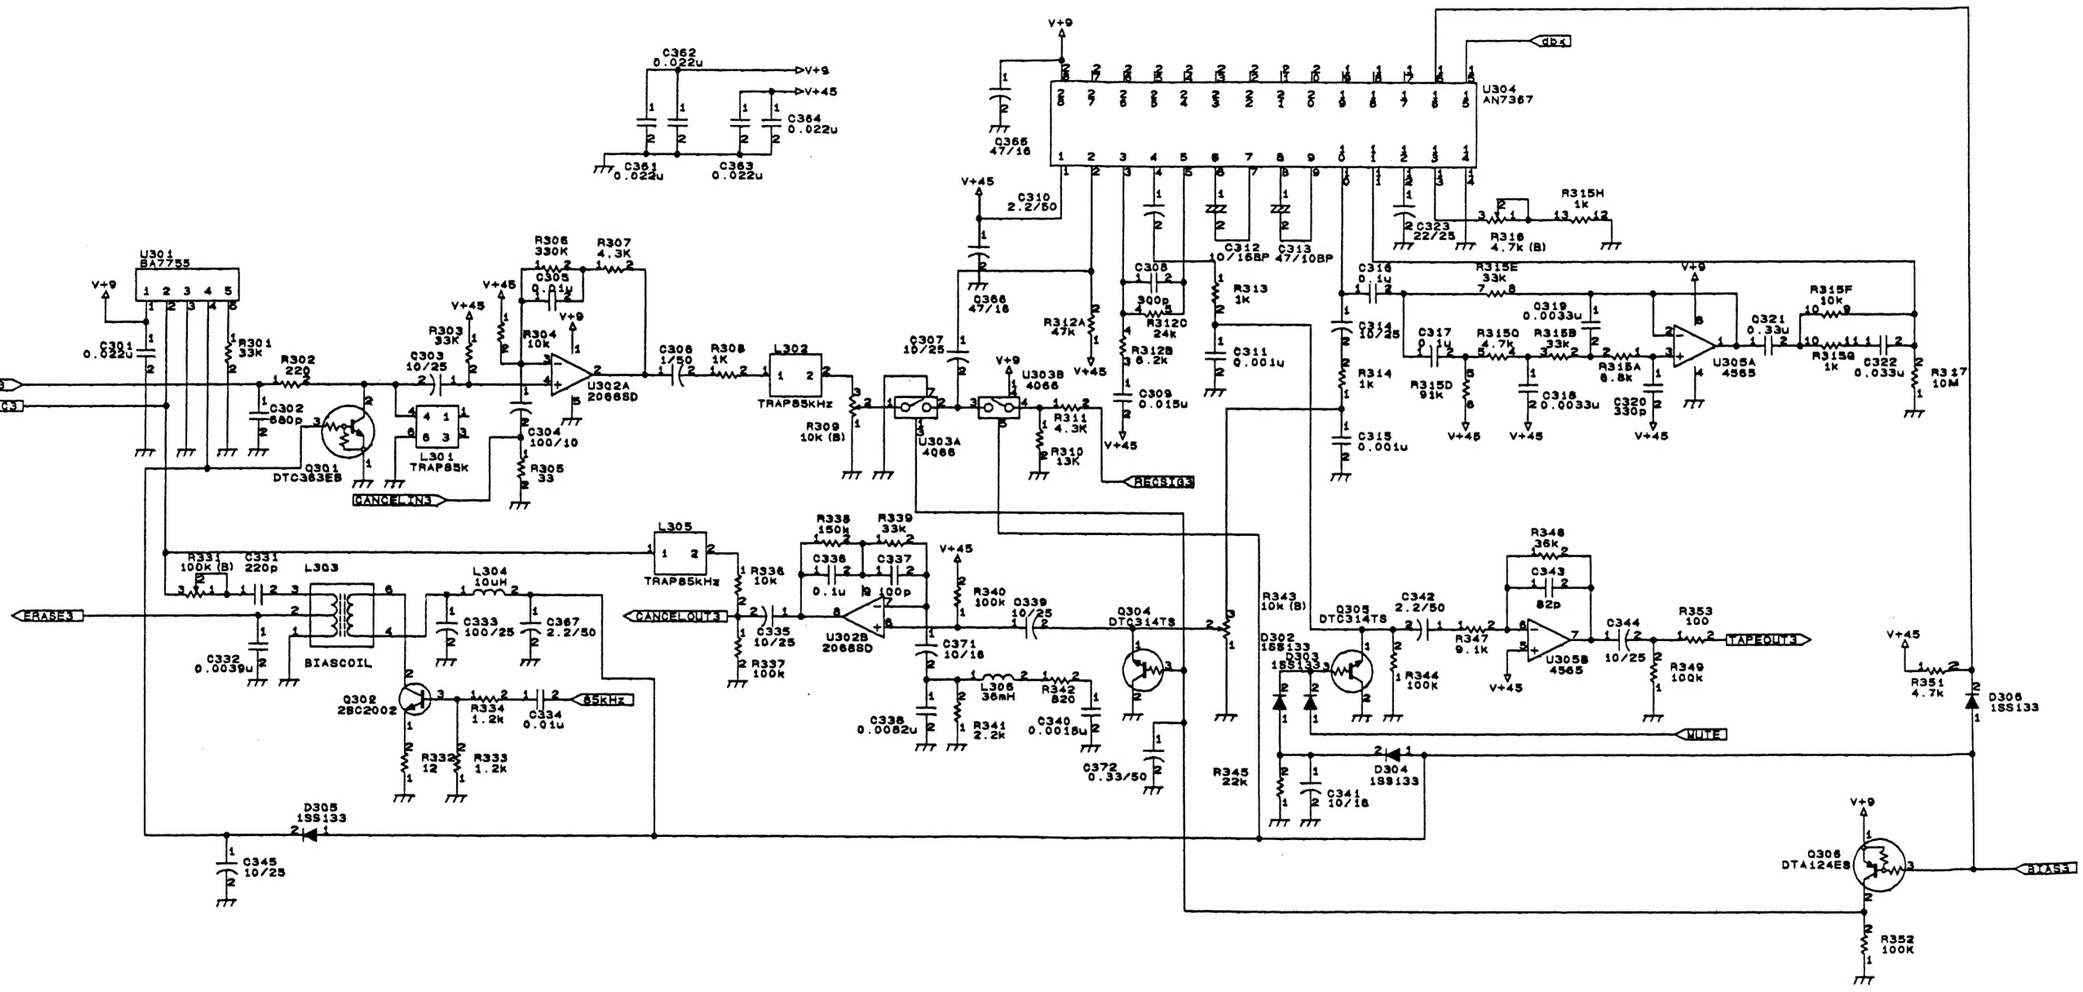
C362 0.022u
C364 0.022u
C361 0.022u
C363 0.022u
U304 AN7367
C365 47/16
C366 47/16
C310 2.2/50
C312 10/16BP
C313 47/10BP
R315H 1k
C323 22/25
R316 4.7k (B)
U301 BA7755
C301 0.022u
R301 33k
R302 220
C302 680p
Q301 DTC363EB
C303 10/25
R303 33K
R304 10k
C305 0.01u
R306 330K
R307 4.3K
U302A 2068SD
C304 100/10
R305 33
L301 TRAP85K
PLAY3
REC3
CANCEL IN3
C306 1/50
R308 1K
L302 TRAP85KHz
R309 10K (B)
C307 10/25
U303A 4066
U303B 4066
R312A 47k
R312B 8.2k
C308 300p
R312C 24k
C309 0.015u
R311 4.3K
R310 13K
REC3(3)
R313 1k
C311 0.001u
C316 0.1u
C314 10/25
R314 1k
C315 0.001u
R315E 33K
C317 0.1u
R315D 91k
R315C 4.7k
R315B 33k
R315A 8.8k
C319 0.0033u
C318 2 0.0033u
C320 330p
U305A 4565
C321 0.33u
R315F 10k
R315G 1k
C322 0.033u
R317 10M
L305 TRAP85kHz
R336 10k
C335 10/25
R337 100k
R338 150k
R339 33k
C336 0.1u
C337 100p
U302B 2068SD
R340 100k
C339 10/25
C371 10/16
L306 36mH
R342 820
C338 0.0082u
R341 2.2k
C340 0.0018u
Q304 DTC314TS
C372 0.33/50
R345 22K
R343 10k (B)
Q305 DTC314TS
D302 1SS133
D303 1SS133
C342 2.2/50
R347 9.1k
R348 36k
C343 82p
U305B 4565
C344 10/25
R353 100
R349 100k
TAPEOUT3
R344 100k
MUTE
D304 1SS133
C341 10/16
R351 4.7k
D306 1SS133
Q306 DTA124ES
R352 100K
BIAS3
ERASE3
R331 100K (B)
C331 220p
L303
BIASCOIL
L304 10uH
C333 100/25
C367 2.2/50
C332 0.0039u
Q302 2SC2002
R334 1.2k
C334 0.01u
85KHz
R332 12
R333 1.2k
D305 1SS133
C345 10/25
CANCEL OUT3
V+9
V+45

CH4

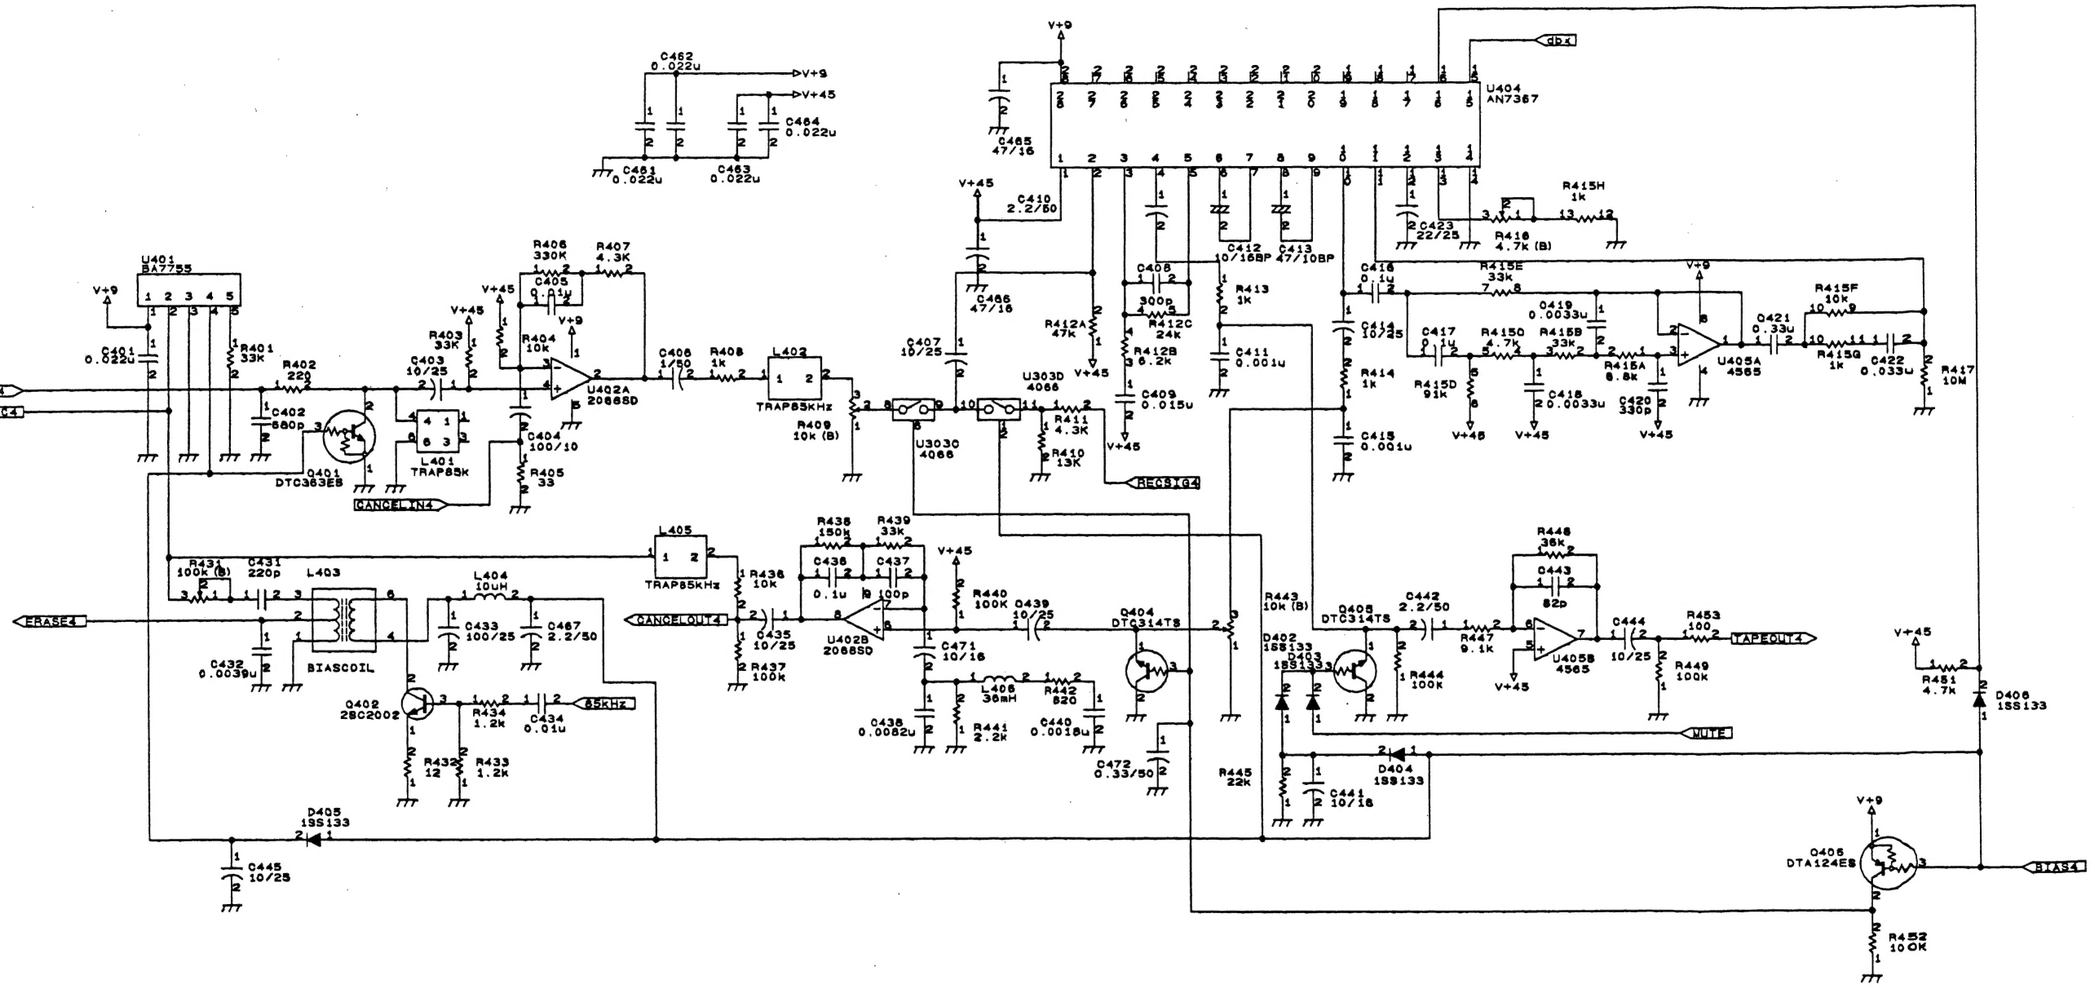
U401 BA7755
U402A 2068SD
U402B 2068SD
U303D 4066
U3030 4066
U404 AN7367
U405A 4565
U405B 4565
Q401 DTC363ES
Q402 2SC2002
Q404 DTC314TS
Q405 DTC314TS
Q406 DTA124ES
L401 TRAP85K
L402 TRAP85KHz
L403 BIASCOIL
L404 10uH
L405 TRAP85KHz
L406 36mH
D402 1SS133
D403 1SS133
D404 1SS133
D405 1SS133
D406 1SS133
PLAY4
REC4
CANCEL1N4
ERASE4
CANCELOUT4
REC81G4
TAPEOUT4
MUTE
BIAS4
85KHz
V+9
V+45
V-45
dbx

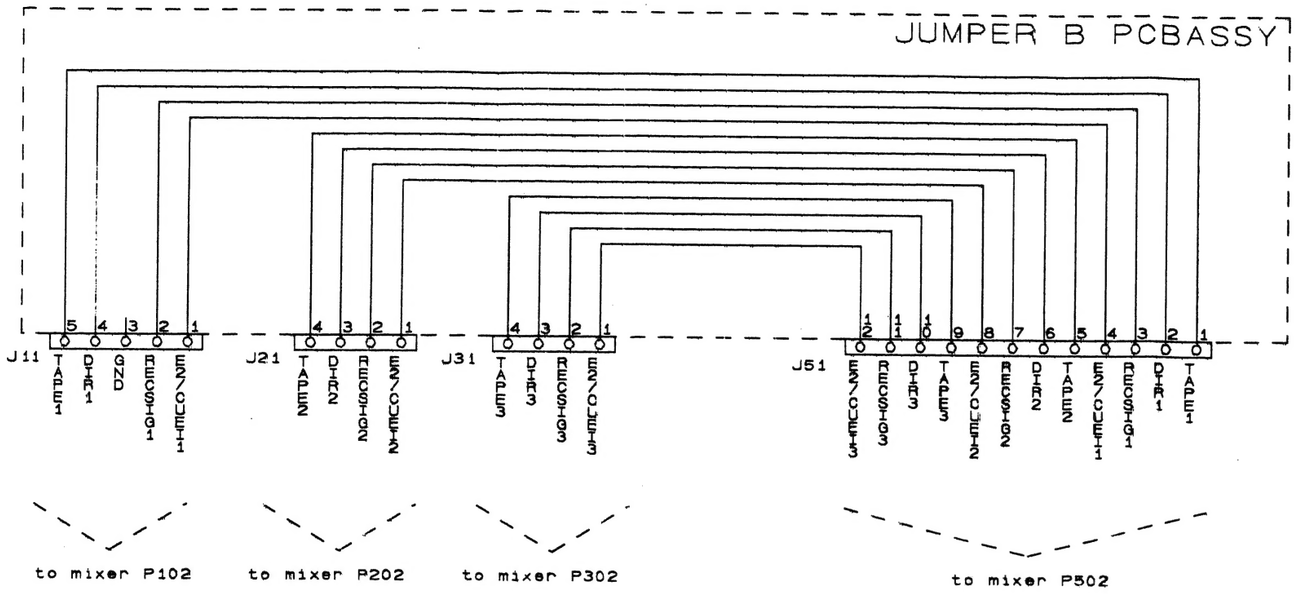
JUMPER B PCBASSY
J11
TAPE1
DIR1
GND
REGSIG1
ENCCNT1
J21
TAPE2
DIR2
REGSIG2
ENCCNT2
J31
TAPE3
DIR3
REGSIG3
ENCCNT3
J51
ENCCNT3
REGSIG3
DIR3
TAPE3
ENCCNT2
REGSIG2
DIR2
TAPE2
ENCCNT1
REGSIG1
DIR1
TAPE1
to mixer P102
to mixer P202
to mixer P302
to mixer P502

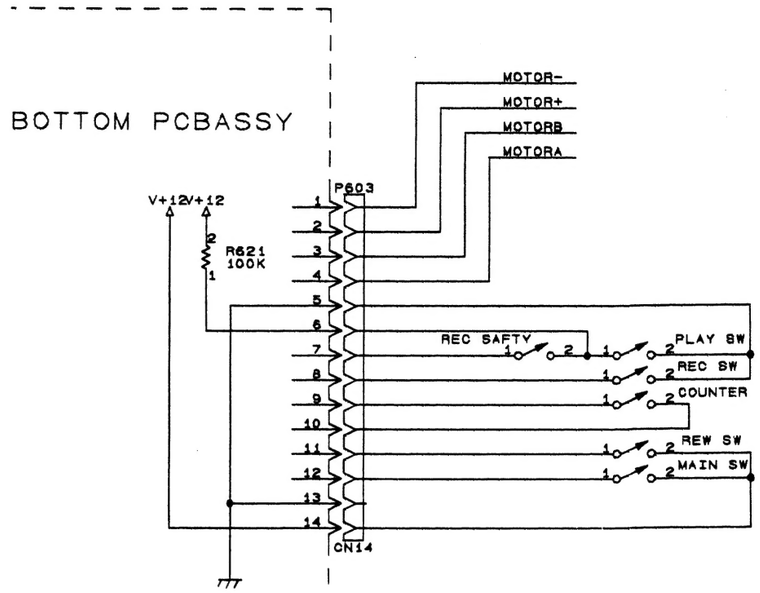
BOTTOM PCBASSY
MOTOR-
MOTOR+
MOTORB
MOTORA
V+12V+12
R621
100K
P603
CN14
REC SAFTY
PLAY SW
REC SW
COUNTER
REW SW
MAIN SW

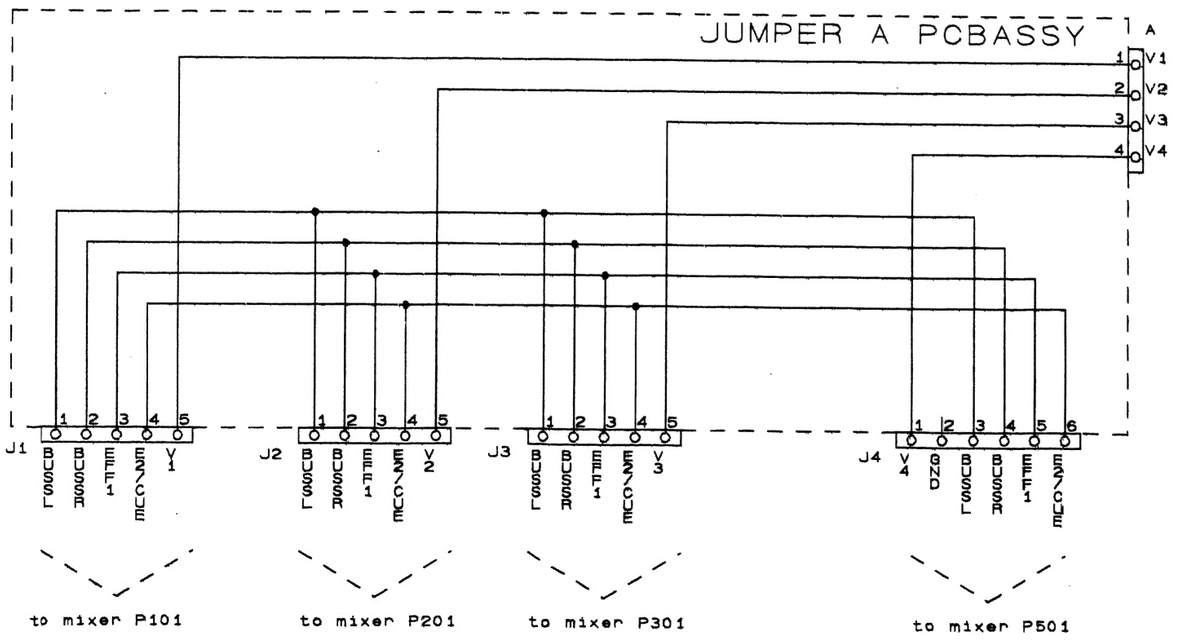
JUMPER A PCBASSY
J1
J2
J3
J4
V1
V2
V3
V4
to mixer P101
to mixer P201
to mixer P301
to mixer P501